


Southwire™

ROUGH ELECTRICAL COMPONENTS CATALOG





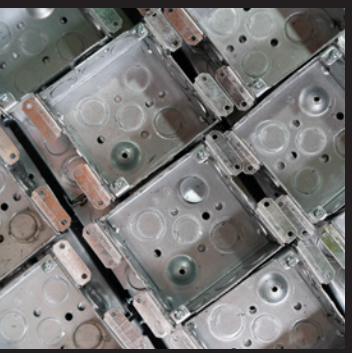










BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

SOUTHWIRE.COM





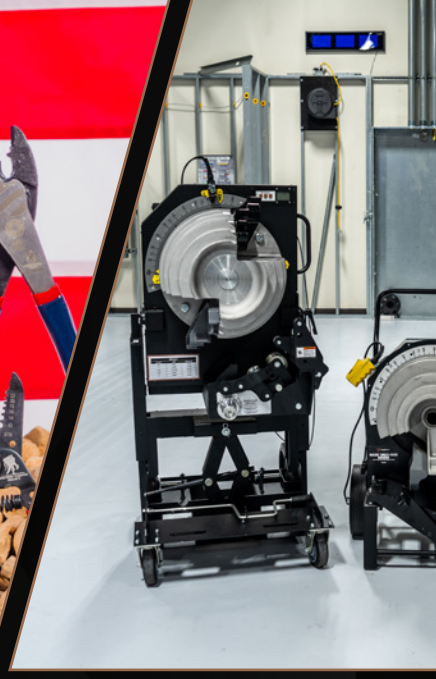

THE COMPLETE SOUTHWIRE® SOLUTION

WIRE AND CABLE | TOOLS AND EQUIPMENT | POWER MANAGEMENT
ELECTRICAL COMPONENTS | LIGHTING SOLUTIONS












XTREME BOX
XTREME BOX
XTREME BOX




MAXIS XD


Southwire
AUTOMATIC TRANSFER SWITCH
with REVERSE POLARITY PROTECTION
MODEL 41301 120V 30A 60 Hz
Southwire
AUTOMATIC TRANSFER SWITCH
REVERSE POLARITY PROTECTION
SURGE GUARD




Southwire
15190T





OUR STORY

As a family business, Southwire proudly continues building on our commitment to environmental stewardship and corporate sustainability by prioritizing stakeholder expectations, and supporting the wellbeing of our communities and the environment in which we live. To help us meet this commitment, we organize our sustainability strategy around five core tenets: Growing Green, Living Well, Giving Back, Doing Right, and Building Worth.

We Deliver Power…Responsibly®

We remain committed to the sustainability of our company for the next 100 years and beyond. As we strengthen this commitment, we continue to work hard every day to discover, develop and distribute sustainable solutions that exceed the expectations of our stakeholders around the world.

OUR MISSION

To be a ***preferred provider*** of solutions to the electrical industry by providing innovative products and services with exceptional quality.

OUR VALUES

Our ***ONE Southwire*** culture prioritizes the interests of our team members, customers, and communities through a continuous commitment to empowerment, trust, consistency, and inclusion.

OUR REACH

Nearly one in two new homes built in the United States contains our wire, and we produce half of the cable used to transmit and distribute electricity throughout the nation.

OUR PRODUCTS

Our product teams and dedicated resources work together to listen to and work with our customers, creating solutions that deliver unparalleled value through product innovation, safety and efficiency.

OUR SERVICE

Service is more than a word or a phone number; it's a tangible support system that assists you through the entire project cycle; from our knowledgeable customer service team, to our experienced field sales team, we're there every step of the way.



TABLE OF CONTENTS

CATEGORY	SECTION
EMT FITTINGS	1
LIQUIDTIGHT FITTINGS	2
BX, FLEX AND MC FITTINGS	3
NM CABLE FITTINGS	4
SERVICE ENTRANCE CABLE FITTINGS	5
CONDUIT BODIES	6
PVC ELBOWS AND FITTINGS	7
RIGID AND IMC FITTINGS	8
ELBOWS, COUPLINGS AND NIPPLES	9
BOXES AND COVERS	10
WEATHERPROOF	11
HANGING AND SUPPORT	12
GROUNDING AND WIRE ACCESSORIES	13
PANELS AND BREAKERS	14
INDEX	15

EMT FITTINGS

Southwire EMT connectors and couplings provide a secure connection for all EMT applications. Our comprehensive product line of UL listed steel and zinc fittings ensure high quality performance and longevity.

Zinc Compression Connectors and Couplings
Steel Compression Connectors and Couplings
Zinc Set Screw Connectors and Couplings
Steel Set Screw Connectors and Couplings
Raintight Connectors and Couplings
Combination Couplings
Slip Couplings
Pull Elbows
Straps
Bushings




EMT CONNECTORS AND COUPLINGS

COMPRESSION TYPE - STEEL



652S



FEATURES

- Compression type connectors and couplings
- Concrete tight
- Connectors: Assembled with a steel locknut
- Connectors: Available with insulated throat
- For size 2-1/2" to 4" also suitable for Rigid /IMC conduit

APPLICATIONS

- Connectors: Use to join EMT to box or enclosure
- Couplings: Use to join two lengths of EMT

STANDARD MATERIAL

- Steel

STANDARD FINISH

- Zinc plated

CERTIFICATIONS


- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
651S	1/2"	25	250	30	1.75"	1.390"	.406"
652S	3/4"	25	250	43	1.813"	1.390"	.406"
653S	1"	10	100	25	2"	1.560"	.406"
654S	1-1/4"	---	25	12	2.75"	1.888"	.50"
655S	1-1/2"	---	20	12	3"	2.438"	.50"
656S	2"	---	15	15	3.188"	2.938"	.688"
657S	2-1/2"	---	12	19	3.875"	3.688"	.75"
658S	3"	---	6	15	4.375"	4.313"	.938"
659S	3-1/2"	---	6	16	4.50"	4.875"	.938"
660S	4"	---	6	21	4.75"	5.375"	.938"

COMPRESSION TYPE WITH INSULATED THROAT - STEEL



652Si




PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
651SI	1/2"	25	250	30	1.75"	1.25"	.406"
652SI	3/4"	25	250	33	1.813"	1.563"	.406"
653SI	1"	10	100	28	2"	1.813"	.406"
654SI	1-1/4"	---	25	8	2.75"	1.885"	.50"
655SI	1-1/2"	---	20	9	3"	2.000"	.50"
656SI	2"	---	15	12	3.188"	2.080"	.688"
657SI	2-1/2"	---	12	19	3.875"	3.688"	.75"
658SI	3"	---	12	25	4.375"	4.313"	.938"
659SI	3-1/2"	---	6	15	4.50"	4.875"	.938"
660SI	4"	---	6	19	4.75"	5.375"	.938"

COMPRESSION TYPE COUPLING - STEEL



661S




PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
661S	1/2"	25	250	31	1.665"	1.25"
662S	3/4"	25	250	36	1.690"	1.563"
663S	1"	10	100	23	1.990"	1.813"
664S	1-1/4"	---	25	15	3.063"	2.188"
665S	1-1/2"	---	20	10	3.125"	2.438"
666S	2"	---	15	10	3.375"	2.938"
667S	2-1/2"	---	12	22	4.875"	3.688"
668S	3"	---	6	16	5.25"	4.313"
669S	3-1/2"	---	6	17	5.50"	4.875"
670S	4"	---	6	20	5.75"	5.375"

EMT RAINTIGHT CONNECTORS

COMPRESSION TYPE - STEEL



651SRT



RAINTIGHT

c UL us

FEATURES
- Compression type connectors
- Concrete tight and raintight
- Assembled with a steel locknut & gasket
- For size 2-1/2" to 4" also suitable for Rigid /IMC conduit

APPLICATIONS
- Use to join EMT to box or enclosure

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
651SRT	1/2"	25	250	30	.689"	.50"	1.125"
652SRT	3/4"	25	250	43	.75"	.50"	1.375"
653SRT	1"	10	100	25	.846"	.562"	1.687"
654SRT	1-1/4"	---	25	12	1.687"	1.012"	2.062"
655SRT	1-1/2"	---	20	12	1.717"	1.062"	2.25"
656SRT	2"	---	15	15	1.875"	1.125"	2.75"
657SRT	2-1/2"	---	12	19	1.968"	1.562"	3.625"
658SRT	3"	---	12	15	2.689"	1.562"	4.25"
659SRT	3-1/2"	---	5	16	2.812"	1.812"	4.687"
660SRT	4"	---	3	21	2.812"	1.812"	5.187"

COMPRESSION TYPE WITH INSULATED THROAT - STEEL



652SiRT



RAINTIGHT

c UL us

FEATURES
- Compression type connectors
- Concrete tight and raintight
- Assembled with a steel locknut & gasket
- Insulated throat
- For size 2-1/2" to 4" also suitable for Rigid /IMC conduit

APPLICATIONS
- Use to join EMT to box or enclosure

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
651SIRT	1/2"	25	250	28	.689"	.50"	1.125"
652SIRT	3/4"	25	250	38	.75"	.50"	1.375"
653SIRT	1"	10	100	27	.846"	.562"	1.687"
654SIRT	1-1/4"	---	25	12	1.687"	1.012"	2.062"
655SIRT	1-1/2"	---	20	9	1.717"	1.062"	2.25"
656SIRT	2"	---	15	12	1.875"	1.125"	2.75"
657SIRT	2-1/2"	---	12	20	1.968"	1.562"	3.625"
658SIRT	3"	---	6	13	2.689"	1.562"	4.25"
659SIRT	3-1/2"	---	5	13	2.812"	1.812"	4.687"
660SIRT	4"	---	3	9	2.812"	1.812"	5.187"

EMT RAINTIGHT COUPLINGS

COMPRESSION TYPE - STEEL



661SRT



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
661SRT	1/2"	25	250	35	1.625"	1.125"
662SRT	3/4"	25	250	25	1.75"	1.375"
663SRT	1"	10	100	28	1.875"	1.687"
664SRT	1-1/4"	---	25	15	2.25""	2.062"
665SRT	1-1/2"	---	20	15	2.25"	2.25"
666SRT	2"	---	15	18	2.375"	2.75"
667SRT	2-1/2"	---	12	14	3.875"	3.625"
668SRT	3"	---	6	19	4"	4.25"
669SRT	3-1/2"	---	5	21	4.687"	4.687"
670SRT	4"	---	6	15	4.937"	5.187"

FEATURES
- Compression type couplings
- Concrete tight and raintight
- Assembled with a steel locknut & gasket
- For size 2-1/2" to 4" also suitable for Rigid /IMC conduit

APPLICATIONS
- Use to join two lengths of EMT

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus

EMT SLIP COUPLINGS

COMPRESSION TYPE - STEEL



CSLP-100

Southwire SIMFab™ SOLUTIONS

LISTED

PART #	SIZE	MASTER QTY.
CSLP-50	1/2"	50
CSLP-75	3/4"	50
CSLP-100	1"	25
CSLP-125	1-1/4"	25
CSLP-150	1-1/2"	25
CSLP-200	2"	10
CSLP-250	2-1/2"	10
CSLP-300	3"	5
CSLP-350	3-1/2"	5
CSLP-400	4"	5


FEATURES
- Convenient sight hole ensures perfect connection of conduit
- Unique design allows installer to slide the coupling along the EMT conduit for a perfect fit
- Perfect for pre-fab installations
- Suitable for dry locations only
- Steel zinc plated
- UL Listed

APPLICATIONS
- Connects two lengths of EMT conduit.


SLIP ON...



SLIDE OVER...



LOCK DOWN



PATENT PUSH-IN AND QUICK LOCK STEEL CONNECTORS

NON-INSULATED



SICN-75



FEATURES
- Fastest way/time saving to install EMT conduits, as well as Rigid, IMC and RGC conduits & tool free, just push-in
- Over 80% quicker install than conventional fittings
- UL Standard 514B

APPLICATIONS
- UL 797 EMT conduits ½" to 4"
- UL 6 GRC, RMC, IMC conduit 2-1/2" to 4"

STANDARD MATERIAL
- Steel constructed

STANDARD FINISH
- Zinc Plated

CERTIFICATIONS
- UL and cUL listed
- UL file # E33622


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
SICN-50	1/2"	50	6.89	1.75"	1.36"	.68"
SICN-75	3/4"	50	9	1.76"	1.60"	.68"
SICN-100	1"	25	6.31	1.92"	1.84"	.73"
SICN-125	1 1/2"	25	10.85	2"	2.22"	.74"
SICN-150	1 1/2"	25	11.92	2.17"	2.54"	.81"
SICN-200	2"	10	6.49	2.43"	3"	.93"
SICN-250	2 1/2"	10	12.87	3.10"	3.90"	1.31"
SICN-300	3"	5	7.35	2.82"	4.48"	1.31"
SICN-350	3 1/2"	5	9.68	3"	5.16"	1.36"
SICN-400	4"	5	10.43	3.03"	5.63"	1.36"

2-1/2", 3", 3-1/2" and 4" are UL and cULus Listed for Rigid/IMC/EMT Conduits

WITH INSULATED THROAT



SICN-50I




PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
SICN-50I	1/2"	50	6.89	1.75"	1.36"	.68"
SICN-75I	3/4"	50	9	1.76"	1.60"	.68"
SICN-100I	1"	25	6.31	1.92"	1.84"	.73"
SICN-125I	1 1/2"	25	10.85	2"	2.22"	.74"
SICN-150I	1 1/2"	25	11.92	2.17"	2.54"	.81"
SICN-200I	2"	10	6.49	2.43"	3"	.93"
SICN-250I	2 1/2"	10	12.87	3.10"	3.90"	1.31"
SICN-300I	3"	5	7.35	2.82"	4.48"	1.31"
SICN-350I	3 1/2"	5	9.68	3"	5.16"	1.36"
SICN-400I	4"	5	10.43	3.03"	5.63"	1.36"

2-1/2", 3", 3-1/2" and 4" are UL and cULus Listed for Rigid/IMC/EMT Conduits

PATENT PUSH-IN AND QUICK LOCK STEEL COUPLINGS



SICP-50




PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
SICP-50	1/2"	50	9.4	2.70"	1.36"
SICP-75	3/4"	50	12.83	2.87"	1.60"
SICP-100	1"	25	9.13	3.14"	1.84"
SICP-125	1 1/2"	25	13.82	3.30"	2.22"
SICP-150	1 1/2"	25	15.77	3.39"	2.54"
SICP-200	2"	10	8.23	3.71"	3"
SICP-250	2 1/2"	10	16.24	4.27"	3.90"
SICP-300	3"	5	9.15	4.35"	4.48"
SICP-350	3 1/2"	5	12.21	4.60"	5.16"
SICP-400	4"	5	13.57	4.65"	5.63"

2-1/2", 3", 3-1/2" and 4" are UL and cULus Listed for Rigid/IMC/EMT Conduits

EMT CONNECTORS

SET SCREW TYPE - STEEL





PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
631S	1/2"	50	500	50	1.531"	1.325"	.438"
632S	3/4"	25	250	35	1.625"	1.440"	.469"
633S	1"	20	200	46	2.25"	1.625"	.563"
634S	1-1/4"	---	25	10	2.50"	2.25"	.563"
635S	1-1/2"	---	25	14	2.75"	2.75"	.563"
636S	2"	---	20	16	3.313"	3.563"	.75"
637S*	2-1/2"	---	12	17	3.813"	4.188"	.938"
638S*	3"	---	12	22	3.938"	4.688"	.938"
639S*	3-1/2"	---	6	15	4.188"	5.188"	1"
640S*	4"	---	6	17	3.75"	4.99"	1.05"

* EMT and Rigid

1/2" – 1" = 1 screw 1-1/4" – 4" = 2 screw

FEATURES
- Set screw type connectors
- Concrete tight when taped
- Assembled with a steel locknut
- Available with insulated throat

APPLICATIONS
- Use to join EMT to box or enclosure


STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

SET SCREW TYPE WITH INSULATED THROAT - STEEL





PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
631SI	1/2"	50	500	50	1.531"	1.385"	.438"
632SI	3/4"	25	250	35	1.625"	1.500"	.469"
633SI	1"	20	200	46	2.25"	1.685"	.563"
634SI	1-1/4"	---	25	10	2.50"	2.25"	.563"
635SI	1-1/2"	---	25	14	2.75"	2.75"	.563"
636SI	2"	---	20	16	3.313"	3.563"	.75"
637SI*	2-1/2"	---	12	17	3.813"	4.188"	.938"
638SI*	3"	---	12	22	3.938"	4.688"	.938"
639SI*	3-1/2"	---	6	15	4.188"	5.188"	1"
640SI*	4"	---	6	17	3.75"	4.99"	1.05"

* EMT and Rigid

1/2" – 1" = 1 screw 1-1/4" – 4" = 2 screw

FEATURES
- Set screw type connectors
- Concrete tight when taped
- Assembled with a steel locknut
- Insulated throat

APPLICATIONS
- Use to join EMT to box or enclosure

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

EMT COUPLINGS

SET SCREW TYPE - STEEL



641S



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
641S	1/2"	50	500	50	1.570"	.88"
642S	3/4"	25	250	38	1.825"	1.06"
643S	1"	10	100	24	2.030"	1.31"
644S	1-1/4"	---	25	11	3.25"	1.69"
645S	1-1/2"	---	25	17	3.75"	1.94"
646S	2"	---	20	18	4"	2.38"
647S*	2-1/2"	---	12	19	4.25"	3.19"
648S*	3"	---	12	26	4.50"	3.19"
649S*	3-1/2"	---	6	15	4.75"	4.31"
650S*	4"	---	6	17	5"	4.81"

* EMT and Rigid

1/2" – 1" = 2 screw 1-1/4" – 4" = 4 screw

FEATURES
- Set screw type connectors and couplings
- Concrete tight when taped

APPLICATIONS
- Couplings: Use to join two lengths of EMT


STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

EMT SET SCREW, CONDUIT CLOSURE CAPS

STEEL



CAPE50

SOUTHWIRE EXCLUSIVE

PART #	SIZE	MASTER QTY.
CAPE50	1/2"	50
CAPE75	3/4"	50
CAPE100	1"	25
CAPE125	1-1/4"	25
CAPE150	1-1/2"	10
CAPE200	2"	10
CAPE250	2-1/2"	5
CAPE300	3"	5
CAPE350	3-1/2"	5
CAPE400	4"	5

FEATURES
- Caps seal out rocks, dirt, debris, and anything vandals may use to clog the conduits that are set on the job site waiting for wire pulls
- One -piece quick set screw design does not require any taping and will not distort pipe threads

APPLICATIONS
- Vandal resistant pipe caps are used to protect EMT conduit runs that have been stubbed up and temporarily set in place or cap abandoned pipes

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

EMT SLIP COUPLINGS

SET SCREW TYPE - STEEL




SSLP-50SW



SSLP-125SW

1/2" – 1"= 3 screws 1-1/4" – 4"= 5 screws



FEATURES:

- Diamond Inspection Window to ensure EMT installed in proper position
- Allow EMT adjustment for perfect fit
- Suitable for prefab
- 1/2" to 4" for EMT application

APPLICATIONS

- Use to join two ends of EMT together. Backing out center screw allows coupling to be temporarily located on one cut end while adjacent end is slid into place.

STANDARD MATERIAL

- Steel


STANDARD FINISH


- Zinc plated

CERTIFICATIONS

- UL Standard: UL 514B
- CSA C22.2 No. 18
- NEMA FB 1

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
SSLP-50SW	1/2"	50	500	49	1.75"	.87"
SSLP-75SW	3/4"	25	250	31	1.88"	1.06"
SSLP-100SW	1"	10	100	19	2.06"	1.33"
SSLP-125SW	1-1/4"	---	25	9	2.49"	1.72"
SSLP-150SW	1-1/2"	---	25	12	2.88"	1.95"
SSLP-200SW	2"	---	20	14	3.41"	2.41"
SSLP-250SW	2-1/2"	---	12	16	4"	3.15"
SSLP-300SW	3"	---	12	22	4.50"	3.79"
SSLP-350SW	3-1/2"	---	6	12	4.53"	4.29"
SSLP-400SW	4"	---	6	16	5.25"	4.79"



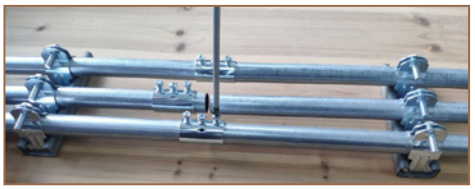


COMBINATION COUPLINGS

SET SCREW TYPE - EMT TO RIGID - STEEL



391S



FEATURES
- Ensures continued mechanical protection
- Concrete tight when taped

APPLICATIONS
- Indoor use only
- Use to join EMT conduit to Rigid metal conduit
- Can be used with EMT indoors only

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc plated

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	SCREWS
391S	1/2"	25	250	31	.85"	1.20"	.72"	.855"	2
392S	3/4"	10	100	19	1"	1.31"	.94"	1.065"	2
393S	1"	10	100	27	1.27"	1.53"	1.17"	1.32"	3

COMPRESSION TYPE - EMT TO LIQUIDTIGHT - STEEL



271



FEATURES
- Liquidtight, raintight, oiltight
- Compression type
- EMT to liquidtight
- Reusable ferrule

APPLICATIONS
- Use to connect LT conduit to EMT 1/2" through 1", ideal for rooftop HVAC air conditioners and motor hook-ups
- Can be used with EMT indoors only

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc plated

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
271	1/2"	25	250	20	1.64"	1.39"	1.09"
272	3/4"	20	200	14	1.75"	1.72"	1.30"
273	1"	10	100	16	2"	1.75"	1.50"

COMPRESSION TYPE EMT TO RIGID - STEEL



391C



FEATURES
- Internally threaded for Rigid/IMC conduit
- Compression type EMT
- Raintight

APPLICATIONS
- Suitable for indoor and outdoor use
- Use to join Rigid/IMC conduit to EMT between 2 different raceways
- Coupling internally threaded for Rigid/IMC
- Compression type for EMT, concrete tight

STANDARD MATERIAL
- Steel

STANDARD MATERIAL
- Zinc plated

CERTIFICATIONS
- UL standard 514B
- Fed. Spec. A-A-50553
- NEMA FB 1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
391C	1/2"	20	200	31	1.10"	1.57"
392C	3/4"	10	100	21	1.33"	1.62"
393C	1"	10	100	30	1.63"	1.82"

EMT CONNECTORS AND COUPLINGS

COMPRESSION TYPE - ZINC DIE CAST



651



c UL US

FEATURES

- Compression type connectors and couplings
- Concrete tight
- Assembled with a die cast locknut
- Connectors: Available with insulated throat
- For size 2-1/2" to 4" also suitable for Rigid /IMC conduit

APPLICATIONS

- Connectors: Use to join EMT to box or enclosure
- Couplings: Use to join two lengths of EMT

STANDARD MATERIAL

- Zinc die cast

CERTIFICATIONS


- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
651	1/2"	50	500	50	1.26"	1.26"	.42"
652	3/4"	25	250	35	1.34"	1.34"	.42"
653	1"	50	200	40	1.49"	1.49"	.525"
654	1-1/4"	---	25	10	1.67"	1.67"	.63"
655	1-1/2"	---	20	11	1.87"	1.87"	.62"
656	2"	---	15	12	2.01"	2.01"	.68"
657	2-1/2"	---	12	13	2.63"	2.63"	.86"
658	3"	---	12	16	2.77"	2.77"	1.01"
659TZ	3-1/2"	---	10	18	2.77"	2.77"	.94"
660TZ	4"	---	6	12	2.77"	2.77"	1"

COMPRESSION TYPE WITH INSULATED THROAT - ZINC DIE CAST



651i




c UL US

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
651I	1/2"	50	200	50	1.26"	1.26"	.42"
652I	3/4"	25	250	35	1.34"	1.34"	.42"
653I	1"	50	200	40	1.49"	1.49"	.525"
654I	1-1/4"	---	25	10	1.67"	1.67"	.63"
655I	1-1/2"	---	20	11	1.87"	1.87"	.62"
656I	2"	---	15	12	2.01"	2.01"	.68"
657I	2-1/2"	---	12	13	2.63"	2.63"	.86"
658I	3"	---	12	16	2.77"	2.77"	1.01"
659I	3-1/2"	---	10	18	2.77"	2.77"	.94"
660I	4"	---	6	12	2.77"	2.77"	1"

COMPRESSION TYPE COUPLING - ZINC DIE CAST



662



c UL US


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
661	1/2"	50	500	60	1.50"	1.10"
662	3/4"	25	250	48	1.62"	1.31"
663	1"	50	200	56	1.84"	1.67"
664	1-1/4"	---	25	11	2.05"	2.10"
665	1-1/2"	---	20	14	2.47"	2.30"
666	2"	---	15	14	2.56"	2.85"
667	2-1/2"	---	12	16	3.29"	3.70"
668	3"	---	12	21	3.42"	4.49"
669	3-1/2"	---	10	22	3.51"	5.06"
670	4"	---	6	15	3.54"	5.63"

EMT CONNECTORS

SET SCREW TYPE - ZINC DIE CAST



632



FEATURES

- Set screw type connectors
- Concrete tight when taped
- Assembled with a die cast locknut
- For size 2-1/2" to 4" also suitable for Rigid /IMC conduit

APPLICATIONS

- Connectors: Use to join EMT to box or enclosure

STANDARD MATERIAL

- Zinc die cast

CERTIFICATIONS

- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
631	1/2"	50	500	35	.92"	1.16"
632	3/4"	25	250	25	1.20"	1.28"
633	1"	---	50	30	1.46"	1.47"
634	1-1/4"	---	25	8	1.77"	1.86"
635	1-1/2"	---	25	10	2.05"	2.09"
636	2"	---	20	11	2.56"	2.38"
637*	2-1/2"	---	12	10	3.22"	2.93"
638*	3"	---	12	12	3.92"	2.96"
639*	3-1/2"	---	10	13	4.44"	3.43"
640*	4"	---	6	9	4.96"	3.60"

* EMT and Rigid 1/2" – 1" = 1 Screw 1-1/4" – 4 = 2 Screw

SET SCREW TYPE WITH INSULATED THROAT - ZINC DIE CAST



631i



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
631I	1/2"	50	500	35	.92"	1.16"
632I	3/4"	25	250	25	1.20"	1.28"
633I	1"	50	200	30	1.46"	1.47"
634I	1-1/4"	---	25	8	1.77"	1.86"
635I	1-1/2"	---	25	10	2.05"	2.09"
636I	2"	---	20	11	2.56"	2.38"
637I*	2-1/2"	---	12	10	3.22"	2.93"
638I*	3"	---	12	12	3.92"	2.96"
639I*	3-1/2"	---	10	13	4.44"	3.43"
640I*	4"	---	6	8	4.96"	3.60"


* EMT and Rigid 1/2" – 1" = 1 Screw 1-1/4" – 4 = 2 Screw

EMT COUPLINGS

SET SCREW TYPE COUPLING - ZINC DIE CAST



641



c UL us

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
641	1/2"	50	500	35	1.53"	.93"
642	3/4"	25	250	25	1.92"	1.16"
643	1"	50	200	28	1"	1.44"
644	1-1/4"	---	25	8	2.52"	1.84"
645	1-1/2"	---	25	15	2.85"	2.05"
646	2"	---	20	11	3.41"	2.51"
647	2-1/2"	---	12	9	4.21"	3.30"
648	3"	---	12	12	4.67"	4.01"
649	3-1/2"	---	10	12	4.85"	4.52"
650	4"	---	6	10	5.47"	5.01"

1/2"-1" – 2 Screw 1-1/4"-4" – 4 Screw

FEATURES

- Set screw type couplings
- Concrete tight when taped
- Assembled with a die cast locknut
- For size 2-1/2" to 4" also suitable for Rigid /IMC conduit

APPLICATIONS

- Couplings: Use to join two lengths of EMT

STANDARD MATERIAL

- Zinc die cast

CERTIFICATIONS


- UL Standard: 514B
- Fed. Spec. W-F-408E
- NEMA: FB 1

COMBINATION COUPLINGS

SET SCREW TYPE - EMT TO BX - ZINC DIE CAST



590



FEATURES
- Set screw type
- Combination coupling used to join BX cable to EMT

APPLICATIONS
- Indoor use only
- Use to join 1/2" EMT to 3/8" BX Cable

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
590	1/2" - 3/8"	25	250	15	1.25"	.93"	.78"

SCREW IN TYPE - EMT COMPRESSION TO FLEX - ZINC DIE CAST



131TZ



FEATURES
- Screw in to compression type
- Combination coupling used to join flexible metallic conduit to EMT

APPLICATIONS
- Indoor use only
- Use to join EMT conduit to flexible metallic conduit
- Suitable for: 1/2" steel, steel reduced wall, & aluminum flexible metal conduit to EMT, 3/4"-1" flexible metallic conduit to EMT

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
131TZ	1/2" - 1/2"	50	500	40	1.66"	1"	.723"
132TZ	3/4" - 3/4"	25	250	28	1.68"	1.18"	.931"
133TZ	1" - 1"	25	250	58	1.895"	1.625"	1.07"

SET SCREW TO CLAMP TYPE - EMT TO FLEX - ZINC DIE CAST



181



FEATURES
- Set screw to clamp type
- Tri-combo screw
- EMT to flex combination coupling

APPLICATIONS
- Indoor use only
- Use to join EMT conduit to flexible metallic conduit

STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap

CERTIFICATIONS
- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
181	1/2" - 1/2"	25	250	25	1.13"	1.66"	1.58"
182	3/4" - 3/4"	---	100	15	1.34"	1.91"	1.81"
182A	1" - 1"	---	50	13	1.58"	2.19"	2.13"

90° PULL ELBOWS

SET SCREW TYPE - EMT TO BOX - ZINC DIE CAST



371TZ



FEATURES
- Removable aluminum cover facilitates wire pulling
- Die cast locknut provided
- Neoprene gasket

APPLICATIONS
- Dry location use
- Use to connect EMT conduit to a metal outlet box or enclosure to form a 90° bend

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
371TZ	1/2"	10	100	22	1.31"	.93"	2.40"	1.80"
372TZ	3/4"	5	50	17	1.47"	1.22"	2.66"	2.14"

EMT AND RIGID COMBO TO BOX - ZINC DIE CAST



361SS



FEATURES
- EMT and Rigid combo to box pull elbows
- Removable cover facilitates wire pulling
- Neoprene gasket

APPLICATIONS
- Indoor or outdoor use
- Use to connect a run of threaded Rigid or IMC conduit to an outlet box or other metal enclosure
- Can be used with EMT indoors only

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
361SS	1/2"	10	100	31	1.31"	1.09"	2.40"	1.80"
362SS	3/4"	5	50	18	1.47"	1.29"	2.66"	2.14"
363SS	1"	---	25	21	2.80"	1.60"	3.66"	3.16"
364SS	1-1/4"	---	20	25	3.13"	1.96"	5.16"	3.24"


90° PULL ELBOWS

EMT AND RIGID COMBO - ZINC DIE CAST



352SS





FEATURES
- EMT and Rigid combo pull elbows
- Removable cover facilitates wire pulling
- Neoprene gasket

APPLICATIONS
- Indoor or outdoor use (Rigid only)
- Use as a wire pulling elbow to facilitate wire pulling through a sharp bend in a run of threaded Rigid or IMC conduit
- Can be used with EMT indoors only

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- UL Standard 514B
- NEMA FB 1

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
351SS	1/2"	10	100	28	1.31"	1.09"	2.50"	1.78"
352SS	3/4"	5	50	17	1.43"	1.29"	2.76"	2.13"
353SS	1"	---	25	16	1.95"	1.59"	3.86"	3.17"
354SS	1-1/4"	---	20	18	2.26"	1.97"	4.56"	3.25"

SET SCREW TYPE - EMT TO EMT - ZINC DIE CAST



381



FEATURES
- Corrosion resistant fabrication
- Removable cover facilitates wire pulling
- Neoprene gasket

APPLICATIONS
- Dry location use
- Use to connect EMT conduit together on a 90° bend

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
381	1/2"	10	100	24	1.31"	.94"	2.50"	1.78"
382	3/4"	5	50	19	1.59"	1.24"	2.76"	2.13"
383	1"	---	25	16	1.94"	1.61"	3.86"	3.17"
384	1-1/4"	---	20	20	2.26"	2"	4.56"	3.25"

EMT OFFSET CONNECTORS

SET SCREW TYPE - EMT TO BOX - ZINC DIE CAST



771



FEATURES
- Concrete tight when taped

APPLICATIONS
- Indoor or outdoor use
- Use to connect EMT conduit to a metal outlet box or enclosure where an offset is desired

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.	A	B	C
771	1/2"	10	100	12	2.10"	.94"	.52"
772	3/4"	10	100	19	3"	1.16"	.52"
773	1"	10	100	25	3.16"	1.42"	.67"

COMPRESSION TYPE - EMT TO BOX - ZINC DIE CAST



781TZ



FEATURES
- Concrete tight

APPLICATIONS
- Indoor or outdoor use
- Use to connect EMT conduit to a metal outlet box or enclosure where an offset is desired

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.	A	B	C
781TZ	1/2"	20	200	26	2.13"	1"	.52"
782TZ	3/4"	10	100	21	2.90"	1.19"	.75"

EMT 90° CONNECTORS

SET SCREW TYPE - ZINC DIE CAST



161



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
161	1/2"	25	250	40	1.66"	.52"
162TZ	3/4"	20	200	50	1.98"	.52"

FEATURES
- Concrete tight when taped
- For use with 1/2"-3/4" EMT

APPLICATIONS
- Indoor or outdoor use
- Short radius
- Use to connect EMT conduit to a steel outlet box or enclosure where a close radius is desired


STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

COMPRESSION TYPE - ZINC DIE CAST



431



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
431	1/2"	25	250	50	1.75"	.83"	.52"
432TZ	3/4"	20	200	52	1.86"	.95"	.52"
433	1"	10	100	46	2.21"	1.12"	.67"

FEATURES
- Concrete tight
- Exceptional wire pulling capability

APPLICATIONS
- Indoor or outdoor use
- Use to connect EMT conduit to a steel outlet box or enclosure where a large radius is desired


STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL

SET SCREW TYPE - EMT TO EMT - INSIDE CORNER - ZINC DIE CAST



341



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
341	1/2"	10	100	20	1.81"	1"
342	3/4"	5	50	15	2"	1.25"

FEATURES
- Set screw assembly provides concrete tight connections when taped
- Removable cover facilitates wire pulling

APPLICATIONS
- Dry location use
- Use to connect EMT conduit together on a 90° inside corner

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- UL

EMT STRAPS

SNAP-ON TYPE - ONE HOLE - STEEL



511



PART #	EMT SIZE	BOX QTY.	A	B
511	1/2"	100	1.79"	.57"
512	3/4"	50	1.96"	.62"
513	1"	25	2.25"	.75"
514	1-1/4"	20	2.85"	.88"
515	1-1/2"	20	3.16"	.99"
516	2"	10	3.93"	1.10"
517TZ*	2-1/2"	50	5"	1.28"
518TZ*	3"	25	5.55"	1.28"
519*	3-1/2"	25	6.37"	1.28"
520*	4"	25	6.87"	1.28"

*EMT and Rigid

FEATURES
- Snap-on type EMT strap with one hole
- Inverted rib for strength
- Easy to install

APPLICATIONS
- Indoor or outdoor use
- Use to support EMT conduit to wood, masonry or where greater load bearing is required

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 2239
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

SNAP-ON TYPE - TWO HOLE - STEEL



522



PART #	EMT SIZE	BOX QTY.
THS-25	1/4"	50
THS-38	3/8"	50
521TZ	1/2"	500
522	3/4"	500
523	1"	250
524	1-1/4"	50
525	1-1/2"	50
526	2"	50
527*	2-1/2"	50
528TZ*	3"	25
529TZ*	3-1/2"	25
530TZ*	4"	20

*EMT and Rigid

FEATURES
- Snap-on type EMT strap with two holes
- Greater load bearing capability
- Easy to install

APPLICATIONS
- Indoor or outdoor use
- Use to support EMT conduit to wood, masonry or where greater load bearing is required

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 2239
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

NAIL STRAP CONDUIT SUPPORT, WOOD STUD MOUNT

FLAT TYPE - STEEL



DS1TZ

FEATURES
- Stamped teeth and pointed tip prevent accidental pull out

APPLICATIONS
- Secures EMT or Rigid/IMC conduit to wood stud or surface

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus

PART #	FOR EMT CONDUIT	FOR RIGID CONDUIT	INNER QTY.	BOX QTY.
DS1TZ	1/2"	3/8"	100	1000
DS2	3/4"	1/2"	100	1000
DS3	1"	3/4"	100	1000

ONE HOLE RIGID CLAMP BACK SPACER



481

LISTED

FEATURES
- For use with malleable or aluminum straps

APPLICATIONS
- Indoor or outdoor use
- Use to provide spacing between mounting surface and EMT and Rigid conduit

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- cULus Listed

PART #	RIGID SIZE	INNER QTY.	MASTER QTY.
481	1/2"	25	250
482	3/4"	25	250
483	1"	25	125
484	1-1/4"	20	100
485	1-1/2"	10	100
486	2"	10	50
487	2-1/2"	5	25
488	3"	---	10
489	3-1/2"	---	10
489A	4"	---	10
489B	5"	---	2
489C	6"	---	2

EMT INSULATING BUSHINGS



1662



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1661	1/2"	100	1000	5	.522	.57
1662	3/4"	100	1000	6	.538	.764
1663	1"	50	500	5	.614	.954
1664	1-1/4"	25	250	4	.62	1.26
1665	1-1/2"	25	250	5	.62	1.44
1666	2"	20	200	5	.619	1.86
1667*	2-1/2"	---	25	1	1.12	2.34
1668*	3"	---	25	2	1.19	2.78
1669*	3-1/2"	---	25	2	1.22	3.27
1670*	4"	---	25	2	1.22	3.71

*EMT and Rigid

FEATURES
- Provides smooth, rounded surfaces at ends of raceways and avoids abrasion damage to cables

APPLICATIONS
- Indoor use only
- Protects cables in communications and security systems against abrasion from edge of EMT

STANDARD MATERIAL
- Polyethylene

SPLIT TYPE - POLYPROPYLENE



IBS-50

PART #	SIZE	MASTER QTY.
IBS-50	1/2"	50
IBS-75	3/4"	50



WRAPS AROUND EXISTING CABLES!

FEATURES
- Snap-on before or after cable pull
- No tools required to install
- Temperature rating of 105°C

APPLICATIONS
- Protects cable jacket from abrasion during installation

STANDARD MATERIAL
- Polypropylene

FLAT FLOOR CONDUIT PLUG - RUBBER



FFCP-50



FFCP-75



FFCP-100

PART #	FITS EMT SIZE	COLOR TABLE	MASTER QTY.
FFCP-50	1/2"	BLUE	50
FFCP-75	3/4"	ORANGE	50
FFCP-100	1"	BLACK	25



PUSH IN



SAFELY WALK ON JOB SITE!

FEATURES
- Durable rubber compound
- Easy push-in installation

APPLICATIONS
- Protects EMT opening on job site as well helps prevent "stub-up" conduit trip hazards.

SOUTHWIRE EXCLUSIVE

EMT FITTINGS

LIQUIDTIGHT FITTINGS

Ensure safe electrical service by making a secure connection with Southwire Liquidtight Connectors. By sealing out water, oil, dirt, dust and fumes, our Liquidtight Connectors and Conduit provide protection for electrical service in areas exposed to contaminants and vibrations and widely used in the mechanical, H/VAC and automotive industries.

Zinc Liquidtight Connectors, Straight and 90°
Malleable Iron Liquidtight Connectors, Straight, 90 and 45°
Malleable Iron Liquidtight Connectors, Straight, 90 and 45° with Lug
Metallic Liquidtight Conduit
NM Liquidtight Connectors, Straight and 90°
NM Liquidtight Conduit
Combination Couplings




STRAIGHT LIQUIDTIGHT CONNECTORS

ZINC



470



FEATURES
- Liquidtight, raintight, oiltight
- Straight connectors
- Assembled with a die cast locknut

APPLICATIONS
- For use with metallic and non-metallic "Type B" liquidtight conduit

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
470	3/8" 1/2" KO	20	200	36	1.446"	1.26"	.40"
471	1/2"	20	200	40	1.50"	1.385"	.42"
472	3/4"	10	100	23	1.603"	1.72"	.42"
473	1"	5	50	20	1.792"	1.90"	.55"
474	1-1/4"	5	50	30	1.90"	2.29"	.546"
475	1-1/2"	2	20	15	1.737"	2.633"	.52"
476	2"	2	20	24	2.08"	3.156"	.585"
477	2-1/2"	---	1	1	3.025"	4.205"	.775"
478	3"	---	1	2	3.53"	4.91"	.92"
479	3-1/2"	---	1	3	3.66"	5.47"	.92"
480	4"	---	1	4	3.875"	5.925"	.987"

WITH INSULATED THROAT - ZINC



470i



FEATURES
- Liquidtight, raintight, oiltight
- Straight connectors
- Assembled with a die cast locknut
- Insulated throat protects against abrasion damage

APPLICATIONS
- For use with metallic and non-metallic "Type B" liquidtight conduit

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
470I	3/8" 1/2" KO	20	200	40	1.446"	1.260"	.40"
471I	1/2"	20	200	34	1.50"	1.385"	.42"
472I	3/4"	10	100	25	1.603"	1.72"	.42"
473I	1"	5	50	22	1.792"	1.90"	.550"
474I	1-1/4"	5	50	34	1.90"	2.29"	.546"
475I	1-1/2"	2	20	18	1.937"	2.633"	.52"
476I	2"	2	20	28	2.08"	3.156"	.585"
LQA-1250-I	2-1/2"	___	1	1	3.025"	4.205"	.775"
LQA-1300-I	3"	___	1	2	3.53"	4.91"	.92"
LQA-1350-I	3-1/2"	___	1	3	3.66"	5.47"	.92"
LQA-1400-I	4"	___	1	4	3.875"	5.925"	.987"

STRAIGHT LIQUIDTIGHT CONNECTORS

WITH INSULATED THROAT - MALLEABLE IRON



470S



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
470S	3/8" 1/2" KO	20	200	31	1.18"	1.72"
471S	1/2"	20	200	33	1.36"	1.73"
472S	3/4"	10	100	25	1.61"	1.81"
473S	1"	5	50	18	1.89"	1.85"
474S	1-1/4"	5	50	28	2.39"	2.05"
475S	1-1/2"	2	20	15	2.62"	2.38"
476S	2"	2	20	22	3.24"	2.49"
477S	2-1/2"	---	1	2	3.89"	3.21"
478S	3"	---	1	3	4.74"	3.37"
479S	3-1/2"	---	1	4	5.31"	3.40"
480S	4"	---	1	5	5.82"	3.66"
480SA*	5"	---	1	10	6.06"	4.63"
480SB*	6"	---	1	13	7.75"	4.94"

*480SA and 480SB not UL listed

FEATURES

- Liquidtight, raintight, oiltight
- Tapered threaded male hub NPT
- Insulated throat protects conductors from abrasion damage
- Compact slim diameter with small turning radius
- Zinc electro plated for excellent durability

APPLICATIONS

- To secure, ground and seal liquidtight conduit to a box or enclosure
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIAL

- Malleable iron
- Steel locknut

STANDARD FINISH

- Zinc plated

CERTIFICATIONS


- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014

STRAIGHT LIQUIDTIGHT CONNECTORS

WITH INSULATED THROAT - STEEL



470ST



FEATURES
- Liquidtight, raintight, oiltight
- Industrial specification grade, screw machined steel
- Corrosion resistant protection from moisture & oils

APPLICATIONS
- Bonds liquidtight conduit to box or enclosure
- Straight type

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus

UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div. 2, Class II Div. 1 and 2, Class III Div. 1 and 2 are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
470ST	3/8" 1/2" KO	20	200	25	1.09"	1.19"	.63"
471ST	1/2"	20	200	31	1.19"	1.34"	.63"
472ST	3/4"	10	100	23	1.43"	1.43"	.63"
473ST	1"	5	50	18	1.75"	1.63"	.66"
474ST	1-1/4"	5	50	23	2.16"	1.84"	.67"
475ST	1-1/2"	2	20	12	2.38"	2"	.72"
476ST	2"	2	20	15	2.88"	2.13"	.72"

WITH INSULATED THROAT - 304 STAINLESS STEEL



LTCSS-38

LISTED

FEATURES
- For use with metallic and non-metallic type B
- Connectors can be easily disassembled and reused
- Sealing washers included
- Heavy duty stainless steel lock nuts included

APPLICATIONS
- Connects liquid-tight conduit to a box or enclosure in wet, damp & corrosive locations

STANDARD MATERIAL
- 304 stainless steel

CERTIFICATIONS
- UL Listed, CSA Listed


PART #	SIZE	MASTER QTY.
LTCSS-38	3/8"	20
LTCSS-50	1/2"	20
LTCSS-75	3/4'	10
LTCSS-100	1"	5
LTCSS-125	1-1/4"	5
LTCSS-150	1-1/2"	5
LTCSS-200	2"	5

STRAIGHT LIQUIDTIGHT CONNECTORS

WITH INSULATED THROAT - MALLEABLE IRON
HOT DIP GALVANIZED



471HDG



FEATURES
- Hot dip galvanized
- Liquidtight, raintight, oiltight
- Tapered threaded male hub NPT
- Insulated throat protects conductors from abrasion damage
- Compact slim diameter with small turning radius

APPLICATIONS
- To secure, ground and seal liquidtight conduit to a box or enclosure
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIAL
- Malleable iron
- Steel locknut

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014

c UL us

UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div. 2, Class II Div. 1 and 2, Class III Div. 1 and 2 are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1

PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
471HDG	1/2"	20	200	33	1.36"	1.73"
472HDG	3/4"	10	100	24	1.61"	1.81"
473HDG	1"	5	50	18	1.89"	1.85"
474HDG	1-1/4"	5	50	30	2.39"	2.05"
475HDG	1-1/2"	2	20	15	2.62"	2.38"
476HDG	2"	2	20	23	3.24"	2.49"
477HDG	2-1/2"	---	1	2	3.89"	3.21"
478HDG	3"	---	1	3	4.74"	3.37"
479HDG	3-1/2"	---	1	5	5.31"	3.40"
480HDG	4"	---	1	5	5.82"	3.66"

STRAIGHT LIQUIDTIGHT CONNECTORS


WITH GROUNDING LUG - MALLEABLE IRON



471SGR



473CSGR



FEATURES

- Liquidtight, raintight, oiltight
- Aluminum or Copper Lay-in grounding lug
- Insulated throat protects conductors from abrasion damage
- Zinc electro plated for excellent durability

APPLICATIONS

- Use to connect liquidtight conduit and terminate an external bonding conductor that runs parallel to the conduit
- The NEC code specifies length limitations and that the bonding jumper must be parallel to the conduit
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIAL

- Malleable iron
- Steel locknut
- Aluminum or Copper lug

STANDARD FINISH

- Zinc plated

CERTIFICATIONS

- UL 467 - UL 486A
- Fed. Spec: W-S-610E
- NEMA: GR 1-2017

c UL US


PART #	SIZE	LUG SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
ALUMINUM GROUNDING LUG							
470SGR	3/8"	14-4	10	100	22	1.18"	1.72"
471SGR	1/2"	14-4	10	100	23	1.36"	1.73"
472SGR	3/4"	14-4	5	50	18	1.61"	1.81"
473SGR	1"	14-4	5	50	24	1.89"	1.85"
474SGR	1-1/4"	14-4	2	20	16	2.39"	2.05"
475SGR	1-1/2"	14-4	2	20	18	2.62"	2.38"
476SGR	2"	14-4	2	20	27	3.24"	2.49"
477SGR	2-1/2"	1/0-14	---	1	7	3.89"	3.21"
478SGR	3"	1/0-14	---	1	8	4.74"	3.37"
479SGR	3-1/2"	6/250	---	1	8	5.31"	3.40"
480SGR	4"	6/250	---	1	10	5.82"	3.66"
COPPER GROUNDING LUG							
471CSGR	1/2"	14-4	10	100	24	1.36"	1.73"
472CSGR	3/4"	14-4	5	50	16	1.61"	1.81"
473CSGR	1"	14-4	5	50	22	1.89"	1.85"
474CSGR	1-1/4"	14-4	2	20	14	2.39"	2.05"
475CSGR	1-1/2"	14-4	2	20	17	2.62"	2.38"
476CSGR	2"	14-4	2	20	26	3.24"	2.49"

90° LIQUIDTIGHT CONNECTORS

ZINC



491



FEATURES
- Liquidtight, raintight, oiltight
- 90° connectors
- Assembled with a die cast locknut

APPLICATIONS
- For use with metallic and non-metallic "Type B" liquidtight conduit

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
490	3/8" 1/2" KO	10	100	27	2.062"	2.34"	.52"
491	1/2"	10	100	28	2.22"	2.34"	.52"
492	3/4"	10	100	38	2.55"	3.55"	.68"
493	1"	5	50	32	2.82"	3.785"	.67"
494	1-1/4"	2	20	20	3.362"	3.96"	.70"
495	1-1/2"	2	20	26	3.45"	4.13"	.70"
496	2"	1	10	19	4.036"	4.70"	.57"
497	2-1/2"	---	1	4	5.215"	5.375"	.77"
498	3"	---	1	5	6.10"	6.50"	1.10"
499	3-1/2"	---	1	6	6.715"	7.45"	1.10"
500	4"	---	1	7	6.78"	8"	1.10"

WITH INSULATED THROAT - ZINC



490i



FEATURES
- Liquidtight, raintight, oiltight
- 90° connectors
- Assembled with a die cast locknut
- Insulated throat protects against abrasion damage

APPLICATIONS
- For use with metallic and non-metallic "Type B" liquidtight conduit

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
490I	3/8" 1/2" KO	10	100	30	2.062"	2.34"	.52"
491I	1/2"	10	100	27	2.22"	2.34"	.52"
492I	3/4"	10	100	39	2.55"	3.55"	.68"
493I	1"	5	50	33	2.82"	3.785"	.67"
494I	1-1/4"	2	20	21	3.362"	3.96"	.70"
495I	1-1/2"	2	20	26	3.45"	4.13"	.70"
496I	2"	1	10	20	4.036"	4.70"	.57"

90° LIQUIDTIGHT CONNECTORS

WITH INSULATED THROAT - MALLEABLE IRON



490S



FEATURES

- Liquidtight, raintight, oiltight
- Suitable for wet location use
- Tapered threaded male hub NPT
- Insulated throat protects conductors from abrasion damage
- Compact slim diameter with small turning radius
- Zinc electro plated for excellent durability

APPLICATIONS

- To secure, ground and seal liquidtight conduit to a box or enclosure
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIAL

- Malleable iron
- Steel locknut

STANDARD FINISH

- Zinc plated

c UL us


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
490S	3/8" 1/2" KO	10	100	26	1.18"	1.96"	2.47"
491S	1/2"	10	100	28	1.36"	2.10"	2.54"
492S	3/4"	10	100	41	1.61"	2.45"	2.82"
493S	1"	5	50	31	1.89"	2.83"	3.08"
494S	1-1/4"	2	20	20	2.39"	3.15"	3.53"
495S	1-1/2"	2	20	25	2.62"	3.50"	4.17"
496S	2"	1	10	19	3.24"	4.02"	4.69"
497S	2-1/2"	---	1	5	3.89"	6.23"	6.74"
498S	3"	---	1	7	4.74"	6.91"	7.52"
499S	3-1/2"	---	1	9	5.31"	7.57"	7.93"
500S	4"	---	1	14	5.82"	8.07"	8.72"

90° LIQUIDTIGHT CONNECTORS

WITH INSULATED THROAT - MALLEABLE IRON
HOT DIP GALVANIZED



491HDG

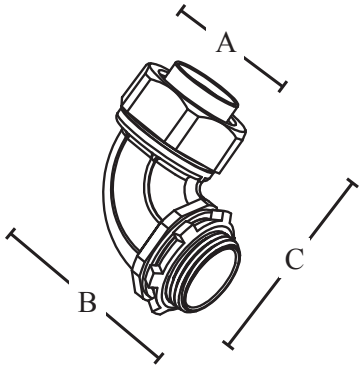

FEATURES

- Hot dip galvanized
- Liquidtight, raintight, oiltight
- Suitable for wet location use
- Tapered threaded male hub NPT
- Insulated throat protects conductors from abrasion damage
- Compact slim diameter with small turning radius

APPLICATIONS

- To secure, ground and seal liquidtight conduit to a box or enclosure
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIAL

- Malleable iron
- Steel locknut

STANDARD FINISH

- Hot dip galvanized

UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div. 2, Class II Div. 1 and 2, Class III Div. 1 and 2 are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1

PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
491HDG	1/2"	10	100	28	1.36"	2.10"	2.54"
492HDG	3/4"	10	100	41	1.61"	2.45"	2.82"
493HDG	1"	5	50	31	1.89"	2.83"	3.08"
494HDG	1-1/4"	2	20	21	2.39"	3.15"	3.53"
495HDG	1-1/2"	2	20	25	2.62"	3.50"	4.17"
496HDG	2"	---	10	18	3.24"	4.02"	4.69"
498HDG	3"	---	1	7	4.74"	6.91"	7.52"

90° LIQUIDTIGHT CONNECTORS


WITH GROUNDING LUG - MALLEABLE IRON



490SGR



490CSGR



FEATURES

- Liquidtight, raintight, oiltight
- Aluminum or Copper Lay-in grounding lug
- Insulated throat protects conductors from abrasion damage
- Zinc electro plated for excellent durability

APPLICATIONS

- Use to connect liquidtight conduit and terminate an external bonding conductor that runs parallel to the conduit
- The NEC code specifies length limitations and that the bonding jumper must be parallel to the conduit
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIAL

- Malleable iron
- Steel locknut
- Aluminum or Copper lug

STANDARD FINISH

- Zinc plated

CERTIFICATIONS

- UL 467 - UL 486A
- Fed. Spec: W-S-610E
- NEMA: GR 1-2017

c UL us

PART #	SIZE	LUG SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
ALUMINUM GROUNDING LUG								
490SGR	3/8"	14-4	5	50	17	1.18"	1.96"	2.47"
491SGR	1/2"	14-4	5	50	24	1.36"	2.10"	2.54"
492SGR	3/4"	14-4	2	20	16	1.61"	2.45"	2.82"
493SGR	1"	14-4	2	20	17	1.89"	2.83"	3.08"
494SGR	1-1/4"	14-4	2	20	25	2.39"	3.15"	3.53"
495SGR	1-1/2"	14-4	2	20	29	2.62"	3.50"	4.17"
496SGR	2"	14-4	2	20	42	3.24"	4.02"	4.69"
497SGR	2-1/2"	1/0-14	---	1	9	3.89"	6.23"	6.74"
498SGR	3"	1/0-14	---	1	11	4.74"	6.91"	7.52"
499SGR	3-1/2"	6/250	---	1	13	5.31"	7.57"	7.93"
500SGR	4"	6/250	---	1	15	5.82"	8.07"	8.72"
COPPER GROUNDING LUG								
491CSGR	1/2"	14-4	5	50	18	1.36"	2.10"	2.54"
492CSGR	3/4"	14-4	2	20	11	1.61"	2.45"	2.82"
493CSGR	1"	14-4	2	20	15	1.89"	2.83"	3.08"
494CSGR	1-1/4"	14-4	2	20	21	2.39"	3.15"	3.53"
495CSGR	1-1/2"	14-4	2	20	26	2.62"	3.50"	4.17"
496CSGR	2"	14-4	2	20	41	3.24"	4.02"	4.69"

90° LIQUIDTIGHT CONNECTORS

304 STAINLESS STEEL



LTCSS-5090

LISTED

PART #	SIZE	MASTER QTY.
LTCSS-5090	1/2"	20
LTCSS-7590	3/4'	20
LTCSS-10090	1"	5
LTCSS-12590	1-1/4"	5
LTCSS-15090	1-1/2"	5
LTCSS-20090	2"	5

FEATURES

- For use with metallic and non-metallic type B
- Connectors can be easily disassembled and reused
- Sealing washers included
- Heavy duty stainless steel lock nuts included

APPLICATIONS

- Connects liquid-tight conduit to a box or enclosure in wet, damp & corrosive locations

STANDARD MATERIAL

- 304 stainless steel

CERTIFICATIONS


- UL Listed, CSA Listed

45° LIQUIDTIGHT CONNECTORS

WITH INSULATED THROAT - MALLEABLE IRON



230S



c UL us

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
230S	3/8" 1/2" KO	10	100	24	1.18"	1.39"	2.51"
231S	1/2"	10	100	28	1.36"	1.50"	2.51"
232S	3/4"	10	100	42	1.61"	1.73"	2.70"
233S	1"	5	50	32	1.89"	2.11"	3.05"
234S	1-1/4"	2	20	22	2.39"	2.56"	3.65"
235S	1-1/2"	2	20	32	2.62"	2.77"	4.01"
236S	2"	2	20	49	3.24"	3.38"	4.64"
237S	2-1/2"	---	1	5	3.89"	4.68"	6.46"
238S	3"	---	1	7	4.74"	5.33"	7.01"
239S	3-1/2"	---	1	10	5.31"	5.81"	7.33"
240S	4"	---	1	12	5.82"	6.42"	8.20"

FEATURES

- Liquidtight, raintight, oiltight
- Suitable for wet locations
- Tapered threaded male hub NPT
- Insulated throat protects conductors from abrasion damage
- Compact slim diameter with small turning radius
- Zinc electro plated for excellent durability

APPLICATIONS

- To secure, ground and seal liquidtight conduit to a box or enclosure
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIAL

- Malleable iron
- Steel locknut

STANDARD FINISH

- Zinc plated

CERTIFICATIONS


- cULus

45° LIQUIDTIGHT CONNECTORS

WITH INSULATED THROAT - MALLEABLE IRON HOT DIP GALVANIZED



231HDG



FEATURES

- Hot dip galvanized
- Liquidtight, raintight, oiltight
- Suitable for wet locations
- Tapered threaded male hub NPT
- Insulated throat protects conductors from abrasion damage
- Compact slim diameter with small turning radius

APPLICATIONS

- To secure, ground and seal liquidtight conduit to a box or enclosure
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIAL

- Malleable iron
- Steel locknut

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- cULus

UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div. 2, Class II Div. 1 and 2, Class III Div. 1 and 2 are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1

PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
231HDG	1/2"	10	100	25	1.36"	1.50"	2.51"
232HDG	3/4"	10	100	35	1.61"	1.73"	2.70"
233HDG	1"	5	50	26	1.89"	2.11"	3.05"
234HDG	1-1/4"	2	20	19	2.39"	2.56"	3.65"
235HDG	1-1/2"	2	20	23	2.62"	2.77"	4.01"
236HDG	2"	2	20	34	3.24"	3.38"	4.64"

45° LIQUIDTIGHT CONNECTORS


WITH GROUNDING LUG - MALLEABLE IRON



230SGR



230CSGR



FEATURES

- Liquidtight, raintight, oiltight
- Aluminum or Copper Lay-in grounding lug
- Insulated throat protects conductors from abrasion damage
- Zinc electro plated for excellent durability

APPLICATIONS

- Use to connect liquidtight conduit and terminate an external bonding conductor that runs parallel to the conduit
- The NEC code specifies length limitations and that the bonding jumper must be parallel to the conduit
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIAL

- Malleable iron
- Steel locknut
- Aluminum or Copper lug

STANDARD FINISH

- Zinc plated

CERTIFICATIONS

- UL 467 - UL 486A
- Fed. Spec: W-S-610E
- NEMA: GR 1-2017

c UL US


PART #	SIZE	LUG SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
ALUMINUM GROUNDING LUG								
230SGR	3/8"	14-4	5	50	16	1.18"	1.39"	2.51"
231SGR	1/2"	14-4	5	50	17	1.36"	1.50"	2.51"
232SGR	3/4"	14-4	2	50	24	1.61"	1.73"	2.70"
233SGR	1"	14-4	2	20	16	1.89"	2.11"	3.05"
234SGR	1-1/4"	14-4	2	20	24	2.39"	2.56"	3.65"
235SGR	1-1/2"	14-4	2	20	26	2.62"	2.77"	4.01"
236SGR	2"	14-4	2	20	37	3.24"	3.38"	4.64"
237SGR	2-1/2"	1/0-14	---	1	8	3.89"	4.68"	6.46"
238SGR	3"	1/0-14	---	1	11	4.74"	5.33"	7.01"
239SGR	3-1/2"	6/250	---	1	12	5.31"	5.81"	7.33"
240SGR	4"	6/250	---	1	14	5.82"	6.42"	8.20"
COPPER GROUNDING LUG								
231CSGR	1/2"	14-4	5	50	17	1.36"	1.50"	2.51"
232CSGR	3/4"	14-4	5	50	24	1.61"	1.73"	2.70"
233CSGR	1"	14-4	2	20	16	1.89"	2.11"	3.05"
234CSGR	1-1/4"	14-4	2	20	24	2.39"	2.56"	3.65"
235CSGR	1-1/2"	14-4	2	20	26	2.62"	2.77"	4.01"
236CSGR	2"	14-4	2	20	37	3.24"	3.38"	4.64"

COMBINATION COUPLINGS

LIQUIDTIGHT TO RIGID - STEEL



50SLT



FEATURES
- Liquidtight, raintight, oiltight
- NPSM thread
- Labor saving

APPLICATIONS
- Use to join liquidtight metal conduit (LFMC) to Rigid/IMC conduit between 2 different raceways
- Suitable for use in wet locations
- Raintight, concrete tight

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: A-A-50553
- NEMA: FB 1

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
50SLT	3/8" - 1/2"	20	200	33	1.10"	1.78"
51SLT	1/2"	20	200	29	1.17"	1.78"
52SLT	3/4"	10	100	23	1.43"	1.94"
53SLT	1"	5	50	18	1.76"	2.19"
54SLT	1-1/4"	5	50	30	2.16"	2.23"
55SLT	1-1/2"	-	12	8	2.38"	2.62"
56SLT	2"	-	5	5	2.87"	2.67"

COMPRESSION TYPE - EMT TO LIQUIDTIGHT - STEEL



271



FEATURES
- Liquidtight, raintight, oiltight
- Compression type
- EMT to liquidtight
- Reusable ferrule

APPLICATIONS
- Use to connect LT conduit to EMT 1/2" thru 1", ideal for rooftop HVAC air conditioners and motor hook-ups
- Can be used with EMT indoors only

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
271	1/2"	25	250	20	1.64"	1.39"	1.09"
272	3/4"	20	200	14	1.75"	1.72"	1.30"
273	1"	10	100	16	2"	1.75"	1.50"

STRAIGHT LIQUIDTIGHT CONNECTORS

GRAY - NYLON



P471



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
P470	3/8" 1/2" KO	25	100	7	2.04"	1.43"
P471	1/2"	25	100	6	2.11"	1.43"
P472	3/4"	10	100	8	2.20"	1.68"
P473	1"	5	50	12	2.28"	1.99"
P474	1-1/4"	5	50	12	2.46"	2.39"
P475	1-1/2"	5	20	14	2.72"	2.65"
P476	2"	2	20	9	3.05"	3.22"

FEATURES
- Liquidtight, raintight, oiltight
- For flexible non-metallic liquidtight tubing
- Easy assembly avoids having to remove the compression nut
- Straight type
- Gray

APPLICATIONS
- For use in wet and dry locations


STANDARD MATERIAL
- 6/6 Nylon

CERTIFICATIONS
- cULus

BLACK - NYLON



P470B



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
P470B	3/8" 1/2" KO	25	100	7	2.04"	1.43"
P471B	1/2"	25	100	6	2.11"	1.43"
P472B	3/4"	10	100	8	2.20"	1.68"
P473B	1"	5	50	12	2.28"	1.99"
P474B	1-1/4"	5	50	12	2.46"	2.39"
P475B	1-1/2"	5	50	14	2.72"	2.65"
P476B	2"	2	20	9	3.05"	3.22"

FEATURES
- Liquidtight, raintight, oiltight
- For flexible non-metallic liquidtight tubing
- Easy assembly avoids having to remove the compression nut
- Straight type
- Black

APPLICATIONS
- For use in wet and dry locations

STANDARD MATERIAL
- 6/6 Nylon


CERTIFICATIONS
- cULus

90° LIQUIDTIGHT CONNECTORS

GRAY - NYLON



P491



FEATURES
- Liquidtight, raintight, oiltight
- For flexible non-metallic liquidtight tubing
- Easy assembly avoids having to remove the compression nut
- 90° angle
- Gray

APPLICATIONS
- For use in wet and dry locations

STANDARD MATERIAL
- 6/6 Nylon


CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
P490	3/8" 1/2" KO	10	100	9	2.56"	2.14"	1.09"
P491	1/2"	10	100	8	2.56"	2.14"	1.09"
P492	3/4"	10	100	11	2.84"	2.38"	1.30"
P493	1"	5	50	8	2.25"	2.81"	1.50"
P494	1-1/4"	2	20	8	3.96"	3.36"	2.40"
P495	1-1/2"	2	20	10	4.13"	3.45"	2.68"
P496	2"	1	10	9	4.68"	4.04"	3.31"

BLACK - NYLON



P490B



FEATURES
- Liquidtight, raintight, oiltight
- For flexible non-metallic liquidtight tubing
- Easy assembly avoids having to remove the compression nut
- 90° angle
- Black

APPLICATIONS
- For use in wet and dry locations

STANDARD MATERIAL
- 6/6 Nylon

CERTIFICATIONS
- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
P490B	3/8" 1/2" KO	10	100	9	2.56"	2.14"	1.09"
P491B	1/2"	10	100	8	2.56"	2.14"	1.09"
P492B	3/4"	10	100	11	2.84"	2.38"	1.30"
P493B	1"	5	50	8	2.25"	2.81"	1.50"
P494B	1-1/4"	2	20	8	3.96"	3.36"	2.40"
P495B	1-1/2"	2	20	10	4.13"	3.45"	2.68"
P496B	2"	1	10	9	4.68"	4.04"	3.31"

AC WHIPS ULTRA-WHIP - NON METALLIC



55311201

FEATURES
- Liquidtight
- 240 Volt
- Single phase A/C seal proof power whip
- Assembled with all UL components
- Available in 1/2" and 3/4" conduit size
- 4' and 6' lengths, designed for easy installation
- Resists corrosion, oil, water, outdoor, and sunlight damage

APPLICATIONS
- Connection between outside air conditioning unit and electrical power source; typically used to connect compressor to AC disconnect box

STANDARD MATERIAL
- Non-Metallic

CERTIFICATIONS
- UL

PART #	CONDUIT SIZE	WIRE TYPE	WIRES	LENGTH IN FEET	WIRE SIZE	REDUCING WASHER	MASTER QTY.	WEIGHT/ CASE (LBS.)
55311201	1/2"	#10 GAUGE STRANDED THNN	1- BLACK 1- RED 1- GREEN	4	#10	1/2" X 3/4"	12	18
55189407	1/2"	#10 GAUGE STRANDED THNN	1- BLACK 1- RED 1- GREEN	6	#10	1/2" X 3/4"	12	23
55311401	3/4"	#8 GAUGE STRANDED THNN	1- BLACK 1- RED 1- GREEN	4	#8	3/4" X 1"	12	23
55189302	3/4"	#8 GAUGE STRANDED THNN	1- BLACK 1- RED 1- GREEN	6	#8	3/4" X 1"	12	31
64736540	1/2"	#12 SOLID	2- BLACK 1- GREEN	6	#12	1/2" X 3/4"	400	38


All AC Whips include conduit, 1-NM straight and 1-NM 90° fitting and reducing washer. All wire leads are 1 foot lead wire length at each end.

STRAIGHT LIQUIDTIGHT CONNECTORS

ONE PIECE TYPE - PVC



1501



FEATURES
- Liquidtight, raintight, oiltight
- One piece type easily affixes to conduit
- Straight

APPLICATIONS
- For use in wet and dry locations

STANDARD MATERIAL
- PVC

CERTIFICATIONS
- UL


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1501	1/2"	25	100	5	1.75"	.50"	1.25"
1502	3/4"	25	100	8	1.80"	.625"	1.50"

90° LIQUIDTIGHT CONNECTORS

ONE PIECE TYPE - PVC



1522



FEATURES
- Liquidtight, raintight, oiltight
- Recommended design for appliance or fixture installations
- 90° angle

APPLICATIONS
- Dry location use

STANDARD MATERIAL
- PVC

CERTIFICATIONS
- UL

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1521	1/2"	10	100	8	1.875"	.50"	3.125"
1522	3/4"	10	100	11	2.375"	.625"	3.50"

TOP-FLEX 1 TUBING

NON-METALLIC - GRAY



HF112

FEATURES

- Resists corrosion, abrasion, oil, water, acid, metal shavings, and rough environments
- UL Type B flexible nonmetallic liquidtight conduit

APPLICATIONS

- Indoor or outdoor use
- Hazardous Locations - where necessary for flexible connections within hazardous locations per the following:
  - Class 1, Div. 2 - 2005 NEC 501.10(B)(2)
  - Class 2, Div. 1 - 2005 NEC 502.10(A)(2)
  - Class 2, Div. 2 - 2005 NEC 502.10(B)(2)
  - Class 3, Div. 1 - 2005 NEC 503.10(A)(2)
  - Class 3, Div. 2 - 2005 NEC 503.10(B)

STANDARD MATERIAL

- Integral Rigid and flexible PVC construction
- Also available as SIM*pull*™ NMLT for sizes 1/2" to 1-1/4"

c UL us

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	WALL THICKNESS
HF138	3/8"	---	100'	10	.69"	.71"	.484"	.504"	.21"
HF112	1/2"	---	100'	13	.82"	.84"	.622"	.642"	.21"
HF112R	1/2"	REEL	1000'	130	.82"	.84"	.622"	.642"	.21"
HF134	3/4"	---	100'	18	1.03"	1.05"	.82"	.84"	.21"
HF134R	3/4"	REEL	1000'	144	1.03"	1.05"	.82"	.84"	.21"
HF11	1"	---	100'	25	1.29"	1.315"	1.041"	1.066"	.25"
HF11R	1"	REEL	400'	160	1.29"	1.315"	1.041"	1.066"	.25"
HF1114	1-1/4"	---	100'	33	1.63"	1.66"	1.38"	1.41"	.25"
HF1112	1-1/2"	---	50'	23	1.865"	1.90"	1.575"	1.60"	.30"
HF12	2"	---	50'	30	2.34"	2.375"	2.02"	2.045"	.33"

UL TYPE B FLEXIBLE NONMETALLIC LIQUIDTIGHT CONDUIT

- 3/8" through 2" trade sizes
- Use with top-flex nylon connectors straight or right angle
- May also be used with Topaz Die Cast Connectors for liquidtight conduit
- Resists corrosion, abrasion, oil, water, acid, metal shavings, and rough environments
- Resists abuse, pull, and crushing
- Smoothinside for easier wire pulling, no hazardous sharp edges or burrs; will not damage conductors
- For direct burial/poured concrete
- Lightweight and lower installed cost
- Quick installation, cuts with utility knife or PVC cutter (CATALOG #VF28)
- Integral Rigid and flexible PVC construction
- Suitable for indoor/outdoor use:
  - HVAC equipment
  - machine tools
  - motors and controls
  - marine equipment
  - printing equipment
  - pumps refrigeration equipment
- UV rated
- 80° C

TOP-FLEX II TUBING

NON-METALLIC - BLACK



HF214

FEATURES

- Resists corrosion, abrasion, oil, water, acid, metal shavings, and rough environments
- UL Type B flexible nonmetallic liquidtight conduit

APPLICATIONS

- Indoor or outdoor use
- Hazardous Locations- where necessary for flexible connections with hazardous locations per the following:
  - Class 1, Div. 2 - 2005 NEC 501.10(B)(2)
  - Class 2, Div. 1 - 2005 NEC 502.10(A)(2)
  - Class 2, Div. 2 - 2005 NEC 502.10(B)(2)
  - Class 3, Div. 1 - 2005 NEC 503.10(A)(2)
  - Class 3, Div. 2 - 2005 NEC 503.10(B)

STANDARD MATERIAL

- Integral Rigid and flexible PVC construction
- Also available as SIM*pull*™ NMLT for sizes 1/2" to 1-1/4"

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	WALL THICKNESS
HF214	1/4"	100'	4	.56"	.575"	.385"	.405"	.17"
HF238	3/8"	100'	6	.69"	.71"	.484"	.504"	.21"
HF212	1/2"	100'	8	.82"	.84"	.622"	.642"	.21"
HF234	3/4"	100'	10	1.03"	1.05"	.82"	.84"	.21"
HF21	1"	100'	15	1.29"	1.315"	1.041"	1.066"	.25"
HF2114	1-1/4"	100'	19	1.63"	1.66"	1.38"	1.41"	.25"
HF2112	1-1/2"	50'	22	1.865"	1.90"	1.575"	1.60"	.30"
HF22	2"	50'	60	2.34"	2.375"	2.02"	2.045"	.33"

FLEXIBLE LIQUIDTIGHT CONDUIT

METALLIC - COIL



6100UL

c UL us LISTED

FEATURES
- Crush and corrosion resistant steel core for lasting mechanical protection
- Durable PVC jacket is oil, heat and sunlight resistant(UV)
- Smooth interior for easy wire pull through
- 3/8" thru 1-1/4" with continuous bonding strip

APPLICATIONS
- For use in damp or wet locations, suitable for commercial and industrial use
- Listed for direct burial and in poured concrete

STANDARD MATERIAL
- PVC jacketed steel core coil wrapped in clear plastic shrink wrap

CERTIFICATIONS
- cULus

PART #	SIZE	FEET COIL	SHIP CASE	WEIGHT/ CASE (LBS.)	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.	OUTSIDE DIAMETER PVC JACKET MIN.	OUTSIDE DIAMETER PVC JACKET MAX.
6100UL	3/8"	100'	100'	25	.484"	.504"	.594"	.614"	.690"	.710"
6101UL	1/2"	100'	100'	29	.622"	.642"	.732"	.765"	.820"	.840"
6102UL	3/4"	100'	100'	41	.82"	.84"	.930"	.96"	1.03"	1.05"
6103UL	1"	100'	100'	55	1.04"	1.066"	1.201"	1.226"	1.29"	1.315"
6104UL	1-1/4"	50'	50'	33	1.38"	1.41"	1.54"	1.57"	1.63"	1.66"
6105UL	1-1/2"	50'	50'	54	1.575"	1.60"	1.735"	1.77"	1.865"	1.90"
6106UL	2"	50'	50'	32	2.02"	2.045"	2.18"	2.215"	2.34"	2.375"
6107UL	2-1/2"	25'	25'	46	2.48"	2.505"	2.64"	2.675"	2.84"	2.875"
6108UL	3"	25'	25'	56	3.07"	3.10"	3.295"	3.335"	3.46"	3.50"
6109UL	3-1/2"	25'	25'	69	3.50"	3.54"	3.72"	3.789"	3.96"	4"
6110UL	4"	25'	25'	80	4"	4.22"	4.22"	4.28"	4.46"	4.50"

METALLIC - REEL



6100RUL

c UL us LISTED

FEATURES
- Crush and corrosion resistant steel core for lasting mechanical protection
- Durable PVC jacket is oil, heat and sunlight resistant(UV)
- Smooth interior for easy wire pull through
- 3/8" thru 1-1/4" with continuous bonding strip

APPLICATIONS
- For use in damp or wet locations, suitable for commercial and industrial use
- Listed for direct burial and in poured concrete

STANDARD MATERIAL
- PVC jacketed steel core coil on reel

CERTIFICATIONS
- cULus

PART #	SIZE	FEET REEL	SHIP CASE	WEIGHT/ CASE (LBS.)	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.	OUTSIDE DIAMETER PVC JACKET MIN.	OUTSIDE DIAMETER PVC JACKET MAX.
6100RUL	3/8"	600'	600'	272	.484"	.504"	.594"	.614"	.69"	.71"
6101RUL	1/2"	1000'	1000'	312	.622"	.642"	.732"	.765"	.82"	.84"
6102RUL500	1/2"	500'	500'	156	.622"	.642"	.732"	.765"	.82"	.84"
6102RUL	3/4"	500'	500'	229	.82"	.84"	.93"	.96"	1.03"	1.05"
6103RUL	1"	200'	200'	127	1.04"	1.066"	1.201"	1.226"	1.29"	1.315"
6104RUL	1-1/4"	250'	250'	155	1.38"	1.41"	1.54"	1.57"	1.63"	1.66"
6105RUL	1-1/2"	150'	150'	130	1.575"	1.60"	1.735"	1.77"	1.865"	1.90"
6106RUL	2"	100'	100'	154	2.02"	2.045"	2.18"	2.215"	2.34"	2.375"

FLEXIBLE LIQUIDTIGHT CONDUIT

METALLIC - COIL



6101

FEATURES
- Crush and corrosion resistant steel core for lasting mechanical protection
- EF PVC jacket is oil and sunlight resistant
- Smooth interior for easy wire pull through

APPLICATIONS
- For use in damp or wet locations, suitable for commercial and industrial use
- Non UL

STANDARD MATERIAL
- EF PVC jacketed steel core coil wrapped in clear plastic shrink wrap

PART #	SIZE	FEET COIL	MASTER QTY.	WEIGHT/ CASE (LBS.)	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.
6100	3/8"	100'	100'	16	.484"	.504"	.689"	.709"
6101	1/2"	100'	100'	26	.622"	.642"	.819"	.839"
6102	3/4"	100'	100'	31	.815"	.835"	1.032"	1.051"
6103	1"	100'	100'	44	1.032"	1.055"	1.287"	1.315"
6104	1-1/4"	50'	50'	46	1.37"	1.394"	1.63"	1.661"
6105	1-1/2"	50'	50'	35	1.579"	1.598"	1.866"	1.902"
6106	2"	25'	25'	22	2.02"	2.043"	2.339"	2.374"
6106C50	2"	50'	50'	49	2.02"	2.043"	2.339"	2.374"
6107	2-1/2"	25'	25'	42	2.48"	2.504"	2.839"	2.874"
6108	3"	25'	25'	53	3.071"	3.102"	3.461"	3.50"
6109	3-1/2"	25'	25'	55	3.50"	3.54"	3.96"	4"
6110	4"	25'	25'	57	4"	4.039"	4.457"	4.50"

METALLIC - REEL



6101R

FEATURES
- Crush and corrosion resistant steel core for lasting mechanical protection
- EF PVC jacket is oil and sunlight resistant
- Smooth interior for easy wire pull through

APPLICATIONS
- For use in damp or wet locations, suitable for commercial and industrial use
- Non UL

STANDARD MATERIAL
- EF PVC jacketed steel core coil on reel

PART #	SIZE	FEET REEL	MASTER QTY.	WEIGHT/ CASE (LBS.)	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.
6100R	3/8"	1000'	1000'	182	.484"	.504"	.689"	.709"
6101R	1/2"	1000'	1000'	296	.622"	.642"	.819"	.839"
6102R	3/4"	500'	500'	148	.815"	.835"	1.032"	1.051"
6103R	1"	200'	200'	96	1.032"	1.055"	1.287"	1.315"
6104R	1-1/4"	200'	200'	192	1.37"	1.394"	1.63"	1.661"
6105R	1-1/2"	100'	100'	79	1.579"	1.598"	1.866"	1.902"
6105R150	1-1/2"	150'	150'	120	1.579"	1.598"	1.866"	1.902"
6106R	2"	100'	100'	96	2.02"	2.043"	2.339"	2.374"

BX, FLEX AND MC FITTINGS

Southwire's expanding line of BX, Flex and MC fittings include, labor saving Snap in Connectors, Straight and 90° Flex connectors, along with combination couplings and bushings designed for every application.

Snap-In MC Cable Connectors
Snap-In Connectors
Zinc Straight and 90° Squeeze Connectors
Steel Flexible Conduit
Aluminum Flexible Conduit
Top-Bite Saddle Connectors
Combination Couplings
Duplex Saddle Connectors
Anti Short Bushings




SNAP-IN MC CABLE CONNECTORS


SET SCREW TYPE WITH INSULATED THROAT



AMC1



AMC12



FEATURES

- No locknut required
- Single-unit or duplex construction with captive clamp

APPLICATIONS

- Use to join sheathed cable into outlet boxes or enclosures

STANDARD MATERIAL

- Steel

STANDARD FINISH

- Zinc plated

CERTIFICATIONS

- UL Standard: UL 514B
- Fed. Spec: W-F-406E

PART #	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
AMC1	1/2"	50	500	38	1.39"	.844"	.846"
AMC2	3/4"	25	250	48	1.63"	1.88"	.522"
AMC12	1/2"	25	250	14	1.52"	.916"	.868"

PART #	KO SIZE	SIZE	CABLE TYPE	CABLE SIZE	OPENING MAX.	OPENING MIN.	WIRE BUNDLE DIAMETER MIN.	WIRE BUNDLE DIAMETER MAX.
AMC1	1/2"	MC-38S	AC STEEL	14-2 – 10-3	0.565"	0.475"	0.210"	0.330"
			AC STEEL HCF	14-2 – 10-3	0.565"	0.475"	0.220"	0.360"
			AC ALUMINUM	14-2 – 10-3	0.610"	0.464"	0.210"	0.330"
			AC ALUM HCF	14-2 – 10-3	0.610"	0.464"	0.220"	0.360"
			MCI STEEL	14-2 – 10-3	0.565"	0.455"	0.220"	0.360"
			MCI ALUMINUM	14-2 – 10-3	0.600"	0.455"	0.220"	0.360"
			MCI-A	14-2 – 10-3	0.510"	0.385"	0.220"	0.345"
			MCI-A HCF	14-2 – 10-3	0.510"	0.385"	0.240"	0.430"
			MC-PCS STEEL	12/2 - 12/3	0.610"	0.529"	0.360"	0.380"
			MC-PCS ALUMINUM	12/2 - 12/3	0.610"	0.529"	0.360"	0.380"
			FLEX CONDUIT	3/8"	0.610"	0.560"	---	---
AMC2	3/4"	MC-75S	AC STEEL	10-3 – 6-3	0.850"	0.545"	0.330"	0.500"
			AC STEEL HCF	10-3 – 6-3	0.850"	0.545"	0.360"	0.550"
			AC ALUMINUM	10-3 – 6-3	0.835"	0.600"	0.330"	0.500"
			AC ALUM HCF	10-3 – 6-3	0.835"	0.600"	0.360"	0.550"
			MCI STEEL	10-3 – 6-3	0.850"	0.550"	0.360"	0.550"
			MCI ALUMINUM	10-3 – 6-3	0.850"	0.580"	0.360"	0.550"
			MCI-A	8-3 - 6-3	0.785"	0.675"	0.460"	0.570"
			MCI-A HCF	8-3 - 6-3	0.785"	0.675"	0.510"	0.620"
			MC-PCS STEEL	8-3 - 6-3	0.679"	0.529"	0.510"	0.620"
			MC-PCS ALUMINUM	8-3 - 6-3	0.679"	0.529"	0.510"	0.620"
			FLEX CONDUIT	1/2"	0.920"	0.860"	---	---
AMC12*	1/2"	DMC-38S	AC STEEL	14-2 – 10-3	0.565"	0.475"	0.210"	0.330"
			AC STEEL HCF	14-2 – 10-3	0.565"	0.475"	0.220"	0.360"
			AC ALUMINUM	14-2 – 10-3	0.610"	0.464"	0.210"	0.330"
			AC ALUM HCF	14-2 – 10-3	0.610"	0.464"	0.220"	0.360"
			MCI STEEL	14-2 – 10-3	0.565"	0.455"	0.220"	0.360"
			MCI ALUMINUM	14-2 – 10-3	0.600"	0.455"	0.220"	0.360"
			MCI-A	14-2 – 10-3	0.510"	0.385"	0.220"	0.345"
			MCI-A HCF	14-2 – 10-3	0.510"	0.385"	0.240"	0.430"
			MC-PCS STEEL	12/2 - 12/3	0.610"	0.529"	0.360"	0.380"
			MC-PCS ALUMINUM	12/2 - 12/3	0.610"	0.529"	0.360"	0.380"
			FLEX CONDUIT	3/8"	0.610"	0.560"	---	---

*Accepts 2 cables of each size listed.

SNAP-IN CONNECTORS

DOUBLE SNAP LOCK - ZINC



38ASTSW



40ASTSW





FEATURES

- Easy to install
- Labor savings by simply snap the fitting into the knockout hole
- Snap-In design
- No tools are required
- Integrated anti-short bushing
- Not suitable for PVC jacketed/coated cables
- Wide variety of cables

APPLICATION

- Indoor use only
- In a dry location
- Use to connect steel to a steel outlet box or other metal enclosure

STANDARD MATERIAL

- Zinc die cast

CERTIFICATIONS

- cULus



PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	HEIGHT	WIDTH	LENGTH
38ASTSW	3/8"	1/2"	50	500	2.8	1.41"	1"	1"
40ASTSW	3/8"	1/2"	50	500	2.8	1.41"	1"	1"

SNAP-IN DUPLEX CONNECTORS

DOUBLE SNAP LOCK - ZINC







4040ASTSW



3838ASTSW

LISTED

FEATURES

- Easy to install
- Labor savings by simply snap the fitting into the knockout hole
- Snap-In design
- No tools are required
- Integrated anti-short bushing
- Not suitable for PVC jacketed/coated cables
- Wide variety of cables

APPLICATIONS

- Indoor only use
- In a dry location
- Use to connect to a steel junction box or other metal enclosure

STANDARD MATERIAL

- Zinc die cast

CERTIFICATIONS

- cULus


MODEL #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	HEIGHT	WIDTH	LENGTH
3838ASTSW	3/8"	1/2"	25	250	2.83	1.8"	1.6"	1"
4040ASTSW	3/8"	1/2"	25	250	2.83	1.8"	1.6"	1"

BX CONNECTOR

CUT-IN SNAP LOCK



130CSL



FEATURES

- Provides significant labor savings when installing metal clad or armored cable in old work (cut-in) electrical box installations
- No tools are required when assembling to the cable or box
- The anti-short bushing is pre-assembled and will not fall out during transit or installation
- The Cut-in Snap Lock BX connector can easily be removed without tools and is reusable

APPLICATIONS

- Fits 1/2" knockout

STANDARD MATERIAL

- Zinc die cast
- Spring steel
- Polycarbonate bushing

TECHNICAL INFO

- Fits 1/2" knockout
- AL and steel AC 14-2 to 10-3
- AL and steel MC/MCI-A/HCF 14-2 to 10-3
- AL and steel 3/8" RWFMC

CERTIFICATIONS

- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
130CSL	3/8"	50	500	31	1.53"	.98"	1.10"

TAKE ALL CONNECTORS

MC, AC, NM, ROUND SE



TA50



FEATURES

- Indoor dry location use only
- UL listed for MC, AC, NM, and SE round cables
- Reversable steel strap for multiple applications
- Tri-combination screw heads

APPLICATIONS

- Use to connect MC, AC, NM and round SE into box or enclosure

STANDARD MATERIAL

- Zinc body
- Zinc locknut
- Zinc plated steel screws
- Reversible steel strap

CERTIFICATIONS

- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	CABLE DIAMETER A (MIN. – MAX.)
TA50	1/2"	25	250	18	.68" – .85"
TA75	3/4"	20	200	20	.94" – 1.08"
TA100	1"	10	100	14	1.15" – 1.25"
TA125	1-1/4"	10	100	21	1.34" – 1.45"
TA150	1-1/2"	5	50	14	1.70" – 1.845"
TA200	2"	5	50	19	2.07" – 2.18"


TOP-BITE SADDLE TYPE CONNECTORS
WITH INSULATED THROAT




631TBS



634TBS





FEATURES
- Dual gripping saddle clamps
- Saddle clamps ride up and down on screw for ease of installation
- Tri combo head screw

APPLICATIONS
- To connect Flex, AC, and MC cables to a box or enclosure

STANDARD MATERIAL
- 3/8" – 1" steel, 1-1/4" – 4" malleable iron
- Steel locknuts

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus

PART #	SIZE	KO	CABLE RANGE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
630TBS*	3/8"	1/2"	.400" – .660"	25	100	10	1.27"	1.64"
631TBS*	1/2"	1/2"	.520" – .920"	25	100	15	1.27"	1.64"
632TBS*	3/4"	3/4"	.680" - 1.110"	10	50	9	1.46"	1.64"
633TBS*	1"	1"	.880" - 1.375"	5	25	9	1.80"	1.78"
634TBS	1-1/4"	1-1/4"	1.150" - 1.635"	5	25	14	2.24"	1.85"
635TBS	1-1/2"	1-1/2"	1.490" - 1.820"	2	10	8	2.68"	2.40"
636TBS	2"	2"	1.765" - 2.250"	---	5	5	3.25"	2.58"
637TBS	2-1/2"	2-1/2"	2.270" - 2.950"	---	4	6	3.94"	2.93"
638TBS	3"	3"	3.160" - 3.480"	---	5	11	4.53"	3.05"
639TBS	3-1/2"	3-1/2"	3.620" - 4.060"	---	1	3	5.20"	3.82"
640TBS	4"	4"	4.120" - 4.560"	---	1	3	5.91"	4.27"


*UL listed for MCAP/MCI-A & MCI-A HCF cables

TOP-BITE SADDLE TYPE CONNECTORS

90° WITH INSULATED THROAT



490TBS



FEATURES
- With insulated throat
- Male hub threads - NPSM
- One piece malleable construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamps ride up and down on screw for ease of installation
- Tri combo head screw

APPLICATIONS
- To connect Flex, AC, and MC cables to a box or enclosure

STANDARD MATERIAL
- Malleable iron
- Steel locknuts
- Steel clamps

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- cULus

PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	OPENING MIN.	CABLE MAX.	A	B	C
490TBS	3/8"	1/2"	50	300	54	.437"	.656"	1.75"	2.06"	1"
491TBS	1/2"	1/2"	25	150	43	.75"	.937"	2.13"	2.26"	1.25"
492TBS	3/4"	3/4"	20	120	43	.906"	1.13"	2.50"	2.50"	1.38"
493TBS	1"	1"	5	60	34	1.25"	1.47"	2.81"	2.88"	1.69"

45° WITH INSULATED THROAT



230TBS



FEATURES
- With insulated throat
- Male hub threads - NPSM
- One piece malleable construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamps ride up and down on screw for ease of installation
- Tri combo head screw

APPLICATIONS
- To connect Flex, AC, and MC cables to a box or enclosure

STANDARD MATERIAL
- Malleable iron
- Steel locknuts
- Steel clamps

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus


PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	OPENING MIN.	CABLE MAX.	A	B	C
230TBS	3/8"	1/2"	50	300	46	.437"	.656"	1.81"	1.75"	.94"
231TBS	1/2"	1/2"	25	150	39	.75"	.937"	2.13"	2.13"	1.25"
232TBS	3/4"	3/4"	20	120	38	.906"	1.125"	2.38"	2.31"	1.44"

TOP-BITE COMBINATION COUPLINGS

EMT SET SCREW TYPE TO FLEX



420TBS

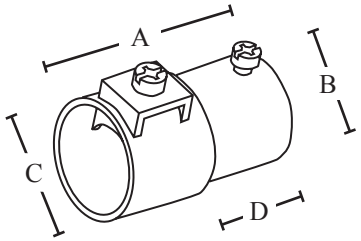

FEATURES
- Set screw type
- One piece tubular construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamps ride up and down on screw for ease of installation
- Tri combo head screw

APPLICATIONS
- To connect Flex, AC, and MC cables to EMT conduit

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- cULus

PART #	EMT SIZE AND FLEX SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
420TBS	3/8"	50	250	21	1.563"	.875"	.75"	.625"
421TBS	1/2"	25	125	17	2"	.875"	1.062"	.625"
422TBS	3/4"	20	100	18	2.125"	1.125"	1.25"	.8125"

EMT COMPRESSION TYPE TO FLEX



430TBS



FEATURES
- Compression type
- One piece tubular construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamps ride up and down on screw for ease of installation
- Tri combo head screw

APPLICATIONS
- To connect Flex, AC, and MC cables to EMT conduit

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus

PART #	EMT SIZE AND FLEX SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	CABLE OPENING MIN.	CABLE OPENING MAX.	A	B
430TBS	3/8"	25	125	17	.28"	.64"	1.375"	1.25"
431TBS	1/2"	25	125	22	.635"	.93"	1.563"	1.25"
432TBS	3/4"	20	100	20	.81"	1.125"	1.563"	1.438"

SNAP-IN SADDLE BITE CONNECTOR

1 SCREW CLAMP TYPE

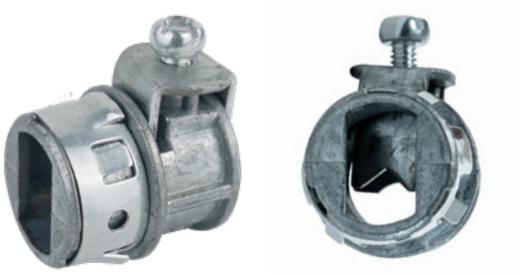

170STSW

FEATURES

- Easy to install
- Labor savings by simply snap the fitting into the knockout hole
- Snap-In design
- Saddle bite type
- Not suitable for PVC jacketed/coated cables
- Wide variety of cables

APPLICATION

- Indoor use only
- In a dry location
- Use to connect steel to a steel outlet box or other metal enclosure

STANDARD MATERIAL

- Zinc die cast
- Zinc plated steel strap

CERTIFICATIONS

- cULus


APPROVED WIRES		
CABLE TYPE	**CONDUIT, SIZE/ CABLE, AWG**	**CABLE DIAMETER A (MIN. – MAX.)**
AC CABLE, ALUMINUM	14/2 – 10/3	.405" – .612"
AC CABLE, STEEL	14/2 – 10/3	.451" – .593"
METAL CLAD CABLE, MCI-A, STEEL	14/2 – 10/3	.451" – .593"
METAL CLAD CABLE, MCI-A, ALUMINUM	14/2 – 10/3	.439" – .58"
FMC, STEEL	3/8"	.56" – .61"
FMC, ALUMINUM	3/8"	.56" – .61"
RWFMC, STEEL	3/8"	.56" – .61"
RWFMC, ALUMINUM	3/8"	.56" – .61"
METAL CLAD CABLE, MCC, ALUMINUM	14/2 – 10/3	.451" – .593"

PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	HEIGHT	WIDTH	LENGTH
170STSW	3/8"	1/2"	50	500	3	1.08"	0.95"	1.19"

MC CABLE CONNECTOR



170TZ



FEATURES
- UL listed for use with MC, AC, FMC, RWFMC, MCI, MCI-A and HCF cables
- Tri-combo screw head

APPLICATIONS
- Dry location use only: Use to connect NM, armored or metal clad cable to box or enclosure
- Use to connect steel or aluminum FMC, AC, MC, HCF cables and aluminum MCC and MCI-A cable to box or enclosure

STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap


CERTIFICATIONS
- cULus

PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
170TZ	3/8"	1/2"	50	500	3	1.19"	0.95"	1.08"

LOW PROFILE SADDLE BITE CONNECTOR



170LP



FEATURES
- Tri-combo screw head
- UL listed for use with MC, AC, FMC, RWFMC, MCI and MCI-A cables

APPLICATIONS
- Dry location use only
- Use to connect steel or aluminum FMC, AC, MC cables and aluminum MCC and MCI-A cable to box or enclosure

STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap


CERTIFICATIONS
- cULus

APPROVED WIRES	
ARMORED CABLE, STEEL	14/2 – 10/4
ARMORED CABLE, ALUMINUM	14/2 – 10/4
METAL CLAD CABLE, MCI, STEEL	14/2 – 10/4
METAL CLAD CABLE, MCI, ALUMINUM	14/2 – 10/4
METAL CLAD CABLE, MCI-A, ALUMINUM	14/2 – 10/4
METAL CLAD CABLE, MCC ALUMINUM	14/2
FMC/RWFMC, STEEL	3/8"
FMC/RWFMC, ALUMINUM	3/8"


PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
170LP	3/8"	1/2"	25	250	28	.935"	.40" – .50"

BX, FLEX, NM AND MC CABLE CONNECTORS

SQUEEZE STRAP TYPE



191



FEATURES
- Squeeze strap type

APPLICATIONS
- Indoor use only
- In a dry location
- Use to connect flexible metallic conduit, AC, and MC cable to a steel outlet box or other metal enclosure


STANDARD MATERIAL
- Zinc
- Zinc plated steel strap

CERTIFICATIONS
- cULus

PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
191	3/8"	1/2"	25	250	25	1.41"	.62" – .78"

BX, FLEX, SNAP-IN CONNECTORS

SET SCREW TYPE - STRAIGHT

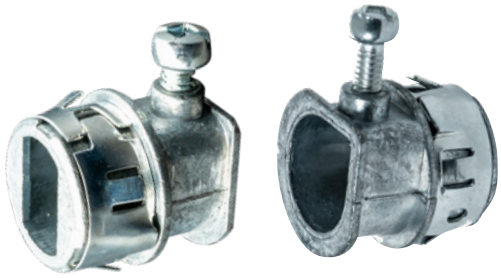

130STSW

FEATURES
- Easy to install
- Labor savings by simply snap the fitting into the knockout hole
- Snap-In design
- Set screw type
- Not suitable for PVC jacketed/coated cables
- Wide variety of cables

APPLICATION
- Indoor use only
- In a dry location
- Use to connect steel to a steel outlet box or other metal enclosure

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

APPROVED CABLES		
CABLE TYPE	CONDUIT, SIZE/ CABLE, AWG	CABLE DIAMETER RANGE (IN)
AC CABLE, ALUMINUM	14/2 – 10/3	.445" – .630"
AC CABLE, STEEL	14/2 – 10/3	.451" – .593"
METAL CLAD CABLE, MCI-A, STEEL	14/2 – 10/3	.451" – .593"
METAL CLAD CABLE, MCI-A, ALUMINUM	14/2 – 10/3	.439" – .58"
FMC, STEEL	3/8"	.56" – .61"
FMC, ALUMINUM	3/8"	.56" – .61"
RWFMC, STEEL	3/8"	.56" – .61"
RWFMC, ALUMINUM	3/8"	.56" – .61"
METAL CLAD CABLE, MCC, ALUMINUM	14/2 – 10/3	.451" – .593"



PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/CASE (LBS.)	HEIGHT	WIDTH	LENGTH
130STSW	3/8"	1/2"	20	200	1	0.94"	0.94"	1.12"

BX, FLEX CONNECTORS


SET SCREW TYPE - STRAIGHT




130TZ



121





c UL us

FEATURES
- Set screw type
- Not suitable for aluminum jacketed cables or aluminum flexible metal conduit

APPLICATIONS
- Indoor use only
- In a dry location
- Use to connect steel to a steel outlet box or other metal enclosure

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C OR RANGE
130TZ	3/8"	1/2"	100	1000	50	.84"	.64"	.38" – .63"
121	1/2"	1/2"	25	250	25	1.38"	1.26"	.38"
121A	3/4"	3/4"	25	250	25	1.54"	1.50"	.406"

SNAP-IN DUPLEX CONNECTOR

1 SCREW CLAMP TYPE





350STSW

c UL us

FEATURES
- Easy to install
- Labor savings by simply snap the fitting into the knockout hole
- Snap-In design
- 1 Screw clamp type
- Not suitable for PVC jacketed/coated cables
- Wide variety of cables

APPLICATION
- Indoor use only
- In a dry location
- Use to connect steel to a steel outlet box or other metal enclosure

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

APPROVED CABLES		
CABLE TYPE	CONDUIT, SIZE/ CABLE, AWG	CABLE DIAMETER RANGE (IN)
AC CABLE, ALUMINUM	14/2 – 10/3	.445" – .610"
AC CABLE, STEEL	14/2 – 10/3	.451" – .593"
METAL CLAD CABLE, MCI-A, STEEL	14/2 – 10/3	.451" – .593"
METAL CLAD CABLE, MCI-A, ALUMINUM	14/2 – 10/3	.439" – .58"
FMC, STEEL	3/8"	.56" – .61"
FMC, ALUMINUM	3/8"	.56" – .61"
RWFMC, STEEL	3/8"	.56" – .61"
RWFMC, ALUMINUM	3/8"	.56" – .61"
METAL CLAD CABLE, MCC, ALUMINUM	14/2 – 10/3	.451" – .593"


PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	HEIGHT	WIDTH	LENGTH
350STSW	3/8"	1/2"	25	250	2.5	0.93"	1.63"	1.65"

COMBINATION CABLE CONNECTORS

2 SCREW CLAMP TYPE



140TZ



FEATURES
- 2 screw clamp type

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit, AC, MC, MCI-A, HCF and NM cable to steel outlet box or other enclosure
- 3/8" size fits 1/2" knockout

STANDARD MATERIAL
- Zinc

CERTIFICATIONS
- cULus

c UL us


PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
140TZ	3/8"	1/2"	100	1000	60	1.192"	.18" – .63"

DUPLEX CONNECTORS

1 SCREW CLAMP TYPE



350



FEATURES
- Fits aluminum smooth extruded MC range .210 – .500
- Indoor use only
- Suitable for: #14-2 through #12-3 wire with ground NM sheathed cable, #14-2 wire steel armored cable, #14-2 wire with ground aluminum armored cable, 3/8" FMC, aluminum smooth sheath metal clad cable 0.410 – 0.500" diameter aluminum interlocked metal clad cable 0.460 – 0.538" diameter, steel interlocked metal clad cable 0.438 – 0.560" diameter
- 3/8" size fits 1/2" knockout

APPLICATIONS
- In a dry location, use to connect two pieces of flexible metallic conduit, AC, MC, or NM sheathed cable, to a steel outlet box or other metal enclosure when using only one knockout opening

STANDARD MATERIAL
- Zinc

CERTIFICATIONS
- cULus

c UL us


PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
350	3/8"	1/2"	25	250	32	1.57"	.13" – .65"

DUPLEX CONNECTORS

90° - FOR BX, FLEX, NM AND MC CABLE



561A



PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
561A	3/8"	1/2"	25	250	37	1.50"	.858"	.38"
561ADC	3/8"	1/2"	25	250	30	2.016"	---	1.087"

FEATURES
- Duplex 2 screw clamp
- UL listed locknut
- NPSM thread
- Tri-combo screw head

APPLICATIONS
- Indoor dry location use only
- For armored cable, flexible metallic conduit, interlocked metal clad, NM and SE cables to a box or enclosure


STANDARD MATERIAL
- 561A - Malleable iron
- 561ADC - Zinc
- Stamped steel cover

CERTIFICATIONS
- cULus

2 SCREW - SADDLE BITE TYPE - FOR BX, FLEX AND MC CABLE



350DS



PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
350DS	3/8"	1/2"	10	100	17	.935"	.40" – .50"

FEATURES
- Provides flexibility of using 2 different size cables in one fitting with separate saddle clamps
- Tri-combo screw head
- UL listed for dry locations

APPLICATIONS
- Dry location only
- Use to connect steel or aluminum FMC, AC, MC cables and aluminum MCC and MCI-A cables to box or enclosure


STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

1 SCREW - SET SCREW TYPE - FOR BX, FLEX



370TZ



PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN.)
370TZ	3/8"	1/2"	25	250	28	1.42"	.63"

FEATURES
- Duplex 2 screw clamp
- UL listed locknut
- Male hub NPT
- Tri-combo screw head
- Fits aluminum smooth extruded MC range .210 – .500

APPLICATIONS
- Indoor dry location use only
- Strap-type fitting used to connect flexible metallic conduit or armored cable to box or enclosure

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- cULus

DUPLEX CONNECTORS

2 SCREW - CLAMP TYPE - FOR BX, FLEX, NM & MC CABLE ZINC DIE CAST



360

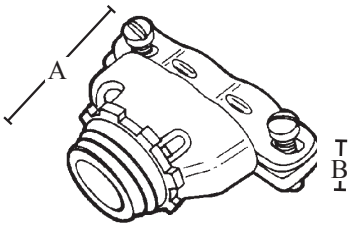

FEATURES
- Duplex 2 screw clamp type
- UL listed locknut
- Male hub NPT
- Tri-combo screw head

APPLICATIONS
- Indoor dry location use only
- Strap-type fitting used to connect flexible metallic conduit or armored cable to box or enclosure

STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap


CERTIFICATIONS
- cULus

PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
360	3/8"	1/2"	25	250	32	1.68"	.24" – .63"

2 SCREW - CLAMP TYPE - FOR BX, FLEX, NM & MC CABLE MALLEABLE IRON



360M



FEATURES
- Duplex 2 screw clamp type
- UL listed locknut
- Male hub NPT
- Tri-combo screw head

APPLICATIONS
- Indoor dry location use only
- Strap-type fitting used to connect flexible metallic conduit or armored cable to box or enclosure

STANDARD MATERIAL
- Malleable iron

CERTIFICATIONS
- cULus


PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
360M	3/8"	1/2"	10	100	16	.83"	2.17"	1.59"

COMBINATION COUPLINGS

SCREW IN TYPE - EMT COMPRESSION TO FLEX - ZINC ZINC DIE CAST



131TZ



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
131TZ	1/2" – 1/2"	50	500	40	1.66"	1"	.723"
132TZ	3/4" – 3/4"	25	250	28	1.68"	1.18"	.931"
133TZ	1" – 1"	25	250	58	1.895"	1.625"	1.07"

FEATURES
- Screw in to compression type
- Combination coupling used to join flexible metallic conduit to EMT

APPLICATIONS
- Indoor use only
- Use to join EMT conduit to flexible metallic conduit
- Suitable for: 1/2" steel, steel reduced wall and aluminum flexible metal conduit to EMT and 3/4" – 1" flexible metallic conduit to EMT


STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

SET SCREW TO CLAMP TYPE - EMT TO FLEX - ZINC DIE CAST



181



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
181	1/2" – 1/2"	25	250	25	1.13"	1.66"	1.58"
182	3/4" – 3/4"	---	100	15	1.34"	1.91"	1.81"
182A	1" – 1"	---	50	13	1.58"	2.19"	2.13"

FEATURES
- Set screw to clamp type
- Tri-combo screw head
- EMT to flex combination coupling

APPLICATIONS
- Indoor use only
- Use to join EMT conduit to flexible metallic conduit


STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap

CERTIFICATIONS
- cULus

SET SCREW TO CLAMP TYPE - EMT TO BX OR NM CABLE ZINC DIE CAST



180



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
180	3/8" – 1/2"	50	500	40	1.35"	.17" – .63"

FEATURES
- Set screw to clamp type
- Combination coupling used to join NM cable to EMT

APPLICATIONS
- Indoor use only
- Use to join EMT to nonmetallic sheathed cable, #14/2, #12/3 or 2 #14/2

STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap


CERTIFICATIONS
- cULus

COMBINATION COUPLINGS

SET SCREW TYPE - EMT TO BX - ZINC DIE CAST



590



c UL us

FEATURES
- Set screw type
- Combination coupling used to join BX cable to EMT

APPLICATIONS
- Indoor use only
- Use to join 1/2" EMT to 3/8" BX cable

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
590	1/2" – 3/8"	25	250	15	1.25"	.93"	.78"

FLEX COUPLINGS

SCREW IN TYPE



461

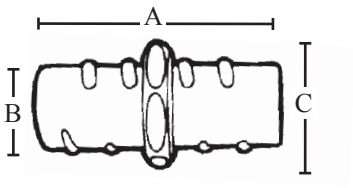

c UL us

FEATURES
- Screw in type coupling

APPLICATIONS
- Indoor use only
- Use to join two pieces of flexible metallic conduit

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
461	1/2"	50	500	30	1.80"	.92"	1.062"
462	3/4"	25	250	23	2.09"	1.12"	1.372"
463	1"	25	250	38	2.41"	1.37"	1.687"
464	1-1/4"	10	100	25	2.74"	1.81"	2.125"
465	1-1/2"	10	40	16	3.05"	2.12"	2.375"
466	2"	10	40	24	3.27"	2.67"	2.937"

BX, FLEX CONNECTORS

STRAIGHT - SQUEEZE TYPE - ZINC DIE CAST




150

FEATURES
- Squeeze type straight
- Available with insulated throat

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit and steel AC cable to a steel outlet box, load center or other metal enclosure
- The 3/8" can also be used with steel and aluminum MC cable
- 3/8" size fits 1/2" knockout
- Suitable for: 3/8" steel flexible conduit, #14/2 metal conduit and #4-2 wire steel armored cable, 3/4" steel flexible metal conduit and #6-3 wire steel armored cable, 1" steel and reduced wall steel flexible metal conduit and #2-2 wire steel armored cable and 1-1/4" – 4" steel flexible metal conduit

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014



PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)	C	SCREWS
150	3/8" 1/2" KO	50	500	35	1"	.58" – .61"	.37"	1
151TZ	1/2"	25	250	25	1.47"	.74" – .95"	.40"	1
152	3/4"	25	250	32	1.58"	.88" – 1.11"	.40"	1
153	1"	10	100	20	1.75"	1.14" – 1.38"	.54"	1
154	1-1/4"	10	100	29	1.91"	1.42" – 1.65"	.64"	1
155	1-1/2"	5	50	20	2.09"	1.68" – 1.94"	.75"	1
156	2"	10	40	21	2.34"	2.08" – 2.56"	.74"	1
157	2-1/2"	---	10	9	2.81"	2.85" – 3.25"	.875"	2
158	3"	---	10	17	3.84"	3.33" – 3.63"	1.03"	2
159	3-1/2"	---	1	3	4.19"	3.75" – 4.10"	1.03"	2
160TZ	4"	---	1	3	4.56"	4.18" – 4.58"	1.03"	2

STRAIGHT - SQUEEZE TYPE WITH INSULATED THROAT ZINC DIE CAST




151I

FEATURES
- Squeeze type straight with insulated throat

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit and steel AC cable to a steel outlet box, load center or other metal enclosure
- Suitable for: 1/2" steel flexible conduit, #14/2 metal conduit and #4-2 wire steel armored cable, 3/4" steel flexible metal conduit and #6-3 wire steel armored cable, 1" steel and reduced wall steel flexible metal conduit and #2-2 wire steel armored cable and 1-1/4" – 4" steel flexible metal conduit

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus



PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)	C	SCREWS
SQZ-38I	3/8"	---	50	25	1.47"	.74" – .95"	.40"	1
151I	1/2"	25	250	25	1.47"	.74" – .95"	.40"	1
152I	3/4"	25	250	32	1.58"	.88" – 1.11"	.40"	1
153I	1"	10	100	20	1.75"	1.14" – 1.38"	.54"	1
154I	1-1/4"	10	100	29	1.91"	1.42" – 1.65"	.64"	1
155I	1-1/2"	5	50	20	2.09"	1.68" – 1.94"	.75"	1
156I	2"	10	40	21	2.34"	2.08" – 2.56"	.74"	1

BX, FLEX CONNECTORS

STRAIGHT - SQUEEZE TYPE - MALLEABLE IRON




FEATURES
- Squeeze type straight

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit and steel AC cable to a steel outlet box, load center or other metal enclosure
- The 3/8" can also be used with steel and aluminum MC cable
- 3/8" size fits 1/2" knockout
- Suitable for: 3/8" steel flexible conduit, #14/2 metal conduit and #4-2 wire steel armored cable, 3/4" steel flexible metal conduit and #6-3 wire steel armored cable, 1" steel and reduced wall steel flexible metal conduit and #2-2 wire steel armored cable and 1-1/4" – 4" steel flexible metal conduit

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated

151M



PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)	C	SCREWS
150M	3/8" 1/2"KO	25	250	30	.93"	.55" – .60"	.50"	1
151M	1/2"	25	250	30	.94"	.78" – .94"	.50"	1
152M	3/4"	25	250	48	1.13"	.91" – 1.08"	.50"	1
153M	1"	10	100	26	1.19"	1.28" – 1.44"	.56"	1
154M	1-1/4"	10	100	39	1.25"	1.44" – 1.63"	.63"	1
155M	1-1/2"	5	50	33	1.88"	1.63" – 1.88"	.69"	1
156M	2"	---	20	21	2"	2.19" – 2.38"	.75"	1
157M	2-1/2"	---	10	14	2.06"	2.70" – 2.95"	.94"	2
158M	3"	---	2	4	2.25"	3.13" – 3.50"	.94"	2
159M	3-1/2"	---	1	5	3.56"	3.72" – 4"	1.25"	2
160M	4"	---	1	7	3.69"	4.06" – 4.44"	1.25"	2

STRAIGHT - SQUEEZE TYPE WITH INSULATED THROAT MALLEABLE IRON




FEATURES
- Squeeze type straight with insulated throat

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit and steel AC cable to a steel outlet box, load center or other metal enclosure
- Suitable for: 1/2" steel flexible conduit, #14/2 metal conduit and #4-2 wire steel armored cable, 3/4" steel flexible metal conduit and #6-3 wire steel armored cable, 1" steel and reduced wall steel flexible metal conduit and #2-2 wire steel armored cable and 1-1/4" – 4" steel flexible metal conduit

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated

151MI



PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)	C	SCREWS
151MI	1/2"	25	250	12	.94"	.78" – .94"	.50"	1
152MI	3/4"	25	250	19	1.13"	.91" – 1.08"	.50"	1
153MI	1"	10	100	26	1.19"	1.28" – 1.44"	.56"	1
154MI	1-1/4"	10	100	39	1.25"	1.44" – 1.63"	.63"	1
155MI	1-1/2"	5	50	66	1.88"	1.63" – 1.88"	.69"	1
156MI	2"	---	20	105	2"	2.19" – 2.38"	.75"	1
157MI	2-1/2"	---	10	150	2.06"	2.70" – 2.95"	.94"	2
158MI	3"	---	2	200	2.25"	3.13" – 3.50"	.94"	2
159MI	3-1/2"	---	1	500	3.56"	3.72" – 4"	1.25"	2
160MI	4"	---	1	700	3.69"	4.06" – 4.44"	1.25"	2

BX, FLEX CONNECTORS

45° - SQUEEZE TYPE - MALLEABLE IRON, STEEL



SQZ-3845I

LISTED

PART #	FLEX SIZE	MASTER QTY.
SQZ-3845I	3/8"	25
SQZ-5045I	1/2"	25
SQZ-7545I	3/4"	25

FEATURES
- Insulated plastic throat

APPLICATIONS
- Use in dry locations to install flexible metal conduits to boxes or enclosures

STANDARD MATERIAL
- Malleable iron, steel

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- UL Listed

45° - SQUEEZE TYPE - ZINC DIE CAST



390

c UL us



PART #	CONDUIT SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
390	3/8"	1/2"	50	500	45	1.588"	1.132"	.382"

FITS MC RANGE
.620-.780

FEATURES
- Squeeze type

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit, AC and steel MC cable to a steel outlet box or other metal enclosure

STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap

CERTIFICATIONS
- cULus

SNAP-IN CONNECTORS

90° - SQUEEZE TYPE - ZINC



100STSW



101STSW

FEATURES

- Easy to install
- Labor savings by simply snap the fitting into the knockout hole
- Snap-In design
- Squeeze type
- Not suitable for PVC jacketed/coated cables
- Wide variety of cables

APPLICATION

- Indoor use only
- In a dry location
- Use to connect steel to a steel outlet box or other metal enclosure

STANDARD MATERIAL

- Zinc die cast

CERTIFICATIONS

- cULus


PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	HEIGHT	WIDTH	LENGTH
100STSW	3/8"	1/2"	25	250	2.3	1.27”	1.35”	1.87”
101STSW	1/2"	1/2"	25	250	3.1	1.55”	1.69”	2.25”

BX, FLEX CONNECTORS

90° - SQUEEZE TYPE - ZINC



100



FEATURES
- Squeeze type

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit, AC and steel MC cable to a steel outlet box or other metal enclosure
- 3/8" size fits 1/2" knockout
- Suitable For: 3/8" – 3/4" steel and aluminum armored cable, steel and aluminum interlocked metal clad cable, flexible cord, and 1" – 4" flexible metallic conduit

STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap


CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014

PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)	C	SCREWS
100	3/8" 1/2" KO	50	500	45	1.74"	.43" – .72"	.37"	2
101	1/2"	25	250	35	2.11"	.64" – 1.03"	.40"	2
102TZ	3/4"	10	100	20	2.40"	.76" – 1.15"	.40"	2
103	1"	5	50	19	2.87"	1.09" – 1.73"	.54"	2
104TZ	1-1/4"	10	40	20	4"	1.34" – 1.97"	.64"	2
105	1-1/2"	---	5	5	6"	1.65" – 2.61"	.75"	2
106	2"	---	5	6	6"	1.54" – 2.54"	.74"	2
107	2-1/2"	---	5	18	7.187"	2.45" – 2.98"	.875"	4
108	3"	---	2	9	7.875"	2.93" – 3.45"	1.031"	4
109	3-1/2"	---	1	9	9.40"	3.28" – 3.95"	1.031"	4
110TZ	4"	---	1	10	10.20"	3.68" – 4.43"	1.031"	4

90° - SQUEEZE TYPE WITH INSULATED THROAT - ZINC



100I



FEATURES
- Squeeze type with insulated throat

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit, AC and steel MC cable to a steel outlet box or other metal enclosure
- 3/8" size fits 1/2" knockout
- Suitable For: 3/8" – 3/4" steel and aluminum armored cable, steel and aluminum interlocked metal clad cable, flexible cord, and 1" – 2" flexible metallic conduit

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)	C	SCREWS
100I	3/8" 1/2" KO	50	500	45	1.74"	.43" – .72"	.37"	2
101I	1/2"	25	250	35	2.11"	.64" – 1.03"	.40"	2
102I	3/4"	10	100	20	2.40"	.76" – 1.15"	.40"	2
103I	1"	5	50	19	2.87"	1.09" – 1.73"	.54"	2
104I	1-1/4"	10	40	20	4"	1.34" – 1.97"	.64"	2
105I	1-1/2"	---	5	5	6"	1.65" – 2.61"	.75"	2
106I	2"	---	5	6	6"	1.54" – 2.54"	.74"	2

BX, FLEX CONNECTORS

90° - SQUEEZE TYPE - MALLEABLE IRON



100M


FEATURES
- Squeeze type

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit, AC and steel MC cable to a steel outlet box or other metal enclosure

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus



PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)	C	SCREWS
100M	3/8" 1/2" KO	25	250	40	1.75"	.78" – .95"	.44"	2
101M	1/2"	25	250	40	1.75"	.78" – .95"	.44"	2
102M	3/4"	10	100	30	1.81"	.91" – 1.02"	.44"	2
103M	1"	5	50	30	2.06"	1.25" – 1.38"	.56"	2
104M	1-1/4"	5	20	38	2.81"	1.41" – 1.63"	.56"	2
105M	1-1/2"	---	5	5	3.81"	1.75" – 2"	.56"	2
106M	2"	---	5	10	4.75"	2.19" – 2.44"	.69"	2
107M	2-1/2"	---	5	16	6.25"	2.75" – 3"	.88"	4
108M	3"	---	2	9	7.25"	3.25" – 3.50"	1"	4
109M	3-1/2"	---	1	14	10.25"	3.70" – 4.16"	1.25"	4
110M	4"	---	1	24	13"	4.11" – 4.56"	1.25"	4

90° - SQUEEZE TYPE WITH INSULATED THROAT - MALLEABLE IRON



101MI


FEATURES
- Squeeze type with insulated throat

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit, AC and steel MC cable to a steel outlet box or other metal enclosure

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus




PART #	CONDUIT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)	C	SCREWS
1ML-110-110MI	3/8"	25	250	16	1.75"	.78" – .95"	.44"	2
101MI	1/2"	25	250	16	1.75"	.78" – .95"	.44"	2
102MI	3/4"	10	100	30	1.81"	.91" – 1.02"	.44"	2
103MI	1"	5	50	60	2.06"	1.25" – 1.38"	.56"	2
104MI	1-1/4"	5	50	76	2.81"	1.41" – 1.63"	.56"	2
105MI	1-1/2"	---	5	100	3.81"	1.75" – 2"	.56"	2
106MI	2"	---	5	200	4.75"	2.19" – 2.44"	.69"	2
107MI	2-1/2"	---	5	320	6.25"	2.75" – 3"	.88"	4
108MI	3"	---	2	450	7.25"	3.25" – 3.50"	1"	4
109MI	3-1/2"	---	1	1400	10.25"	3.70" – 4.16"	1.25"	4
110MI	4"	---	1	2400	13"	4.11" – 4.56"	1.25"	4

BX, FLEX CONNECTORS

SCREW IN TYPE



451



FEATURES
- Screw in type

APPLICATIONS
- Indoor use only
- Use to connect flexible metallic conduit to steel outlet box, load center or other metal enclosure
- 3/8" size fits 1/2" knockout
- 1-1/2"- steel and steel reduced wall flexible metallic conduit

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- cULus

PART #	TRADE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
450	3/8" 1/2" KO	50	500	30	1.31"	.92"
451	1/2"	50	500	30	1.38"	.92"
452TZ	3/4"	25	250	25	1.63"	1.10"
453TZ	1"	25	250	40	1.94"	1.38"
454	1-1/4"	10	100	28	2.12"	1.75"
455	1-1/2"	10	40	15	2.31"	2.13"
456	2"	10	40	25	2.58"	2.67"

SCREW IN TYPE WITH INSULATED THROAT



450I



FEATURES
- Screw in type with insulated throat

APPLICATIONS
- Indoor use only
- Use to connect flexible metallic conduit to steel outlet box, load center or other metal enclosure
- 3/8" size fits 1/2" knockout

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

PART #	TRADE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
450I	3/8" 1/2" KO	50	500	30	1.31"	.92"
451I	1/2"	50	500	30	1.38"	.92"
452I	3/4"	25	250	25	1.63"	1.10"
453I	1"	25	250	40	1.94"	1.38"
454I	1-1/4"	10	100	28	2.12"	1.75"
455I	1-1/2"	10	40	15	2.31"	2.13"
456I	2"	10	40	25	2.58"	2.67"

FLEXIBLE STEEL CONDUIT

COILS



5201

FEATURES
- Corrosion and crush resistant
- Smooth interior for easy wire pull-through
- Easy installation to follow contours

APPLICATIONS
- Voice, data, communications and video cables
- Motor feeder, branch and control circuit conductors and cables
- Elevators, escalators, and hoistways
- Concealed or exposed installations
- Metal raceway for wires and cables

STANDARD MATERIAL
- Galvanized steel

STANDARD FINISH
- Hot dip galvanized zinc coating

COILS

PART #	SIZE	FEET/ COIL	MASTER QTY.	WEIGHT/ CASE (LBS.)	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.
5200	3/8"	100'	100	15	.374"	.376"	.555"	.571"
5250TZ	3/8"	250'	250	37	.374"	.376"	.555"	.571"
5201	1/2"	100'	100	21	.618"	.634"	.85"	.866"
5202	3/4"	100'	100	25	.827"	.846"	1.043"	1.063"
5203	1"	100'	100	45	1.039"	1.059"	1.28"	1.299"
5203C50	1"	50'	50	24	1.039"	1.059"	1.28"	1.299"
5204	1-1/4"	50'	50	24	1.319"	1.343"	1.512"	1.535"
5205	1-1/2"	50'	50	30	1.496"	1.52"	1.827"	1.85"
5205C25	1-1/2"	25'	25	16	1.496"	1.52"	1.827"	1.85"
5206	2"	25'	25	19	2.047"	2.075"	2.335"	2.362"
5207	2-1/2"	25'	25	26	2.52"	2.559"	2.913"	2.953"
5208	3"	25'	25	31	3.071"	3.110"	3.465"	3.504"
5209	3-1/2"	25'	25	34	3.504"	3.551"	3.909"	3.957"
5210	4"	25'	25	34	4.094"	4.154"	4.449"	4.508"

FLEXIBLE STEEL CONDUIT

REELS



5202R

FEATURES
- Corrosion and crush resistant
- Smooth interior for easy wire pull-through
- Easy installation to follow contours

APPLICATIONS
- Voice, data, communications and video cables
- Motor feeder, branch and control circuit conductors and cables
- Elevators, escalators, and hoistways
- Concealed or exposed installations
- Metal raceway for wires and cables

STANDARD MATERIAL
- Galvanized steel

STANDARD FINISH
- Hot dip galvanized zinc coating

REELS

PART #	SIZE	FEET/ REEL	MASTER QTY.	WEIGHT/ CASE (LBS.)	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.
5200R	3/8"	1000'	1000	159	.374"	.376"	.555"	.571"
5201R	1/2"	500'	500	80	.618"	.634"	.85"	.866"
5201RL	1/2"	1000'	1000	160	.618"	.634"	.85"	.866"
5202R	3/4"	300'	300	48	.827"	.846"	1.043"	1.063"
5202R500	3/4"	500'	500	80	.827"	.846"	1.043"	1.063"
5203R	1"	200'	200	99	1.039"	1.059"	1.28"	1.299"
5203R300	1"	300'	300	150	1.039"	1.059"	1.28"	1.299"
5204R	1-1/4"	200'	200	104	1.319"	1.343"	1.512"	1.535"
5204R400	1-1/4"	400'	400	52	1.319"	1.343"	1.512"	1.535"
5205R	1-1/2"	100'	100	63	1.496"	1.52"	1.827"	1.85"
5206R	2"	100'	100	81	2.047"	2.075"	2.335"	2.362"

FLEXIBLE STEEL CONDUIT

UL LISTED COILS



5201UL

FEATURES

- Corrosion resistant and crush resistant
- Smooth interior for easy wire pull through
- Easy to follow contours
- Easy installation to follow contours
- 3/8"–2" available on reels

APPLICATION

- Voice, data, communications and video cables
- Motor feeder, branch and control circuit conductors and cables
- Elevators, escalators, and hoistways
- Concealed or exposed installations
- Metal raceway for wires and cables

STANDARD MATERIAL

- Galvanized steel

STANDARD FINISH

- Hot dip galvanized zinc coating

CERTIFICATIONS

- UL

PART #	SIZE	FEET COIL	MASTER QTY.	WEIGHT/ CASE (LBS.)	THICKNESS	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.
5200C100UL	3/8"	100'	100	23	.64	.393"	.393"	.56"	.61"
5200UL	3/8"	250'	250	59	.64	.393"	.393"	.56"	.61"
5201UL	1/2"	100'	100	29	.64	.625"	.645"	.86"	.92"
5202UL	3/4"	100'	100	37	.64	.812"	.835"	1.045"	1.105"
5203UL	1"	50'	50	31	.76	1"	1.04"	1.30"	1.38"
5204UL	1-1/4"	50'	50	34	.76	1.25"	1.30"	1.55"	1.63"
5205UL	1-1/2"	25'	25	19	.76	1.50"	1.575"	1.85"	1.95"
5206UL	2"	25'	25	22	.76	2"	2.08"	2.35"	2.454"
5207UL	2-1/2"	25'	25	44	1.05	2.50"	2.70"	2.86"	3.06"
5208UL	3"	25'	25	51	1.05	3"	3.20"	3.36"	3.56"
5209UL	3-1/2"	25'	25	61	1.05	3.50"	3.50"	3.86"	4.60"
5210UL	4"	25'	25	72	1.05	4"	4"	4.36"	4.56"

FLEXIBLE STEEL CONDUIT

UL LISTED REELS



5202RUL

FEATURES

- Corrosion resistant and crush resistant
- Smooth interior for easy wire pull through
- Easy to follow contours
- Easy installation to follow contours
- 3/8"–4" available in coils

APPLICATION

- Voice, data, communications and video cables
- Motor feeder, branch and control circuit conductors and cables
- Elevators, escalators, and hoistways
- Concealed or exposed installations
- Metal raceway for wires and cables

STANDARD MATERIAL

- Galvanized steel

STANDARD FINISH

- Hot dip galvanized zinc coating

CERTIFICATIONS

- UL

PART #	SIZE	FEET REEL	MASTER QTY.	WEIGHT/ CASE (LBS.)	THICKNESS	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.
5200RUL	3/8"	1000'	1000	250	.64	.393"	.393"	.56"	.61"
5201RUL	1/2"	1000'	1000	316	.64	.625"	.645"	.86"	.92"
5201R500UL	1/2"	500'	500	164	.64	.625"	.645"	.86"	.92"
5202RUL	3/4"	1000'	1000	397	.64	.812"	.835"	1.045"	1.105"
5202R500UL	3/4"	500'	500	203	.64	.812"	.835"	1.045"	1.105"
5203RUL	1"	400'	400	265	.76	1"	1.04"	1.30"	1.38"
5204RUL	1-1/4"	200'	200	154	.76	1.25"	1.30"	1.55"	1.63"
5205RUL	1-1/2"	150'	150	129	.76	1.50"	1.575"	1.85"	1.95"
5206RUL	2"	100'	100	107	.76	2"	2.08"	2.35"	2.454"

FLEXIBLE ALUMINUM CONDUIT

COILS AND REELS



4300



4301R

FEATURES

- Corrosion and crush resistant
- Lightweight, easy to cut
- Smooth interior for easy wire pull through
- Easy to follow contours

APPLICATIONS

- For use as an electrical raceway in close quarters requiring extra flexibility; one-third the weight of steel
- For use with Southwire UL listed connectors 3-1/2" thru 4" HWA

STANDARD MATERIAL

- Aluminum alloy construction, with tempered alloy for maximum strength

CERTIFICATIONS

- UL

COILS

PART #	SIZE	FEET/ COIL	MASTER QTY.	WEIGHT/ CASE (LBS.)	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.
4300	3/8"	250'	250	14	.374"	.392"	.559"	.609"
4300C100	3/8"	100'	100	6	.374"	.392"	.559"	.609"
4301TZ	1/2"	100'	100	10	.625"	.644"	.859"	.92"
4302TZ	3/4"	100'	100	14	.811"	.835"	1.044"	1.105"
4303TZ	1"	50'	50	11	1"	1.04"	1.30"	1.379"
4304TZ	1-1/4"	50'	50	11	1.25"	1.30"	1.55"	1.629"
4305TZ	1-1/2"	25'	25	12	1.50"	1.573"	1.85"	1.95"
4306TZ	2"	25'	25	12	2"	2.079"	2.35"	2.45"
4307	2-1/2"	25'	25	14	2.50"	2.70"	2.859"	3.059"
4308	3"	25'	25	16	3"	3.20"	3.359"	3.559"
4309TZ	3-1/2"	25'	25	22	3.50"	---	3.859"	4.059"
4310TZ	4"	25'	25	25	4"	---	4.359"	4.559"


REELS

PART #	SIZE	FEET/ REEL	MASTER QTY.	WEIGHT/ CASE (LBS.)	INSIDE DIAMETER MIN.	INSIDE DIAMETER MAX.	OUTSIDE DIAMETER MIN.	OUTSIDE DIAMETER MAX.
4300R	3/8"	1000'	1000	84	.374"	.392"	.559"	.609"
4301R	1/2"	1000'	1000	118	.625"	.644"	.859"	.92"
4302R	3/4"	500'	500	76	.811"	.835"	1.044"	1.105"
4303R	1"	400'	300	74	1"	1.04"	1.30"	1.379"
4304R	1-1/4"	250'	200	64	1.25"	1.30"	1.55"	1.629"
4305R	1-1/2"	150'	100	41	1.50"	1.573"	1.85"	1.95"
4306R	2"	100'	100	55	2"	2.079"	2.35"	2.45"

ANTI SHORT BUSHINGS



TZ0



FEATURES
- Sold in bulk or bags
- With pull tab

APPLICATIONS
- Indoor use only
- Fits cable range: 14/2, 14/3, 12/2
- Insert one bushing at each end of conduit to protect wire

STANDARD MATERIAL
- Polyethylene

CERTIFICATIONS
- UL


PART #	SIZE	FLEX SIZE	PER BAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
TZ0	0	5/16"	35	500 BAGS	15	.68"	.59"
1TZ	1	3/8"	35	400 BAGS	12	.76"	.63"
2TZ	2	7/16"	35	300 BAGS	18	.92"	.68"
3	3	1/2"	20	200 BAGS	16	1.13"	.77"
4	4	3/4"	16	150 BAGS	9	1.34"	.88"
ASB-5	5	1"	16	300 BAGS	12	1.360"-1.460"	.838"-1.038"
ASB-6	6	1-1/4"	10	200 BAGS	14	1.620"-1.720"	1.000"-1.100"
ASB-7	7	1-1/2"	10	200 BAGS	18	2.076"-2.176"	1.000"-1.162"
ASB-8	8	2"	10	100 BAGS	19	2.525"-2.625"	1.230"-1.330"

BX STRAP

ONE HOLE



1106TC



FEATURES
- One hole
- Inverted rib provides extra strength

APPLICATIONS
- Used to secure AC/BX cable to wood, masonry or similar surface

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
510BX	14/2 – 10/3	100	1000	14	1.25"	.48"
1101TC	1/4" MINI	100	1000	13	.625"	.50"
1105TC	1/2"	100	1000	14	.75"	.562"
1106TC	9/16"	100	1000	16	1"	.625"

NM CABLE FITTINGS

Southwire offers a broad range of UL Listed metallic and non-metallic Cable connectors suitable for Romex® Brand and NM cable. Available in Snap-in, compression and traditional strap type enclosures, our fittings accommodate a wide range of cable sizes.

Metallic and Non-metallic Romex® Brand Connectors
SE Round Connectors
Snap-in Romex® Brand Connectors
NM Straps
Combination Couplings
UF Connectors
Zinc Flexible Cord Connectors
Steel Flexible Cord Connectors




NM CLAMP TYPE CONNECTORS

3/8" NM CABLE



120





FEATURES
- Fits NM Cable: #14/2, #12/2, #12/3, AWG or 2 # 14/2 AWG or flex cord .300 to .560 inches diameter 3/8" (1/2" KO)

APPLICATIONS
- For connecting non-metallic cable to box or enclosure

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

PART #	SIZE	FITS CABLE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
120	3/8" 1/2"KO	NM CABLE FROM 2#14-2 WITH GROUND AND 2#12-2 WITH GROUND	100	1000	50	.814"	.44"	.92"


NM ROMEX® BRAND SNAP CONNECTOR

3/8" NM CABLE





120SNP



FEATURES
- Fits NM Cable: #14/2, #12/2, #12/3, AWG or 2 # 14/2 AWG or flex cord .300 to .560 inches diameter 3/8" (1/2" KO)
- Snap-In connection, no lock nut required

APPLICATION
- For connecting non-metallic cable to box or enclosure

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus





PART #	SIZE	FITS CABLE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
120SNP	3/8" 1/2"KO	NM CABLE FROM 2#14-2 WITH GROUND AND 2#12-2 WITH GROUND	50	500	25	.866"	.30"	1.18"

ROMEX™ BRAND NMSC CONNECTOR


NON-WATERTITE - ZINC DIE CAST



RXCN38



L-104



FEATURES
- Two screw

APPLICATIONS
- Connects Romex® Brand NMSC to a box or enclosure

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL Listed, CSA Listed

PART #	SIZE	INNER QTY.	MASTER QTY.	A	B	C
RXCN38	3/8" 1/2"KO	100	1000	.78	.323	.629
L-104	3/4"	50	500	.917	.338	.838

SNAP-IN - PVC



ME-3202

FEATURES
- Max. service temperature 105°C
- Snap-in, No locknut required

APPLICATIONS
- Connects Romex® Brand NMSC to a box or enclosure

STANDARD MATERIAL
- PVC

CERTIFICATIONS
- UL Listed, CSA Listed


PART #	CABLE RANGE	SIZE	INNER QTY.	MASTER QTY
ME-3202	(1) 6/3 TO 8/3, (2) 12/3 TO 8/2	3/4"	25	250

NM CLAMP TYPE CONNECTORS

FOR OVAL NM CABLE



953



FEATURES
- Two tri-combo screws and zinc die cast locknut

APPLICATIONS
- In a dry location, use to connect non-metallic sheathed cable to a steel outlet box or other metal enclosure

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus


PART #	SIZE	FITS CABLE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
952TZ	3/4"	OVAL NM 8-2 TO 6-3	25	250	19	.42"	1.03"
953	1"	OVAL NM 8-3 TO 4-3	25	250	34	.57"	1.20"
954	1-1/4"	OVAL NM 4-3 TO 1-3	10	100	23	.64"	1.32"
955	1-1/2"	OVAL NM 1-3 TO 1/0-3	10	100	31	.60"	1.32"
956	2"	OVAL NM 1/0-3 TO 4/0-3	5	50	25	.71"	1.55"

All above take 2 cables

FOR NM AND SE ROUND CABLE



143R



FEATURES
- Non-watertight
- Two screws


APPLICATIONS
- Indoor use only
- In a dry location, use to connect non-metallic sheathed cable to a steel outlet box or other metal enclosure

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

PART #	SIZE	FITS CABLE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
143R	1"	SE CABLE 6-3, 4-3, 4-2, 2-2 NM CABLE 12-3, 12-4,10-3, 10-4, 8-3, 8-2, 6-2, 4-2	25	250	37	1.19"	.645"
144R	1-1/4"	SE CABLE 10-2, 8-2, 6-2, 4-2 NM CABLE 8-3, 6-3, 4-3, 2-3	10	100	24	1.33"	.66"
145R	1-1/2"	SE CABLES 3-3, 3-2, 3-1	10	100	34	1.47"	.74"
146R	2"	SE CABLES 3-4/0	5	50	23	1.62"	.75"

NM SNAP-IN CONNECTORS




459




458



457
457Y



458



459

c UL us

FEATURES
- 1/2" or 3/4" knockouts

APPLICATIONS
- Multiple knockout sizes accommodate many applications
- Connects NM cable in a dry location

STANDARD MATERIAL
- Plastic

CERTIFICATIONS
- cULus

PART #	KO SIZE	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
457	1/2"	ONE : 14/2 OR 14/3, ONE: 12/2, OR 12/3 ONE: 10/2 OR 10/3	100	1000	5	1"	---
457Y*	1/2"	ONE : 14/2 OR 14/3, ONE: 12/2, OR 12/3 ONE: 10/2 OR 10/3	100	1000	5	1"	---
458	1/2"	2-WIRE TWO : 14/2 OR 12/2 ONE : 14/2 OR 12/2 ONE : 14/2 OR 10/2 ONE : 12/2 OR 10/2	50	500	9	1.25"	.25"
459	3/4"	ONE : 14/3 OR 12/3 ONE : 10/2, 8/3 OR 6/3	50	500	5	1.0938"	.375"

* Yellow

CABLE CONNECTORS


NM SHEATHED



RCR50



RCR75



FEATURES

- RCR50 easily installs in all 1/2" metal knockouts
- RCR75 easily installs in all 3/4" metal knockouts
- Locknut not required
- Retrofit design allows you to install from the inside or outside of enclosure

APPLICATIONS

- Remodel work or new construction
- For use with non-metallic sheathed cable to box or enclosure

STANDARD MATERIAL

- Plastic 105°C rated


PART #	KO SIZE	CABLE RANGE ONE CABLE	CABLE RANGE TWO CABLE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
RCR50	1/2"	14/2, 12/2, 10/2, 14/3, 12/3, 10/3	14/2, 12/2, 14/3	100	1000	4	1"	.50"
RCR75	3/4"	8/3, 6/3	---	50	500	3	1.10"	.75"

NM BOX CONNECTORS

2 PIECE CLAMP BUTTERFLY TYPE



441



FEATURES

- Versatile 2 piece clamp butterfly style design

APPLICATIONS

- For connecting non-metallic cable to box or enclosure

STANDARD MATERIAL

- Steel


PART #	SIZE	FITS CABLE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
441	3/8" TO 1/2"	2 OR 3#14, 12, 10, 8	100	1000	50	1.31"	.64"
442	3/4" TO 1"	2 OR 3#8, 6, 4	50	500	35	1.75"	.765"
444	1-1/4"	#2/0	25	250	25	2.12"	.765"
445	1-1/2"	#3/0, #4/0	25	250	40	2.50"	.78"

COMBINATION CABLE CONNECTORS

2 SCREW CLAMP TYPE



140TZ



FEATURES
- 2 screw clamp type

APPLICATIONS
- Indoor use only
- In a dry location, use to connect flexible metallic conduit, AC, MC, MCI-A, HCF and NM cable to steel outlet box or other enclosure
- 3/8" size fits 1/2" knockout

STANDARD MATERIAL
- Zinc


PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
140TZ	3/8"	1/2"	100	1000	60	1.192"	.18" – .63"


ALL PURPOSE CONNECTORS

TWIN SCREW



NC25





FEATURES
- Securely holds cable in low profile fixtures with 1/4" knockouts
- Concrete tight when taped

APPLICATIONS
- Fore use with non-metallic, AC, MC, sheathed, flexible metal conduit cable both steel and aluminum jacketed
- Mainly used with low silhouette florescent fixtures, additional connectors are needed when multiple fixtures are wired in

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus


PART #	SIZE	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	CABLE RANGE	END STOP DIAMETER	A	B
NC25	3/8"	1/4"	50	500	31	.225-.612	0.38	1.04"	0.92"

NM STRAP

1 HOLE



510RX



FEATURES
- Inverted rib provides extra strength

APPLICATIONS
- Securely affix cables, tubing, pipe and EMT

STANDARD MATERIAL
- Steel


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
510RX	14/2, 12/2	100	1000	14	1.08"	.28"	.50"

COMBINATION COUPLINGS

SET SCREW TO CLAMP TYPE - EMT TO BX OR NM CABLE ZINC DIE CAST



180



FEATURES
- Set screw to clamp type
- Combination coupling used to join NM cable to EMT

APPLICATIONS
- Indoor use only
- Use to join EMT to nonmetallic sheathed cable, #14/2, #12/3 or 2 #14/2

STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap

CERTIFICATIONS
- cULus


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
180	1/2" – 3/8"	50	500	40	1.35"	.17" – .63"

DUPLEX CONNECTORS

2 SCREW - CLAMP TYPE - FOR BX, FLEX, NM & MC CABLE ZINC



360

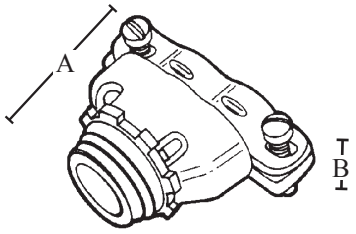

FEATURES
- Duplex 2 screw clamp type
- UL listed locknut
- Male hub NPT
- Tri-combo screw head

APPLICATIONS
- Indoor dry location use only
- Strap-type fitting used to connect flexible metal conduit or armored cable to box or enclosure

STANDARD MATERIAL
- Zinc die cast
- Zinc plated steel strap

CERTIFICATIONS
- cULus


PART #	SIZE	KO SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
360	3/8"	1/2"	25	250	32	1.68"	.24" – .63"

CABLE TYPE	CABLE SIZE	CABLE DIAMETER
ARMORED CABLE, STEEL	14/2 – 10/3	.48" – .58"
ARMORED CABLE, ALUMINUM	14/2 – 10/3	.46" – .50"
MCI-ALUMINUM	14/2 – 10/3	.488" – .81"
MCI-STEEL	14/2 – 10/3	.47" – .60"
MCI-A, ALUMINUM	14/2 – 10/3	.37" – .495"
HCF, MCI A ALUMINUM	12/2 - 10/2	.418" – .495"

2 SCREW - CLAMP TYPE - FOR BX, FLEX, NM & MC CABLE MALLEABLE IRON



360M



FEATURES
- Duplex 2 screw clamp type
- UL listed locknut
- Male hub NPT
- Tri-combo screw head

APPLICATIONS
- Indoor dry location use only
- Strap-type fitting used to connect flexible metal conduit or armored cable to box or enclosure

STANDARD MATERIAL
- Malleable iron

CERTIFICATIONS
- cULus


PART #	SIZE	KO SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
360M	3/8"	1/2"	10	100	16	.83"	2.17"	1.59"

DUPLEX CONNECTORS

1 SCREW CLAMP TYPE - FOR BX, FLEX, NM & MC CABLE



350



PART #	SIZE	KO SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B (MIN. – MAX.)
350	3/8"	1/2"	25	250	32	1.57"	.13" – .65"

FEATURES

- Fits aluminum smooth extruded MC range .210-.500
- Indoor use only
- Suitable for: #14-2 through #12-3 wire with ground NM sheathed cable, #14-2 wire steel armored cable, #14-2 wire with ground aluminum armored cable, 3/8" FMC, aluminum smooth sheath metal clad cable 0.410-0.500" diameter aluminum interlocked metal clad cable 0.460-0.538" diameter, steel interlocked metal clad cable 0.438-0.560" diameter
- 3/8" size fits 1/2" knockout

APPLICATIONS

- In a dry location, use to connect two pieces of flexible metallic conduit, AC, MC, or NM sheathed cable, to a steel outlet box or other metal enclosure when using only one knockout opening

STANDARD MATERIAL

- Zinc

CERTIFICATIONS


- cULus

TAKE ALL CONNECTORS

MC, AC, NM, ROUND SE



TA50



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	CABLE DIAMETER A (MIN. – MAX.)
TA50	1/2"	25	250	18	.68" – .85"
TA75	3/4"	20	200	20	.94" – 1.08"
TA100	1"	10	100	14	1.15" – 1.25"
TA125	1-1/4"	10	100	21	1.34" – 1.45"
TA150	1-1/2"	5	50	14	1.70" – 1.845"
TA200	2"	5	50	19	2.07" – 2.18"

FEATURES

- Indoor dry location use only
- UL listed for MC, AC, NM, and SE round cables
- Reversable steel strap for multiple applications
- Tri-combination screw heads

APPLICATIONS

- Use to connect MC, AC, NM and round SE into box or enclosure

STANDARD MATERIAL

- Zinc body
- Zinc locknut
- Zinc plated steel screws
- Reversible steel strap

CERTIFICATIONS


- cULus

WATERTIGHT CONNECTORS

COMPRESSION TYPE



873



FEATURES
- Compression type
- Rubber grommet

APPLICATIONS
- Use to secure SE/SEU cable to metal enclosures
- For SE/SEU flat style cable; two insulating conductors

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- UL, CSA

PART #	SIZE	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	GROMMET OPENING A B	C
873	1"	3#8	10	100	34	.41" x .65"	1.875"
873A	1"	3#6	10	100	34	.46" x .715"	1.875"
873B	1"	3#4	10	100	34	.53" x .85"	1.875"
874	1-1/4"	3#3	10	100	52	.55" x .91"	1.937"
874A	1-1/4"	3#2	10	100	52	.58" x .96"	1.937"
874B	1-1/4"	3#1	10	100	52	.66" x 1.12"	1.937"
875	1-1/2"	3#1/0	5	50	33	.705" x 1.195"	2.375"
875A	1-1/2"	3#2/0	5	50	32	.74" x 1.235"	2.375"
876	2"	3#1/0	5	50	44	.705" x 1.195"	2.25"
876A	2"	3#2/0	5	50	44	.74" x 1.235"	2.25"
876B	2"	3#3/0	5	50	44	.83" x 1.415"	2.25"
876C	2"	3#4/0	5	50	44	.85" x 1.54"	2.25"
876D	2"	3#4/0	5	50	44	.995" x 1.58"	2.25"

FOR UF CABLE



871



FEATURES
- Compression type
- Rubber grommet

APPLICATIONS
- Use to secure SE/SEU cable to metal enclosures
- Use to connect UF cable to a waterproof box with a threaded hub
- For SE/SEU flat style cable; two insulating conductors

STANDARD MATERIAL
- Steel or zinc die cast

CERTIFICATIONS
- UL


PART #	SIZE	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	GROMMET OPENING A B	C
ZINC							
871	1/2"	2#14	25	250	43	.22" x .44"	1.437"
872TZ	3/4"	3#14	25	250	65	.22" x .44"	1.75"

LIQUIDTIGHT CORD GRIPS

NPT HUBS - 6/6 NYLON



LTF12



FEATURES
- Liquidtight at up to 70 P.S.I. water pressure
- Acme threads on body prevent skipping and speed installation
- Multiple sizes for cable diameters
- Suitable for NEMA type 6 enclosures
- IP68 Rating
- Locknuts sold separately

APPLICATIONS
- Indoor or outdoor use
- Prevents cable pullout and controls arc of bend

STANDARD MATERIAL
- 6/6 nylon

CERTIFICATIONS
- UL


PART #	SIZE	CABLE DIAMETER MIN. MAX.	SUGGESTED CLEARANCE HOLE DIAMETER	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
LTF12	1/2"	.17" – .450"	.875"	25	100	3	1.53"	.93"
LTF34	3/4"	.45" – .709"	1.04"	10	100	5	1.97"	1.30"
LTF1	1"	.59" – 1"	1.326"	10	100	6	2.42"	1.65"

FLEXIBLE CORD CONNECTORS

STRAIN RELIEF - ZINC DIE CAST



882



FEATURES
- Provides excellent strain relief for indoor and outdoor use
- Prevents cable pullout
- Provides tight seal against elemental damage

APPLICATIONS
- Indoor and outdoor use

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL, CSA


PART #	SIZE	GROMMET COLOR	CABLE RANGE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	RANGE MIN.	RANGE MAX.
881	1/2"	RED	.190" – .260"	25	250	43	.96"	1.30"	.19"	.26"
881A	1/2"	BLUE	.260" – .375"	25	250	43	.96"	1.30"	.26"	.375"
881B	1/2"	GREEN	.375" – .500"	25	250	43	.96"	1.30"	.375"	.50"
882	3/4"	GREEN	.375" – .500"	25	250	65	1.20"	1.32"	.44"	.50"
882A	3/4"	BROWN	.500" – .625"	25	250	65	1.20"	1.32"	.50"	.625"
882B	3/4"	ORANGE	.625" – .750"	25	250	65	1.20"	1.32"	.625"	.725"
883A	1"	BROWN	.500" – .625"	10	100	34	1.51"	1.58"	.50"	.625"
883B	1"	ORANGE	.625" – .750"	10	100	34	1.51"	1.58"	.625"	.75"
883C	1"	BLACK	.750" – .880"	10	100	34	1.51"	1.58"	.75"	.88"
883D	1"	PURPLE	.880" – .985"	10	100	34	1.51"	1.58"	.875"	.985"

FLEXIBLE CORD CONNECTORS

STRAIN RELIEF - STEEL



50A250



FEATURES
- Grommets enhance sealing for additional protection
- Provides excellent strain relief
- For indoor and outdoor use
- Prevents cable pullout

APPLICATIONS
- Provides tight seal against elemental damage

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL, CSA

PART #	SIZE	GROMMET COLOR	CABLE RANGE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
50A250	1/2"	RED	.15" – .25"	---	25	3	.975"	1.937"
50A350	1/2"	WHITE	.25" – .35"	---	25	3	.975"	1.937"
50A450	1/2"	BLUE	.35" – .45"	---	25	3	.975"	1.937"
50A560	1/2"	GREEN	.45" – .56"	---	25	3	.975"	1.937"
50A650	1/2"	BROWN	.55" – .65"	---	25	3	.975"	1.937"
75A250	3/4"	RED	.15" – .25"	---	25	3	1.22"	1.937"
75A350	3/4"	WHITE	.25" – .35"	---	25	3	1.22"	1.937"
75A450	3/4"	BLUE	.35" – .45"	---	25	3	1.22"	1.937"
75A560	3/4"	GREEN	.45" – .56"	---	25	3	1.22"	1.937"
75A650	3/4"	BROWN	.55" – .65"	---	25	3	1.22"	1.937"
75B750	3/4"	YELLOW	.65" – .75"	---	25	3	1.22"	1.562"
75B850	3/4"	PURPLE	.75" – .85"	---	25	3	1.22"	1.562"
100B560	1"	GREEN	.45" – .56"	10	100	28	1.50"	1.75"
100B650	1"	BROWN	.55" – .65"	10	100	28	1.50"	1.75"
100B750	1"	YELLOW	.65" – .75"	10	100	28	1.50"	1.75"
100B850	1"	PURPLE	.75" – .85"	10	100	28	1.50"	1.75"
100C950	1"	GRAY	.85" – .95"	10	100	28	1.50"	1.875"
100C1050	1"	BLACK	.95" – 1.05"	10	100	28	1.50"	1.875"

Larger sizes available

See specifications on next page

FLEXIBLE CORD CONNECTORS

STRAIN RELIEF - STEEL

Cable Chart for Flexible Cord Connectors

PART #	SIZE	CABLE RANGE MIN. MAX.	FOR TYPES SO, ST, & STO	FOR TYPES SJ, STO, SJT SJTO, SVO, AND BUS DROP FOR VNTC TYPE TRAY CABLE	FOR VNTC TYPE TRAY CABLE
50A250	1/2"	.15 - .25	---	18-2,3 SVO	---
50A350	1/2"	.25 - .35	---	18-2,3 SJT 18-2,3,4 SJO 16-2,3 SJO	18-3,4 & 5 16-3 & 4 14-3
50A450	1/2"	.35 - .45	18-2,3,4 16-2,3,4	16-4 SJO 14-2,3,4 SJO 12-2 SJO 14-3 BUS DROP	18-6 TO 18-11 16-5 TO 16-8 14-4 TO 14-7 12-3 & 4 ALSO COMPOSITE CABLES 3 # 16 & 4 # 14
50A560	1/2"	.45 - .56	18-5,6,7 16-5,6 14-2,3	12-3 SJO 12-3 & 10-3 BUS DROP	18-10 TO 18-16 16-9 TO 16-12 14-8 TO 14-9 12-5 & 12-7 10-3 TO 10-4 ALSO COMPOSITE CABLES 3 # 12 & 4 # 14 3 # 10 & 4 # 14
50A650	1/2"	.55 - .65	18-8,10 16-7,8 14-4 12-2,3 10-2	---	18-17 TO 18-23 16-13 TO 16-19 14-10 TO 14-14 12-8 & 9 10-5 TO 10-7 8-2 TO 8-4 ALSO COMPOSITE CABLES 3 # 8 & 4 # 14 3 # 10 & 4 # 12
75A250	3/4"	.15 - .25	---	18-2,3 SVO	---
75A350	3/4"	.25 - .35	---	18-2,3 SJT 18-2,3,4 SJO 16-2,3 SJO	18-3,4 & 5 16-3,4 14-3
75A450	3/4"	.35 - .45	18-2,3,4 16-2,3,4	16-4 SJO 14-2,3,4 SJO 12-2 SJO 14-3 BUS DROP	18-6 TO 18-11 16-5 TO 16-8 14-4 TO 14-7 12-3 & 4 ALSO COMPOSITE CABLES 3 # 16 & 4 # 14
75A560	3/4"	.45 - .56	18-5,6,7 16-5,6 14-2,3	12-3 SJO 12-3 & 10-3 BUS DROP	18-10 TO 18-16 16-9 TO 16-12 14-8 TO 14-9 12-5 TO 12-7 10-3 TO 10-4 ALSO COMPOSITE CABLES 3 # 12 & 4 # 14 3 # 10 & 4 # 14
75A650	3/4"	.55 - .65	18-8,10 16-7,8 14-4 12-2,3 10-2	---	18-17 TO 18-23 16-13 TO 16-19 14-10 TO 14-14 12-8 & 9 10-5 TO 10-7 8-2 TO 8-4 ALSO COMPOSITE CABLES 3 # 8 & 4 # 14 3 # 10 & 4 # 12
75B750	3/4"	.65 - .75	18-12,14 16-10,12 14-5,6,7 12-4,5 10-3,4 8-2	8-3 BUS DROP	18-24 TO 18-37 16-20 TO 16-27 14-15 TO 14-21 12-5 TO 12-7 10-3 TO 10-4 ALSO COMPOSITE CABLES 3 # 6 & 4 # 14 3 # 8 & 4 # 12
75B850	3/4"	.75 - .85	18-16,18,20 16-14,16,18 14-8 12-6,7,8 10-5 8-3,4 6-2	6-3 BUS DROP	16-28 TO 16-33 14-22 TO 14-26 12-15 TO 12-19 10-10 TO 10-11 6-4 4-2 ALSO COMPOSITE CABLES 3 # 6 & 4 12 3 # 6 & 6 # 14 3 # 6 & 6 # 12
100B560	1"	.45 - .56	18-5,6,7 16-5,6 14-2,3	12-3 SJO 12-3 & 10-3 BUS DROP	18-10 TO 18-16 16-9 TO 16-12 14-8 TO 14-9 12-5 TO 12-7 10-3 TO 10-4 ALSO COMPOSITE CABLES 3 # 12 & 4 # 14 3 # 10 & 4 # 14
100B650	1"	.55 - .65	18-8,10 16-7, 8 14-4 12-2,3 10-2	---	18-17 TO 18-23 16-13 TO 16-19 14-10 TO 14-14 12-8,9 10-5 TO 10-7 8-2 TO 8-4 ALSO COMPOSITE CABLES 3 # 8 & 4 # 14 3 # 10 & 4 # 12
100B750	1"	.65 - .75	18-2,14 16-10,12 14-5,6,7 12-4,5 10-3,4 8-2	8-3 BUS DROP	18-24 TO 18-37 16-20 TO 16-27 14-15 TO 14-21 12-10 TO 12-14 10-8 TO 10-9 6-3 ALSO COMPOSITE CABLES 3 # 6 & 4 # 14 3 # 8 & 4 # 12
100B850	1"	.75 - .85	18-16,18,20 16-14,16,18 14-8 12-6,7,8 10-5 8-3,4 6-2	6-3 BUS DROP	16-28 TO 16-33 14-22 TO 14-26 12-15 TO 12-19 10-10 TO 10-11 6-4 TO 4-2 ALSO COMPOSITE CABLES 3 # 6 & 4 # 12 3 # 6 & 6 # 14 3 # 6 & 6 # 12
100C950	1"	.85 - .95	18-22,24,26 16-20,22,24 14-10,12 10-6,7,8 6-3,4	4-3 BUS DROP	16-34 TO 16-37 14-27 TO 14-33 12-20 TO 12-23 10-12 4-3 ALSO COMPOSITE CABLES 3 # 4 & 4 # 14 3 # 4 & 4 # 12
100C1050	1"	.95 - 1.05	18-30 16-26 14-14,16 12-10 4-3	---	14-34 TO 14-37 12-24 TO 12-30 4-4 2-2 2-3 ALSO COMPOSITE CABLES 3 # 2 & 4 # 14 3 # 2 & 4 # 12 3 # 2 & 6 # 14

KNOCKOUT BUSHINGS

6/6 NYLON



SB87510

PART #	INSIDE DIAMETER	KO SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)
SB87510	5/8"	1/2"	100	1000	4
SB87511	11/16"	1/2"	100	1000	4
SB109313	13/16"	3/4"	100	1000	6
SB109314	7/8"	3/4"	100	1000	6
SB109315	15/16"	3/4"	100	1000	6
SB137514	7/8"	1"	100	1000	8
SB137516	1"	1"	100	1000	8
SB175022	1-3/8"	1-1/4"	50	500	6
SB200026	1-5/8"	1-1/2"	50	500	7
SB2.531	1-31/32"	2"	10	100	4
SB3.039	2-15/32"	2-1/2"	10	100	4

FEATURES
- Suitable for use with electrical knockouts

APPLICATIONS
- For use in mounting panels up to 1/4" thick, convert raw edged holes to smooth, neat, insulated holes
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope and utility lines
- Locking fingers snap into holes with fingertip pressure; capable of withstanding a push back force of greater than 35 pounds


STANDARD MATERIAL
- 6/6 nylon

UNIVERSAL BUSHINGS

BLACK - 6/6 NYLON



UB875



PART #	MOUNTING HOLE DIAMETER	KO	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	MAX. INSIDE DIAMETER
UB625	.625	---	100	1000	4	.719"	.406"	.437"
UB875	.875	1/2"	100	1000	4	.938"	.453"	.562"
UB1000	1	---	100	1000	5	1.063"	.453"	.75"
UB1093	1.093	3/4"	100	1000	5	1.156"	.453"	.812"

FEATURES
- .125 maximum thickness
- Flexible shutters accommodate a variety of shapes
- Easy snap in installation

APPLICATIONS
- Absorbs vibration to better cushion cables and tubing with limited internal clearance

STANDARD MATERIAL
- 6/6 Nylon

SERVICE ENTRANCE FITTINGS

Southwire Service Entrance products provide easy access for installation of Electrical service or maintenance. Service entrance caps are available in threaded, PVC, clamp on with split insulator and set screw type to protect service entrance cables. Meter hubs, Duct Seal and flashings are also available to secure and protect conduit and ventilation pipes.

Aluminum Service Entrance Caps – Clamp on
Aluminum Service Entrance Caps – Threaded
PVC Service Entrance Caps
Roof Flashings
Meter Hubs
Sill Plates
Duct Seal
Porcelain Wire holders
Utility Pole Brackets
Watertight Compression Connectors



SE/SEU STRAPS

ONE HOLE - ALUMINUM



232A

FEATURES
- One hole
- Wide wire range
- Stamped aluminum

APPLICATIONS
- Use to secure SE & SEU service entrance cable in surface mount applications

STANDARD MATERIAL
- Aluminum

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
232A	3 #3 OR #2	100	1000
282A	3 #1/0 OR #2/0	25	250
284A	3 #3/0 OR #4/0	20	100

TWO HOLE - GALVANIZED STEEL



506

FEATURES
- Inverted rib provides strength to keep cable secure
- Snap-on Rigid strap with two holes

APPLICATIONS
- Use to secure SE & SEU service entrance cable in surface mount applications

STANDARD MATERIAL
- Galvanized steel

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
506	3#8, 6, 4	100	1000
507	3#3, 2	100	1000
508	3#1/0, 2/0	25	250
509	3#3/0, 4/0	25	250

ONE HOLE NM STRAP



510RX

FEATURES
- One hole
- Inverted rib provides strength to keep cable secure

APPLICATIONS
- Use to secure Romex® Brand nonmetallic sheathed cable in surface mount applications

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc plated

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
510RX	14, 12, 10 IN 2 OR 3 CONDUCTOR, WITH OR WITHOUT GROUND. ALSO 14 IN UF	100	1000

SE LOCK OVER CLIPS



135



FEATURES
- Securely attaches cable to fascia board

APPLICATIONS
- Fast and easy installation for service entrance cables


STANDARD MATERIAL
- Aluminum

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
136	4/3	100	1000	10	1.52"	.75"
137	2/3	100	1000	15	1.62"	.75"
138	2/0	50	500	20	1.82"	.89"
139	4/0	50	500	25	2.20"	1"

SERVICE ENTRANCE HOODS



709



FEATURES
- Constructed of crush proof PVC
- Eliminates sharp edges to avoid abrasion

APPLICATIONS
- Required in overhead applications

STANDARD MATERIAL
- PVC

CERTIFICATIONS
- UL

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
709	3#3-1	10	5	.425"	5"	2"
710	3#2/0-4/0	10	6	6"	5.19"	2.50"

RIGID OFFSET REDUCERS



1203

FEATURES
- Reduces conduit size to accommodate an existing knockout
- To offset the raceway

APPLICATIONS
- Add space to move conduit further away from wall

STANDARD MATERIAL
- Aluminum


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1203	2" x 1-1/4"	50	22
1204	2-1/2" x 2"	25	21

SERVICE ENTRANCE CAPS

CLAMP ON TYPE



731



FEATURES
- Provides water resistant cap to protect service entrance cables
- Clamp on style for unthreaded conduit

APPLICATIONS
- Use in an overhead service entrance
- Mounts on top of EMT, Rigid, or IMC conduit
- Serves as a connecting point for the service entrance wires

STANDARD MATERIAL
- Aluminum
- Steel strap


CERTIFICATIONS
- cULus

PART #	SIZE	INSIDE HOLE SIZE	# HOLES	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
731	1/2"	19/64"	4	10	50	9	2.93"	2.62"	2"
732TZ	3/4"	3/8" 13/32"	2 3	10	50	13	3.25"	2.75"	2.37"
733	1"	7/16" 1/2"	2 3	5	25	8	3.50"	3.25"	2.62"
734	1-1/4"	27/64" 5/8"	2 3	5	25	12	4.50"	3.25"	3"
735	1-1/2"	19/32" 7/16" 3/4"	2 1 3	3	15	10	5"	4.75"	3.31"
736	2"	17/32" 3/4" 1"	1 2 3	---	5	5	6.75"	6"	4.62"
737	2-1/2"	7/8" 1" 1-5/16"	3 1 3	---	1	3	10.50'	7.50"	6"
738	3"	7/8" 1" 1-5/16"	3 1 3	---	1	3	11.50"	9"	8"
739	3-1/2"	1-1/8" 1-3/4"	4 3	---	1	5	12"	9"	8"
740	4"	1-1/8" 1-3/4"	4 3	---	1	4	12"	9"	8"

SERVICE ENTRANCE CAPS
THREADED TYPE



741



FEATURES
- Provides water resistant cap to protect service entrance cables
- Threaded style enables easy installation

APPLICATIONS
- Use in an overhead service entrance
- Mounts on top of Rigid, or IMC conduit
- Serves as a connecting point for the service entrance wires

STANDARD MATERIAL
- Aluminum

CERTIFICATIONS
- cULus


PART #	SIZE	INSIDE HOLE SIZE	# HOLES	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
741	1/2"	19/64"	4	5	50	12	2.68"	2.60"	2"
742	3/4"	3/8" 13/32"	2 3	5	50	15	3.80"	2.72"	2.37"
743	1"	7/16" 1/2"	2 3	---	50	15	3.32"	3.11"	2.62"
744	1-1/4"	27/64" 5/8"	2 3	---	20	10	4.46"	3.20"	3"
745	1-1/2"	19/32" 7/16" 3/4"	2 1 3	---	10	7	4.85"	4.34"	3.31"
746	2"	17/32" 3/4" 1"	1 2 3	---	5	4	6.62"	5.44"	4.62"
747	2-1/2"	7/8" 1" 1-5/16"	3 1 3	---	2	8	9.74"	7.80"	6"
748	3"	7/8" 1" 1-5/16"	3 1 3	---	1	6	10.50"	8"	8"
749TZ	3-1/2"	1-1/8" 1-3/4"	4 3	---	1	6	13.02"	9.39"	8"
750	4"	1-1/8" 1-3/4"	2 4	---	1	7	13.14"	8.54"	8"
750A	5"	1-1/8" 1-3/4"	2 4	---	1	12	11.28"	8.77"	8.25"
750B	6"	1-1/8" 1-3/4"	2 4	---	1	14	12.25"	9.76"	8.25"

SERVICE ENTRANCE CAPS

PVC



727



FEATURES
- Heavy duty construction
- Snap on cover

APPLICATIONS
- Use as a connecting point in an overhead service entrance for SEU cable
- Fits 2/3, 3#2/0 and #4/0 cables


STANDARD MATERIAL
- PVC

PART #	FITS CABLE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
727	2/3	30	8	2.75	2.75	1.87
729	3#2/0, #4/0	10	11	4.25	4.25	3

CLAMP ON WITH SPLIT INSULATOR



707



FEATURES
- Provides water resistant cap when mounted on conduit
- Eliminates sharp edges to protect wire

APPLICATIONS
- Required in overhead applications
- Fits 3#8 to 3#1 and #1/0 to 4/0 cables


STANDARD MATERIAL
- Zinc die cast
- Steel strap

PART #	FITS CABLE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
707	3#8 TO 3#1	20	8	2.37"	2.25"	2.25"
708	1/0 TO 4/0	10	11	4.93"	3.12"	3.75"

SET SCREW TYPE



704TZ



FEATURES
- Eliminates sharp edges to protect wire
- Extended hood

APPLICATIONS
- Required in overhead applications
- For 2" to 2-1/2" pipe sizes

STANDARD MATERIAL
- Aluminum

CERTIFICATIONS
- UL

PART #	PIPE SIZE	HEAD SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
704TZ	2"	1-1/4"	10	10	4.75"	4"	3.12"
705TZ	2-1/2"	1-1/4"	10	20	5.25"	4"	3"
706TZ	2-1/2"	2"	10	20	7"	5.50"	4.50"

ROOF FLASHINGS


GALVANIZED WITH NEOPRENE SEAL



984TZ



984TZ



FEATURES
- Strong galvanized steel with neoprene seal
- Flexible collar

APPLICATIONS
- Watertight protection for service entrance conduit or ventilation pipes
- Directs water flow away from riser pipe entry point

STANDARD MATERIAL
- Galvanized steel
- Neoprene seal


CERTIFICATIONS
- UL

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
984TZ	1-1/4"	25	18	12.50"	8.75"
985TZ	1-1/2"	25	24	12.50"	8.375"
986TZ	2"	25	24	14.50"	10.75"
987	2-1/2"	25	25	14.50"	10.75"

NEOPRENE



994TZ



FEATURES
- Repels weather related damage from snow, ice and rain
- No caulking required
- Durable neoprene construction

APPLICATIONS
- Watertight protection for service entrance conduit or ventilation pipes
- Directs water flow away from riser pipe entry point

STANDARD MATERIAL
- Neoprene

CERTIFICATIONS
- UL

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
994TZ	1-1/4" - 1-1/2"	12	5	12.50"	8.75"
995TZ	2"	12	5	12.50"	8.375"
996	2-1/2"	12	5	14.50"	10.75"
997	3"	12	6	14.50"	10.75"

NO-CAULK



P-339

FEATURES
- Flashing base and collar are separate
- Fits flat surface up to 45 deg pitch
- For plastic, cast iron, or galvanized pipe

APPLICATIONS
- Prevents water leaks where conduit enters roof surface


STANDARD MATERIAL
- 24 gauge galvanized steel base, elastomeric compound collar

PART #	SIZE	MASTER QTY.
P-339	1-1/4" TO 1-1/2"	12
P-340	2"	12
P-342	3"	12
P-344	4"	12

METER HUBS



9663



FEATURES
- Includes hardware
- Corrosion resistant construction withstands inclement weather
- Mounting hole space is 2.5" on center

APPLICATIONS
- Attach to meter boxes or enclosures to provide threaded opening for conductors

STANDARD MATERIAL
- Zinc die cast


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
9663	1"	10	3	3.25"	3.25"
9674	1-1/4"	10	2	3.25"	3.25"
9685	1-1/2"	10	2	3.25"	3.25"
9696	2"	10	2	3.25"	3.25"
9707	2-1/2"	10	2	3.25"	3.25"

SILL PLATES

ZINC DIE CAST



591TZ



FEATURES
- Used in conjuction with sealing compound to offer maximum protection
- Domed top offers maximum protection
- Supplied with mounting screws

APPLICATIONS
- Protects wires and aluminum entry holes
- Sizes for EMT and SEU

STANDARD MATERIAL
- Zinc die cast

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
591TZ	1/2" EMT & 3/4" EMT	10	100	10	2.37"	1"	2.61"
593	1" EMT & 3/3 SEU	10	100	40	2.50"	1.25"	3"
594	1-1/4" EMT & 2/3 SEU	---	25	15	2.61"	1.56"	3.76"
595	1-1/2" EMT	---	25	11	3.580"	1.738"	3.568"
596	4/0 SEU	---	20	17	5.81"	1.88"	3.48"
596A	2" EMT	---	25	16	4.20"	2.29"	4.76"

PVC (1900) AND ALUMINUM (ME14)



1900

FEATURES
- Corrosion resistant

APPLICATIONS
- Prevents water from entering structure when used with sealing compound (Southwire parts 1901 or 1905)

STANDARD MATERIAL
- PVC (1900) and Aluminum (ME14)

PART #	CABLE RANGE	INNER QTY.	MASTER QTY.
1900	#4 – 0	10	100
ME14	#3/0 – 4/0	---	5

DUCT-SEAL WEATHERPROOF COMPOUND

GRAY, ASBESTOS FREE



961

FEATURES
- Permanently soft
- Non-corrosive to metals or plastics; will not harm skin
- Adheres to clean surfaces

APPLICATIONS
- Forms water and air tight seals around junction boxes
- Deadens switch gear panel noise

STANDARD MATERIAL
- Non toxic compound; asbestos free


CERTIFICATIONS
- UL

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
961	1 LB.	50	50
965TZ	5 LB.	10	50

SERVICE ENTRANCE ELLS-SLB



211TZ



FEATURES
- Provides easy access for service
- Includes cover and gasket

APPLICATIONS
- Enables effortless wire pulling when raceway alters direction

STANDARD MATERIAL
- Die cast copper free aluminum


CERTIFICATIONS
- UL

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
211TZ	1/2"	10	50	13	3.155"	1.187"	1.375"
212	3/4"	10	50	16	3.47"	1.36"	1.625"
213TZ	1"	5	25	12	4.18"	1.72"	1.9375"
214	1-1/4"	2	10	8	5.515"	2.178"	2.4375"
214XL	1-1/4" LONG	---	2	3	6.095"	2.41"	2.6875"
215	1-1/2"	1	5	6	6.595"	2.846"	3.0625"
216	2"	1	5	10	7.91"	2.75"	2.75"
216XL	2" LONG	---	1	3	7.74"	3.88"	3.375"

KENNY CLAMPS



1750



c UL us

FEATURES
- Use as a grounding and bonding connector
- 1/2" knockout

APPLICATIONS
- Bonds a grounding electrode conductor to metallic conduit panel boards or transformer enclosures

STANDARD MATERIAL
- Brass

CERTIFICATIONS
- UL


PART #	SIZE	KO SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1750	3/0 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1751	2/0 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1752	1/0 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1753	2 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1754	4 SOLID	1/2"	10	100	35	1.75"	1.0625"
1755	4 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1756	6 SOLID	1/2"	10	100	35	1.75"	1.0625"
1757	6 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1758	8 SOLID	1/2"	10	100	35	1.75"	1.0625"
1759	8 STRANDED	1/2"	10	100	35	1.75"	1.0625"

WIREHOLDERS

ADJUSTABLE



999



FEATURES
- Corrosion resistant and electro-galvanized finish ensure a long product life in all climates
- The unique design allows for safe and secure installation of power drop cables on the outside of buildings

APPLICATIONS
- Protects sheathing and ensures performance

STANDARD MATERIAL
- Porcelain/steel


STANDARD FINISH
- Steel parts are electro-galvanized

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C
999	1-1/4" - 3"	20	34	7.62"	5.60"	1" X .875"

LIGHT DUTY WITH LAG SCREW



1001TZ



FEATURES
- Light duty
- Includes lag screw
- Single-point wireholders are strong and compact
- Heavy cup-base and strap is a single steel stamping, to which the screw is rigidly assembled

APPLICATIONS
- Secure wires before entry into a mast or SE cap

STANDARD MATERIAL
- Porcelain/steel


PART #	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
1001TZ	1-11/16"	100	25	3.0625"	1.375"	.5" X .375"	1.687"

WIREHOLDERS

MEDIUM DUTY WITH LAG SCREW



1002



FEATURES
- Medium duty
- Includes lag screw
- Single-point wireholders are strong and compact
- Heavy cup-base and strap is a single steel stamping, to which the screw is rigidly assembled

APPLICATIONS
- Secure wires before entry into a mast or SE cap


STANDARD MATERIAL
- Porcelain/steel

PART #	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
1002	2-1/4"	50	32	5.25"	1.968"	.5" X .375"	2.25"

SERVICE INSULATOR WIRE HOLDERS



P-19



FEATURES
- Secures incoming wires for overhead service entrance cable


STANDARD MATERIAL
- Porcelain

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
P-16	3/8" x 2-1/4"	50	.626	5.41"	1.875"	3/8"	2.25"
P-19	3/8" x 3"	50	.76	6.15"			3"
P-20	3/8" x 4"	25	.626	7.15"			4"

HEAVY DUTY WITH LAG SCREW



1003



FEATURES
- Heavy duty
- Includes lag screw
- Single-point wireholders are strong and compact
- Heavy cup-base and strap is a single steel stamping, to which the screw is rigidly assembled

APPLICATIONS
- Secure wires before entry into a mast
- or SE cap

STANDARD MATERIAL
- Porcelain/steel reinforced

PART #	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
1003	2-1/4"	50	34	6.1563"	1.875"	1" x .875"	2.25"


WIREHOLDERS

HEAVY DUTY





1004



1008


FEATURES
- Heavy duty for optimal performance
- Protects sheathing
- Bolt or hanger assembly

APPLICATIONS
- Secure wires before their entry into a mast or SE cap


STANDARD MATERIAL
- Porcelain/steel

PART #	BOLT SIZE	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
1004	3/8" x 5"	---	25	22	8.156"	1.875"	1" x .875"	5"
1008	HANGER	2"	25	31	6.416"	1.875"	1" x .875"	3.375"

WEDGE GRIP CLAMPS



1005



FEATURES
- Solid 6-1/2" stainless steel bail
- High quality aluminum for durability

APPLICATIONS
- Supports power cables and other conductors when attached to buildings or utility poles


STANDARD MATERIAL
- Steel reinforced aluminum conductor

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C
1005TZ	6 ACSR – 2 ACSR	50	8	3"	6.07"	5.45"
1006	4 ACSR – 1/0 ACSR	25	7	3.75"	7.26"	5.45"
1007	2/0 ACSR – 4/0 ACSR	25	8	3.75"	7.28"	5.45"

UNIVERSAL PIPE SUPPORT



998



FEATURES
- 10" bolt
- High strength construction

APPLICATIONS
- Secure pipe sizes 1-1/4" to 3"

STANDARD MATERIAL
- Steel

PART #	BOLT SIZE	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
998	1-1/4" – 3"	1/2"	20	18	4.125"	9.75"	1.25"

UTILITY SERVICE DROP, FORK BOLT BRACKETS

STEEL



FB

FEATURES
- 10" bolt
- High strength construction

APPLICATIONS
- Use to provide attachment points for miscellaneous drop wire clamps on buildings with deep walls

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Hot dipped galvanized

PART #	BOLT LENGTH	DESCRIPTION	MASTER QTY.
FB	12"	FOR K BOLT BRACKETS FOR POWER LINE SUPPORT	10

UTILITY SERVICE DROP, MOUNTING PLATE

STEEL



SDP

FEATURES
- .59" diameter mounting hole and slot opening

APPLICATIONS
- Bolts to exterior of building structure providing attachment point for drop wire clamps

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Hot dipped galvanized

PART #	DESCRIPTION	MASTER QTY.
SDP	SERVICE DROP MOUNTING PLATE	10

UTILITY POLE CONDUIT SUPPORT STAND-OFF BRACKET

STEEL



SOB-1

FEATURES
- 60" diameter pole mounting holes
- Clamping action stabilizes conduit on utility pole

APPLICATIONS
- Secures 2" to 6" conduit vertically to utility pole

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Hot dipped galvanized


PART #	DESCRIPTION	MASTER QTY.
SOB-1	UTILITY POLE CONDUIT SUPPORT	10

WATERTIGHT CONNECTORS

FOR UF CABLE



871



FEATURES
- Compression type
- Rubber grommet

APPLICATIONS
- Use to secure SE/SEU cable to a metal enclosure
- Use to connect UF cable to a waterproof box with a threaded hub
- For SE/SEU flat style cable; two insulating conductors

STANDARD MATERIAL
- Steel or zinc


CERTIFICATIONS
- UL

PART #	SIZE	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	GROMMET OPENING A B	C
ZINC							
871	1/2"	2#14	25	250	43	.22" x .44"	1.437"
872TZ	3/4"	3#14	25	250	65	.22" x .44"	1.75"
STEEL							
871S							
872S	3/4" STEEL	3#14	25	250	45	.22" x .44"	1.75"

COMPRESSION TYPE



873



FEATURES
- Compression type
- Rubber grommet

APPLICATIONS
- Use to secure SE/SEU cable to a metal enclosure
- For SE/SEU flat style cable; two insulating conductors


STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL, CSA


PART #	SIZE	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	GROMMET OPENING A	GROMMET OPENING B	C
873	1"	3#8	10	100	34	0.400"	0.630"	1.56"
873A	1"	3#6	10	100	34	0.440"	0.700"	1.56"
873B	1"	3#4	10	100	34	0.500"	0.800"	1.56"
874	1-1/4"	3#3	10	100	52	0.510"	0.850"	1.99"
874A	1-1/4"	3#2	10	100	52	0.570"	0.940"	1.99"
874B	1-1/4"	3#1	10	100	52	0.660"	1.120"	1.99"
875	1-1/2"	3#1/0	5	50	33	0.705"	1.195"	2.18"
875A	1-1/2"	3#2/0	5	50	32	0.740"	1.240"	2.18"
876	2"	3#1/0	5	50	44	0.705"	1.195"	2.41"
876A	2"	3#2/0	5	50	44	0.740"	1.240"	2.41"
876B	2"	3#3/0	5	50	44	0.830"	1.415"	2.41"
876C	2"	3#4/0	5	50	44	0.890"	1.540"	2.41"
876D	2"	3#4/0	5	50	44	0.990"	1.580"	2.41"

CONDUIT SUPPORTS

ALUMINUM LAG SCREW TYPE



1000



FEATURES
- Accommodates conduit sizes of 2" or 2-1/2"
- Includes lag screw

APPLICATIONS
- Affixes conduit to a structure or line pole


STANDARD MATERIAL
- Aluminum

PART #	CONDUIT SIZE	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1000	2"	2.375	25	15	2.875"	.875"
1000A	2-1/2"	2.75	25	26	3.30"	.875"

MALLEABLE IRON LAG SCREW TYPE



1106



FEATURES
- Accommodates conduit sizes of 2" or 2-1/2"
- Includes lag screw

APPLICATIONS
- Affixes conduit to a structure or line pole


STANDARD MATERIAL
- Malleable iron

PART #	CONDUIT SIZE	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1106	2"	2.375	25	32	2.70"	.985"
1107	2-1/2"	2.375	35	87	3.295"	1.08"

SPLIT RING



1097A



FEATURES
- Accommodates conduit sizes of 2" or 4"
- Includes lag screw

APPLICATIONS
- Affixes conduit to a structure or line pole

STANDARD MATERIAL
- Malleable iron

PART #	CONDUIT SIZE	BOLT SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1097A	2"	1/2" – 10"	25	12	2.70"	.985"
1097	2-1/2"	1/2" – 10"	25	13	3.33"	1.071"
1098	3"	5/8" – 13"	10	25	4.50"	1.04"
1099	3-1/2"	5/8" – 13"	10	27	5.125"	1.075"
1100	4"	5/8" – 13"	10	28	5.593"	1.075"

SERVICE ENTRANCE MAST KITS

FEATURES

- Accommodates multiple specifications
- Kits eliminate need to purchase and stock additional components


APPLICATIONS

- Provides an assortment of SE mast components for the installation of overhead service drops

2" KIT



736



986TZ



1008



1106

PART #	PIPE SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1966	2"	1	4
CONSISTS OF 736, 986TZ, 1008, 1106			

2-1/2" KIT



737



987



999




1107

PART #	PIPE SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1977TZ	2-1/2"	1	4
CONSISTS OF 737, 987, 999, (2)1107			

CONDUIT BODIES

Southwire Service Entrance products provide easy access for installation of Electrical service or maintenance. Service entrance caps are available in threaded, PVC, clamp on with split insulator and set screw type to protect service entrance cables. Meter hubs, Duct Seal and flashings are also available to secure and protect conduit and ventilation pipes.

Aluminum Service Entrance Caps – Clamp on
Aluminum Service Entrance Caps – Threaded
PVC Service Entrance Caps
Roof Flashings
Meter Hubs
Sill Plates
Duct Seal
Porcelain Wire holders
Utility Pole Brackets
Watertight Compression Connectors

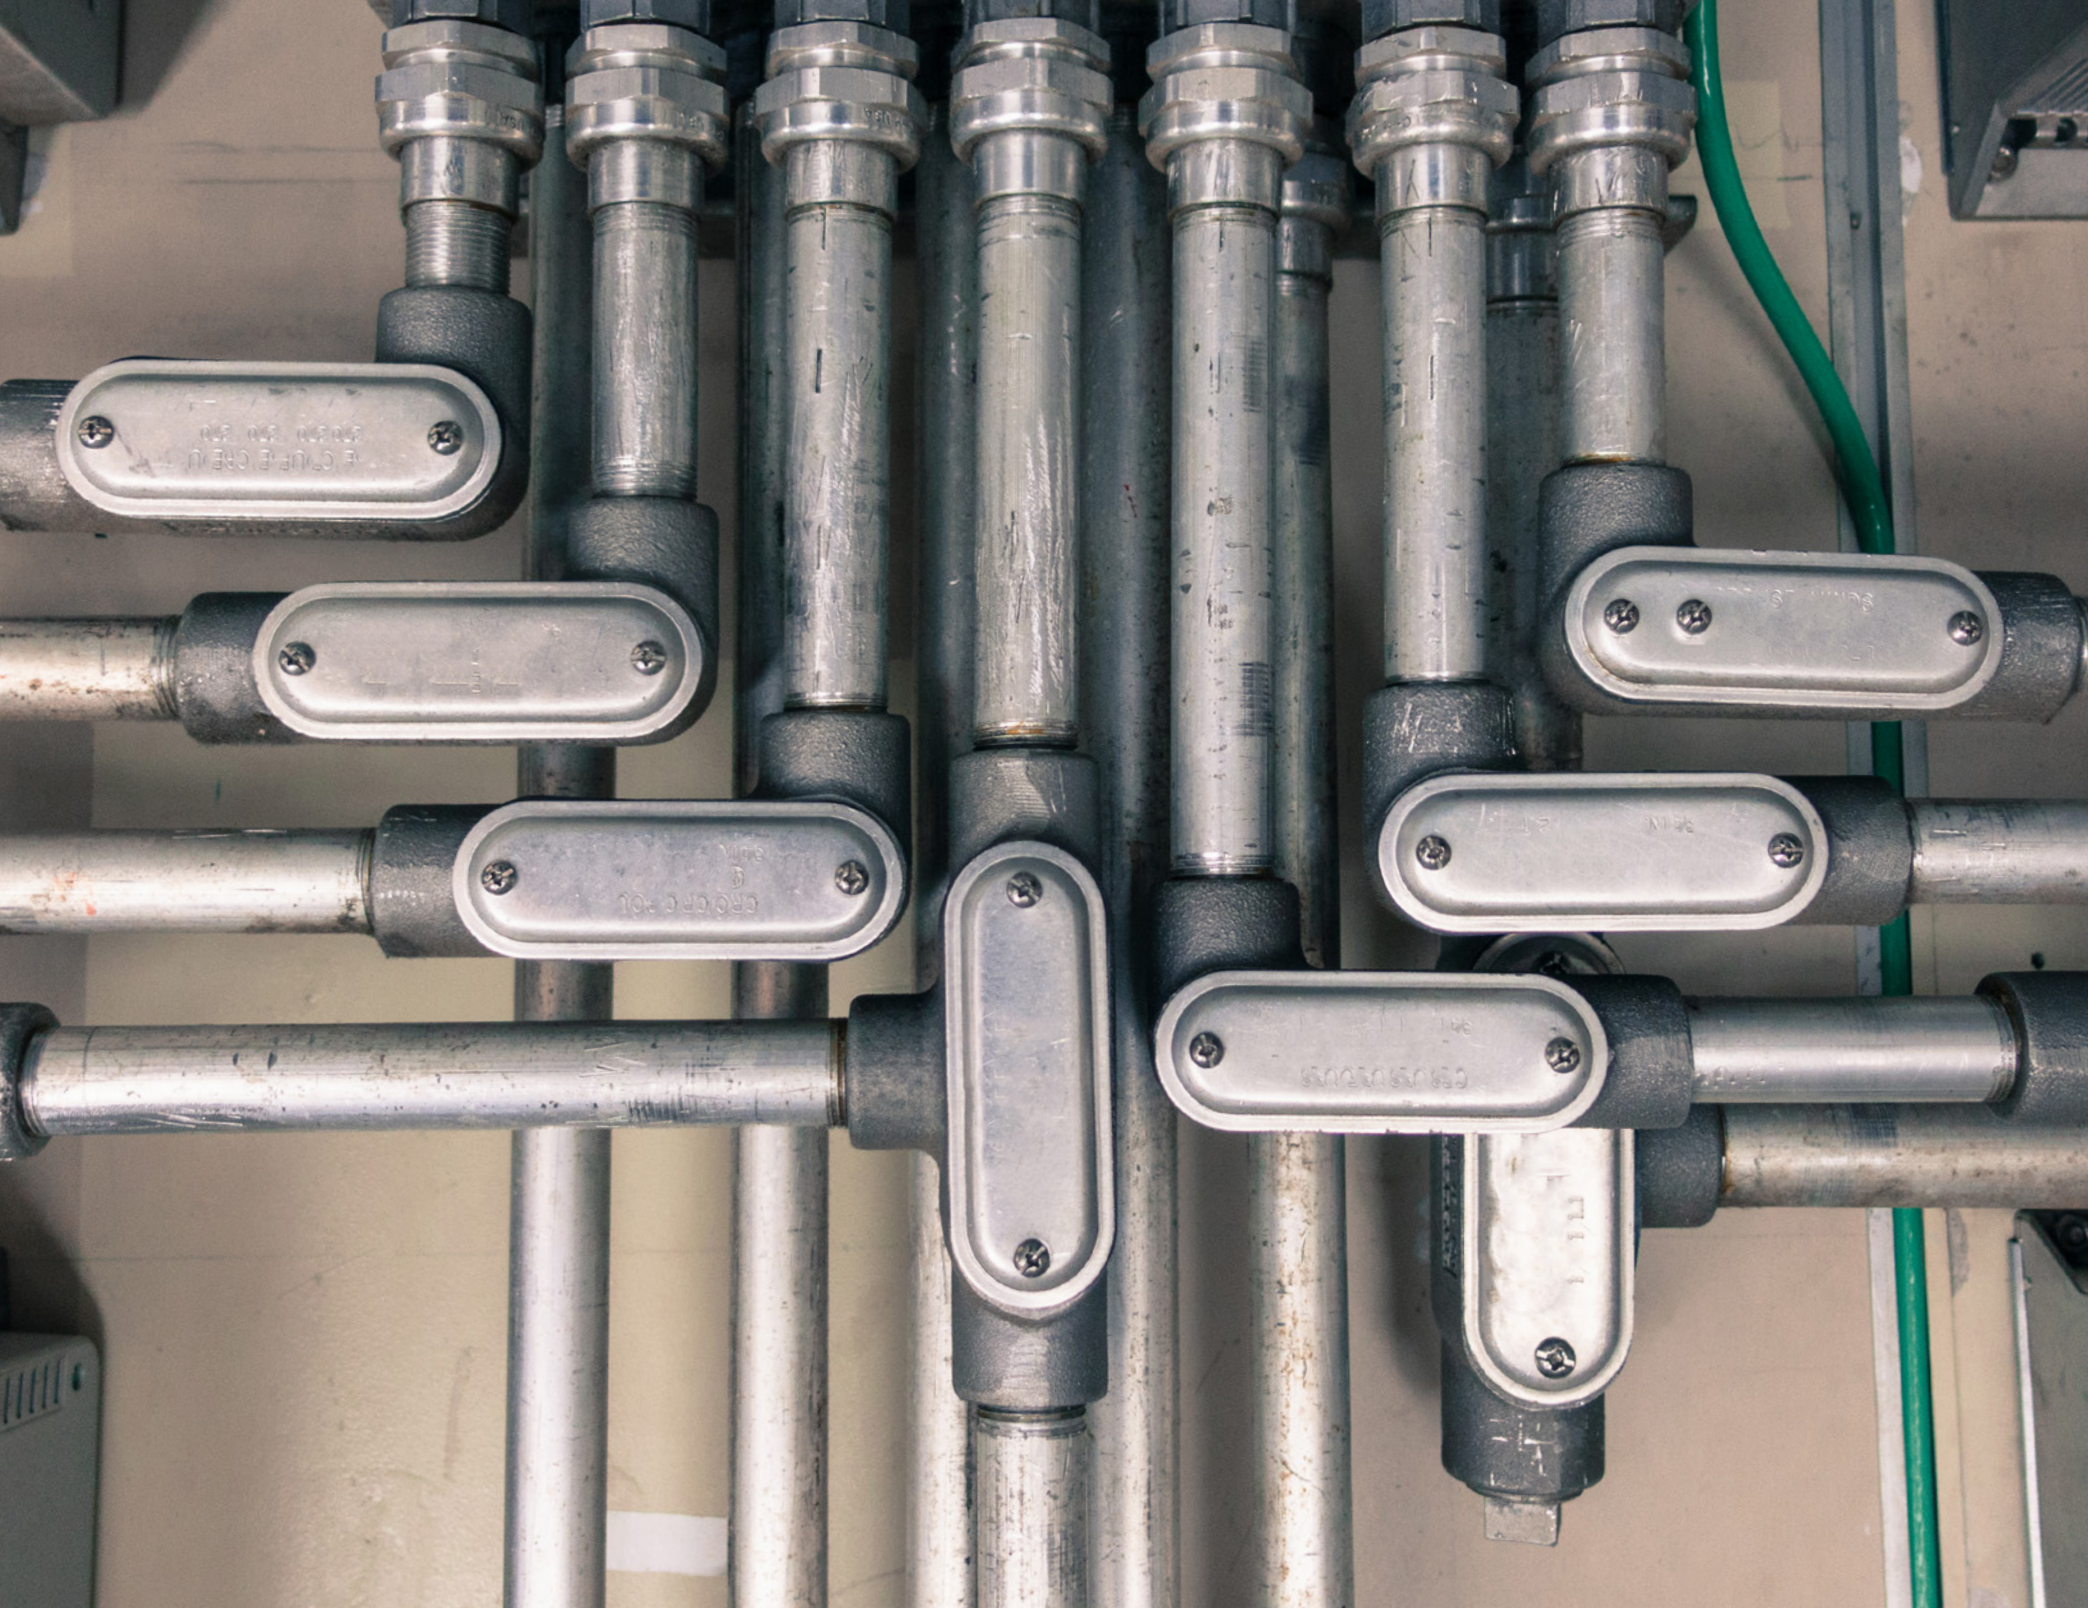


RIGID CONDUIT BODIES

THREADED LB TYPE



LB1



FEATURES
- Threaded LB type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LB1	1/2"	1	6 AWG	10	100	28	4.295"	2.15"	1.33"
LB2	3/4"	2	6 AWG	10	50	19	5.09"	2.43"	1.54"
LB3	1"	3	6 AWG	5	25	18	5.915"	2.765"	1.74"
LB4	1-1/4"	3	2 AWG	2	10	13	7.894"	3.665"	2.49"
LB5	1-1/2"	3	2 AWG	2	10	14	7.894"	3.665"	2.49"
LB6	2"	3	2/0 AWG	1	5	13	10.134"	4.275"	3.10"
LB7	2-1/2"	3	2/0 AWG	---	1	3	12.50"	5.437"	4.45"
LB8	3"	3	4/0 AWG	---	1	4	12.50"	5.675"	4.45"
LB9	3-1/2"	3	400 MCM	---	1	7	15.50"	6.922"	5.50"
LB10	4"	3	400 MCM	---	1	7	15.50"	6.922"	5.50"

THREADED C TYPE



C1TZ



FEATURES
- Threaded C type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
C1TZ	1/2"	1	6 AWG	10	100	24	4.72"	1.370"	1.33"
C2TZ	3/4"	2	6 AWG	10	50	21	5.57"	1.625"	1.54"
C3TZ	1"	3	6 AWG	5	25	15	6.46"	1.90"	1.74"
C4TZ	1-1/4"	3	2 AWG	2	10	15	8.528"	2.77"	2.49"
C5TZ	1-1/2"	3	2 AWG	2	10	9	8.528"	2.77"	2.49"
C6RTZ	2"	3	2/0 AWG	1	5	13	10.831"	3.335"	3.10"
C7	2-1/2"	3	4/0 AWG	---	1	3	13.50"	4.06"	4.45"
C8	3"	3	250 MCM	---	1	6	13"	4.685"	4.45"
C9	3-1/2"	3	350 MCM	---	1	8	15.937"	5.45"	5.50"
C10	4"	4	350 MCM	---	1	8	15.937"	5.45"	5.50"

RIGID CONDUIT BODIES

THREADED LL TYPE



LL1



FEATURES
- Threaded LL type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LL1	1/2"	1	6 AWG	10	100	28	4.295"	1.37"	2.03"
LL2	3/4"	2	6 AWG	10	50	23	5.09"	1.625"	2.33"
LL3	1"	3	6 AWG	5	25	18	5.915"	1.90"	2.65"
LL4	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
LL5	1-1/2"	3	2 AWG	2	10	16	7.894"	2.77"	3.385"
LL6	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
LL7	2-1/2"	3	4/0 AWG	---	1	6	13"	4.063"	5.709"
LL8	3"	3	250 MCM	---	1	6	12.75"	4.682"	5.506"
LL9	3-1/2"	3	350 MCM	---	1	8	15.50"	5.452"	6.171"
LL10	4"	4	350 MCM	---	1	8	15.50"	5.452"	6.171"

THREADED LR TYPE



LR1



FEATURES
- Threaded LR type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LR1	1/2"	1	6 AWG	10	100	29	4.295"	1.37"	2.03"
LR2	3/4"	2	6 AWG	10	50	24	5.09"	1.625"	2.33"
LR3	1"	3	6 AWG	5	25	19	5.915"	1.90"	2.65"
LR4	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
LR5	1-1/2"	3	2 AWG	2	10	17	7.894"	2.77"	3.385"
LR6	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
LR7	2-1/2"	3	4/0 AWG	---	1	6	13.50"	4.063"	5.709"
LR8	3"	3	250 MCM	---	1	6	12.75"	4.682"	5.506"
LR9	3-1/2"	3	350 MCM	---	1	8	15.50"	5.452"	6.171"
LR10	4"	4	350 MCM	---	1	8	15.50"	5.452"	6.171"

RIGID CONDUIT BODIES

THREADED T TYPE



T1



FEATURES
- Threaded T type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
T1	1/2"	1	6 AWG	10	100	32	4.72"	1.37"	2.03"
T2	3/4"	2	6 AWG	10	50	26	5.57"	1.625"	2.335"
T3	1"	3	6 AWG	5	25	18	6.46"	1.90"	2.705"
T4	1-1/4"	3	2 AWG	2	10	17	8.528"	2.77"	3.63"
T5	1-1/2"	3	2 AWG	2	10	19	8.528"	2.77"	3.63"
T6	2"	3	2/0 AWG	---	5	7	10.831"	3.335"	3.98"
T7	2-1/2"	3	4/0 AWG	---	1	7	13.50"	4.06"	5.825"
T8	3"	3	250 MCM	---	1	7	13"	4.685"	5.825"
T9	3-1/2"	3	350 MCM	---	1	9	15.937"	5.45"	7.06"
T10	4"	4	350 MCM	---	1	9	15.937"	5.45"	7.06"

RIGID CONDUIT BODIES WITH COVER AND GASKET

THREADED LB TYPE



LB1CG

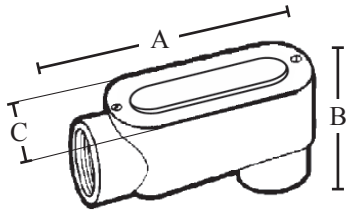

FEATURES
- Threaded LB type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LB1CG	1/2"	1	6 AWG	10	100	34	4.295"	2.15"	1.33"
LB2CG	3/4"	2	6 AWG	10	50	23	5.09"	2.43"	1.54"
LB3CG	1"	3	6 AWG	5	25	19	5.915"	2.765"	1.74"
LB4CG	1-1/4"	3	2 AWG	2	10	14	7.894"	3.665"	2.49"
LB5CG	1-1/2"	3	2 AWG	2	10	15	7.894"	3.665"	2.49"
LB6CG	2"	3	2/0 AWG	1	5	14	10.134"	4.275"	3.10"
LB7CG	2-1/2"	3	2/0 AWG	---	1	7	12.50"	5.437"	4.45"
LB8CG	3"	3	4/0 AWG	---	1	7	12.50"	5.675"	4.45"
LB9CG	3-1/2"	3	400 MCM	---	1	10	15.50"	6.922"	5.50"
LB10CG	4"	3	400 MCM	---	1	10	15.50"	6.922"	5.50"

RIGID CONDUIT BODIES WITH COVER AND GASKET

THREADED C TYPE



C1CG

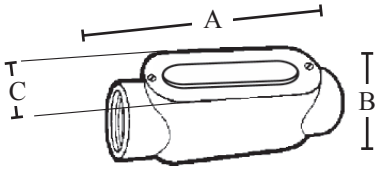

FEATURES
- Threaded C type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
C1CG	1/2"	1	6 AWG	10	100	30	4.72"	1.37"	1.33"
C2CG	3/4"	2	6 AWG	10	50	25	5.57"	1.625"	1.54"
C3CG	1"	3	6 AWG	5	25	18	6.46"	1.90"	1.74"
C4CG	1-1/4"	3	2 AWG	2	10	17	8.528"	2.77"	2.49"
C5CG	1-1/2"	3	2 AWG	2	10	19	8.528"	2.77"	2.49"
C6CG	2"	3	2/0 AWG	1	5	14	10.831"	3.335"	3.10"
C7CG	2-1/2"	3	4/0 AWG	---	1	7	13.50"	4.06"	4.45"
C8CG	3"	3	250 MCM	---	1	7	13.50"	4.685"	4.45"
C9CG	3-1/2"	3	350 MCM	---	1	10	15.937"	5.45"	5.50"
C10CG	4"	4	350 MCM	---	1	10	15.937"	5.45"	5.50"

THREADED LL TYPE



LL1CG



FEATURES
- Threaded LL type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LL1CG	1/2"	1	6AWG	10	100	36	4.295"	1.37"	2.03"
LL2CG	3/4"	2	6AWG	10	50	23	5.09"	1.625"	2.33"
LL3CG	1"	3	6AWG	5	25	19	5.915"	1.90"	2.65"
LL4CG	1-1/4"	3	2AWG	2	10	15	7.894"	2.77"	3.385"
LL5CG	1-1/2"	3	2AWG	2	10	16	7.894"	2.77"	3.385"
LL6CG	2"	3	2/0AWG	1	5	14	10.134"	3.335"	3.81"
LL7CG	2-1/2"	3	4/0AWG	---	1	7	13"	4.063"	5.709"
LL8CG	3"	3	250MCM	---	1	7	12.75"	4.682"	5.506"
LL9CG	3-1/2"	3	350MCM	---	1	10	15.50"	5.452"	6.171"
LL10CG	4"	4	350MCM	---	1	10	15.50"	5.452"	6.171"

RIGID CONDUIT BODIES WITH COVER AND GASKET

THREADED LR TYPE



LR1CG



c UL us

FEATURES
- Threaded LR type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LR1CG	1/2"	1	6 AWG	10	100	36	4.295"	1.37"	2.03"
LR2CG	3/4"	2	6 AWG	10	50	28	5.09"	1.625"	2.33"
LR3CG	1"	3	6 AWG	5	25	17	5.915"	1.90"	2.65"
LR4CG	1-1/4"	3	2 AWG	2	10	15	7.894"	2.77"	3.385"
LR5CG	1-1/2"	3	2 AWG	2	10	18	7.894"	2.77"	3.385"
LR6CG	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
LR7CG	2-1/2"	3	4/0 AWG	----	1	7	13"	4.063"	5.709"
LR8CG	3"	3	250 MCM	---	1	7	12.75"	4.682"	5.506"
LR9CG	3-1/2"	3	350 MCM	---	1	10	15.50"	5.452"	6.171"
LR10CG	4"	4	350 MCM	---	1	10	15.50"	5.452"	6.171"

THREADED T TYPE



T1CG



c UL us

FEATURES
- Threaded T type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
T1CG	1/2"	1	6 AWG	10	100	38	4.72"	1.37"	1.33"
T2CG	3/4"	2	6 AWG	10	50	30	5.57"	1.625"	1.54"
T3CG	1"	3	6 AWG	5	25	20	6.46"	1.90"	1.74"
T4CG	1-1/4"	3	2 AWG	2	10	19	8.528"	2.77"	2.49"
T5CG	1-1/2"	3	2 AWG	2	10	21	8.528"	2.77"	2.49"
T6CG	2"	3	2/0 AWG	---	5	10	10.831"	3.335"	3.10"
T7CG	2-1/2"	3	4/0 AWG	---	1	4	13.50"	4.06"	5.825"
T8CG	3"	3	250 MCM	---	1	5	13.50"	4.685"	5.825"
T9CG	3-1/2"	3	350 MCM	---	1	12	15.937"	5.45"	7.06"
T10CG	4"	4	350 MCM	---	1	9	15.937"	5.45"	7.06"

EMT CONDUIT BODIES

SET SCREW LB TYPE



ELB1

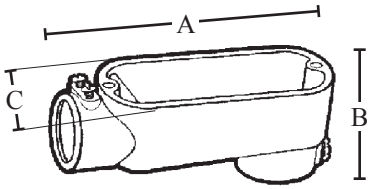

FEATURES
- Set screw EMT LB type
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
ELB1	1/2"	1	6 AWG	10	100	28	4.295"	2.15"	1.33"
ELB2	3/4"	2	6 AWG	10	50	19	5.09"	2.43"	1.54"
ELB3	1"	3	6 AWG	5	25	20	5.915"	2.765"	1.74"
ELB4	1-1/4"	3	2 AWG	2	10	13	7.894"	3.665"	2.49"
ELB5	1-1/2"	3	2 AWG	2	10	14	7.894"	3.665"	2.49"
ELB6	2"	3	2/0 AWG	1	5	13	10.134"	4.275"	3.10"
ELB7	2-1/2"	3	2/0 AWG	---	1	6	12.50"	5.437"	4.45"
ELB8	3"	3	4/0 AWG	---	1	6	12.50"	5.657"	4.45"
ELB9	3-1/2"	3	400 MCM	---	1	8	15.50"	6.922"	5.50"
ELB10	4"	3	400 MCM	---	1	8	15.50"	6.922"	5.50"

SET SCREW C TYPE



EC1



FEATURES
- Set screw C type
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
EC1	1/2"	1	6 AWG	10	100	24	4.72"	1.370"	1.33"
EC2	3/4"	2	6 AWG	10	50	21	5.57"	1.625"	1.54"
EC3	1"	3	6 AWG	5	25	25	6.46"	1.90"	1.74"
EC4	1-1/4"	3	2 AWG	2	10	15	8.528"	2.77"	2.49"
EC5	1-1/2"	3	2 AWG	2	10	17	8.528"	2.77"	2.49"
EC6	2"	3	2/0 AWG	1	5	13	10.831"	3.335"	3.10"
EC7	2-1/2"	3	4/0 AWG	---	1	6	13"	4.063"	5.709"
EC8	3"	3	250 MCM	---	1	7	12.50"	4.682"	5.506"
EC9	3-1/2"	3	350 MCM	---	1	8	15.50"	5.452"	6.171"
EC10	4"	4	350 MCM	---	1	8	15.50"	5.452"	6.171"

EMT CONDUIT BODIES

SET SCREW LL TYPE



ELL1



FEATURES
- Set screw LL type
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	MAX. NUMBER	MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
ELL1	1/2"	1	6 AWG	10	100	30	4.295"	1.37"	2.03"
ELL2	3/4"	2	6 AWG	10	50	23	5.09"	1.625"	2.33"
ELL3	1"	3	6 AWG	5	25	18	5.915"	1.90"	2.65"
ELL4	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
ELL5	1-1/2"	3	2 AWG	2	10	16	7.894"	2.77"	3.385"
ELL6	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
ELL7	2-1/2"	3	4/0 AWG	---	1	6	12.50"	5.437"	4.45"
ELL8	3"	3	250 MCM	---	1	6	12.50"	5.657"	4.45"
ELL9	3-1/2"	3	350 MCM	---	1	8	15.50"	6.922"	5.50"
ELL10	4"	4	350 MCM	---	1	8	15.50"	6.922"	5.50"

SET SCREW LR TYPE



ELR1



FEATURES
- Set screw LR type
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
ELR1	1/2"	1	6 AWG	10	100	30	4.295"	1.37"	2.03"
ELR2	3/4"	2	6 AWG	10	50	24	5.09"	1.625"	2.33"
ELR3	1"	3	6 AWG	5	25	16	5.915"	1.90"	2.65"
ELR4	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
ELR5	1-1/2"	3	2 AWG	2	10	17	7.894"	2.77"	3.385"
ELR6	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
ELR7	2-1/2"	3	4/0 AWG	---	1	6	12.50"	5.437"	4.45"
ELR8	3"	3	250 MCM	---	1	6	12.50"	5.657"	4.45"
ELR9	3-1/2"	3	350 MCM	---	1	8	15.50"	6.922"	5.50"
ELR10	4"	4	350 MCM	---	1	8	15.50"	6.922"	5.50"

EMT CONDUIT BODIES

SET SCREW T TYPE



ET1



FEATURES
- Set screw T type
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
ET1	1/2"	1	6 AWG	10	100	32	4.72"	1.37"	2.03"
ET2	3/4"	2	6 AWG	10	50	30	5.57"	1.625"	2.335"
ET3	1"	3	6 AWG	5	25	15	6.46"	1.90"	2.705"
ET4	1-1/4"	3	2 AWG	2	10	17	8.528"	2.77"	3.63"
ET5	1-1/2"	3	2 AWG	2	10	19	8.528"	2.77"	3.63"
ET6	2"	3	2/0 AWG	---	2	5	10.831"	3.335"	3.98"
ET7	2-1/2"	3	4/0 AWG	---	1	7	13.50"	4.06"	5.825"
ET8	3"	3	250 MCM	---	1	7	13.50"	4.685"	5.825"
ET9	3-1/2"	3	350 MCM	---	1	9	15.937"	5.45"	7.06"
ET10	4"	4	350 MCM	---	1	9	15.937"	5.45"	7.06"

EMT CONDUIT BODIES WITH COVER AND GASKET

SET SCREW LB TYPE



ELB1CG



FEATURES
- Set screw LB type with cover and gasket
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
ELB1CG	1/2"	1	6 AWG	10	100	32	4.295"	2.15"	1.33"
ELB2CG	3/4"	2	6 AWG	10	50	23	5.09"	2.43"	1.54"
ELB3CG	1"	3	6 AWG	5	25	19	5.915"	2.765"	1.74"
ELB4CG	1-1/4"	3	2 AWG	2	10	14	7.894"	3.665"	2.49"
ELB5CG	1-1/2"	3	2 AWG	2	10	15	7.894"	3.665"	2.49"
ELB6CG	2"	3	2/0 AWG	1	5	14	10.134"	4.275"	3.10"
ELB7CG	2-1/2"	3	2/0 AWG	---	1	7	12.50"	5.437"	4.45"
ELB8CG	3"	3	4/0 AWG	---	1	7	12.50"	5.657"	4.45"
ELB9CG	3-1/2"	3	400 MCM	---	1	10	15.50"	6.922"	5.50"
ELB10CG	4"	3	400 MCM	---	1	10	15.50"	6.922 "	5.50"

EMT CONDUIT BODIES WITH COVER AND GASKET

SET SCREW C TYPE



EC1CG



FEATURES
- Set screw C type with cover and gasket
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
EC1CG	1/2"	1	6 AWG	10	100	31	4.72"	1.37"	1.33"
EC2CG	3/4"	2	6 AWG	10	50	21	5.57"	1.625"	1.54"
EC3CG	1"	3	6 AWG	5	25	17	6.46"	1.90"	1.74"
EC4CG	1-1/4"	3	2 AWG	2	10	14	8.528"	2.77"	2.49"
EC5CG	1-1/2"	3	2 AWG	2	10	15	8.528"	2.77"	2.49"
EC6CG	2"	3	2/0 AWG	1	5	10	10.831"	3.335"	3.10"
EC7CG	2-1/2"	3	4/0 AWG	---	1	4	13"	4.063"	5.709"
EC8CG	3"	3	250 MCM	---	1	5	12.50"	4.682"	5.506"
EC9CG	3-1/2"	3	350 MCM	---	1	8	15.50"	5.452"	6.171"
EC10CG	4"	4	350 MCM	---	1	8	15.50"	5.452 "	6.171"

SET SCREW LL TYPE



ELL1CG



FEATURES
- Set screw LL type with cover and gasket
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
ELL1CG	1/2"	1	6 AWG	10	100	30	4.295"	1.37"	2.03"
ELL2CG	3/4"	2	6 AWG	10	50	23	5.09"	1.625"	2.33"
ELL3CG	1"	3	6 AWG	5	25	18	5.915"	1.90"	2.65"
ELL4CG	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
ELL5CG	1-1/2"	3	2 AWG	2	10	16	7.894"	2.77"	3.385"
ELL6CG	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
ELL7CG	2-1/2"	3	4/0 AWG	---	1	6	12.50"	5.437"	4.45"
ELL8CG	3"	3	250 MCM	---	1	6	12.50"	5.657"	4.45"
ELL9CG	3-1/2"	3	350 MCM	---	1	8	15.50"	6.922"	5.50"
ELL10CG	4"	4	350 MCM	---	1	8	15.50"	6.922"	5.50"

EMT CONDUIT BODIES WITH COVER AND GASKET

SET SCREW LR TYPE



ELR1CG

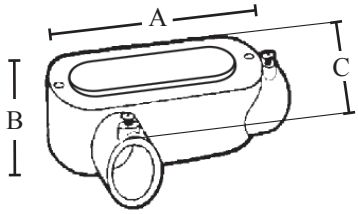

c UL us

FEATURES
- Set screw LR type with cover and gasket
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
ELR1CG	1/2"	1	6 AWG	10	100	36	4.295"	1.37"	2.03"
ELR2CG	3/4"	2	6 AWG	10	50	28	5.09"	1.625"	2.33"
ELR3CG	1"	3	6 AWG	5	25	17	5.915"	1.90"	2.65"
ELR4CG	1-1/4"	3	2 AWG	2	10	15	7.894"	2.77"	3.385"
ELR5CG	1-1/2"	3	2 AWG	2	10	18	7.894"	2.77"	3.385"
ELR6CG	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
ELR7CG	2-1/2"	3	4/0 AWG	---	1	7	12.50"	5.437"	4.45"
ELR8CG	3"	3	250 MCM	---	1	7	12.50"	5.657"	4.45"
ELR9CG	3-1/2"	3	350 MCM	---	1	10	15.50"	6.922"	5.50"
ELR10CG	4"	4	350 MCM	---	1	10	15.50"	6.922"	5.50"

SET SCREW T TYPE



ET1CG



c UL us

FEATURES
- Set screw T type with cover and gasket
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
ET1CG	1/2"	1	6 AWG	10	100	38	4.72"	1.37"	2.03"
ET2CG	3/4"	2	6 AWG	10	50	30	5.57"	1.625"	2.335"
ET3CG	1"	3	6 AWG	5	25	20	6.46"	1.90"	2.705"
ET4CG	1-1/4"	3	2 AWG	2	10	19	8.528"	2.77"	3.63"
ET5CG	1-1/2"	3	2 AWG	2	10	21	8.528"	2.77"	3.63"
ET6CG	2"	3	2/0 AWG	1	5	5	10.831"	3.335"	3.98"
ET7CG	2-1/2"	3	4/0 AWG	---	1	8	13.50"	4.06"	5.825"
ET8CG	3"	3	250 MCM	---	1	8	13.50"	4.685"	5.825"
ET9CG	3-1/2"	3	350 MCM	---	1	11	15.937"	5.45"	7.06"
ET10CG	4"	4	350 MCM	---	1	11	15.937"	5.45"	7.06"

EMT AND RIGID COMBINATION CONDUIT BODIES

LB TYPE



LB1SS



FEATURES
- Combination LB type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LB1SS	1/2"	1	6 AWG	10	100	28	4.56"	2.06"	1.31"
LB2SS	3/4"	2	6 AWG	10	50	19	5.31"	2.37"	1.48"
LB3SS	1"	3	6 AWG	5	25	18	6.25"	2.63"	1.75"
LB4SS	1-1/4"	3	2 AWG	2	10	13	8.22"	3.50"	2.40"
LB5SS	1-1/2"	3	2 AWG	2	10	14	8.22"	3.75"	2.40"
LB6SS	2"	3	2/0 AWG	---	5	13	10.13"	4.13"	3.10"

C TYPE



C1SS



FEATURES
- Combination C type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
C1SS	1/2"	1	6 AWG	10	100	24	5.35"	1.31"	1.31"
C2SS	3/4"	2	6 AWG	10	50	21	6"	1.62"	1.48"
C3SS	1"	3	6 AWG	5	25	15	7.06"	1.88"	1.75"
C4SS	1-1/4"	3	2 AWG	2	10	15	9.25"	2.50"	2.40"
C5SS	1-1/2"	3	2 AWG	2	10	17	9.25"	2.67"	2.40"
C6SS	2"	3	2/0 AWG	---	5	13	11.50"	3.29"	3.05"

EMT AND RIGID COMBINATION CONDUIT BODIES

LL TYPE



LL1SS



FEATURES
- Combination LL type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LL1SS	1/2"	1	6 AWG	10	100	28	4.56"	1.31"	2.06"
LL2SS	3/4"	2	6 AWG	10	50	23	5.31"	1.62"	2.23"
LL3SS	1"	3	6 AWG	5	25	18	6.25"	1.88"	2.50"
LL4SS	1-1/4"	3	2 AWG	2	10	14	8.22"	2.50"	3.40"
LL5SS	1-1/2"	3	2 AWG	2	10	16	8.22"	2.67"	3.48"
LL6SS	2"	3	2/0 AWG	---	5	14	10.48"	3.29"	4.07"

LR TYPE



LR1SS



FEATURES
- Combination LR type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LR1SS	1/2"	1	6 AWG	10	100	29	4.56"	1.31"	2.06"
LR2SS	3/4"	2	6 AWG	10	50	24	5.31"	1.62"	2.23"
LR3SS	1"	3	6 AWG	5	25	19	6.25"	1.88"	2.50"
LR4SS	1-1/4"	3	2 AWG	2	10	14	8.22"	2.50"	3.40"
LR5SS	1-1/2"	3	2 AWG	2	10	17	8.22"	2.67"	3.48"
LR6SS	2"	3	2/0 AWG	---	5	4	10.48"	3.29"	4.07"

EMT AND RIGID COMBINATION CONDUIT BODIES

T TYPE



T1SS



FEATURES
- Combination T type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Steel screws

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
T1SS	1/2"	1	6 AWG	10	100	32	5.35"	1.31"	2.02"
T2SS	3/4"	2	6 AWG	10	50	26	6"	1.62"	2.22"
T3SS	1"	3	6 AWG	5	25	18	7.06"	1.88"	2.56"
T4SS	1-1/4"	3	2 AWG	2	10	17	7.25"	2.50"	3.50"
T5SS	1-1/2"	3	2 AWG	2	10	19	9.25"	2.67"	3.50"
T6SS	2"	3	2/0 AWG	---	5	5	11.50"	3.29"	4.25"

EMT AND RIGID COMBINATION CONDUIT BODIES WITH COVER AND GASKET

LB TYPE



LB1SSCG



FEATURES
- Combination LB type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LB1SSCG	1/2"	1	6 AWG	10	100	34	4.56"	2.06"	1.31"
LB2SSCG	3/4"	2	6 AWG	10	50	23	5.31"	2.37"	1.48"
LB3SSCG	1"	3	6 AWG	5	25	19	6.25"	2.63"	1.75"
LB4SSCG	1-1/4"	3	2 AWG	2	10	14	8.22"	3.50"	2.40"
LB5SSCG	1-1/2"	3	2 AWG	2	10	15	8.22"	3.75"	2.40"
LB6SSCG	2"	3	2/0 AWG	---	5	14	10.13"	4.28"	3.10"

EMT AND RIGID COMBINATION CONDUIT BODIES WITH COVER AND GASKET

C TYPE



C1SSCG



FEATURES
- Combination C type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
C1SSCG	1/2"	1	6 AWG	10	100	30	5.35"	1.31"	1.31"
C2SSCG	3/4"	2	6 AWG	10	50	21	6"	1.62"	1.48"
C3SSCG	1"	3	6 AWG	5	25	17	7.06"	1.88"	1.75"
C4SSCG	1-1/4"	3	2 AWG	2	10	12	9.25"	2.50"	2.40"
C5SSCG	1-1/2"	3	2 AWG	2	10	15	9.25"	2.67"	2.40"
C6SSCG	2"	3	2/0 AWG	---	5	10	11.50"	3.29"	3.05"

LL TYPE



LL1SSCG



FEATURES
- Combination LL type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LL1SSCG	1/2"	1	6 AWG	10	100	36	4.56"	1.31"	2.06"
LL2SSCG	3/4"	2	6 AWG	10	50	23	5.31"	1.62"	2.23"
LL3SSCG	1"	3	6 AWG	5	25	19	6.25"	1.88"	2.50"
LL4SSCG	1-1/4"	3	2 AWG	2	10	15	8.22"	2.50"	3.40"
LL5SSCG	1-1/2"	3	2 AWG	2	10	16	8.22"	2.67"	3.48"
LL6SSCG	2"	3	2/0 AWG	---	5	14	10.48"	3.29"	4.07"

EMT AND RIGID COMBINATION CONDUIT BODIES WITH COVER AND GASKET

LR TYPE



LR1SSCG



FEATURES
- Combination LR type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LR1SSCG	1/2"	1	6 AWG	10	100	30	4.56"	1.31"	2.06"
LR2SSCG	3/4"	2	6 AWG	10	50	20	5.31"	1.62"	2.23"
LR3SSCG	1"	3	6 AWG	5	25	16	6.25"	1.88"	2.50"
LR4SSCG	1-1/4"	3	2 AWG	2	10	12	8.22"	2.50"	3.40"
LR5SSCG	1-1/2"	3	2 AWG	2	10	12	8.22"	2.67"	3.48"
LR6SSCG	2"	3	2/0 AWG	---	5	9	10.48"	3.29"	4.07"

T TYPE



T1SSCG



FEATURES
- Combination T type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
T1SSCG	1/2"	1	6 AWG	10	100	35	5.35"	1.31"	2.02"
T2SSCG	3/4"	2	6 AWG	10	50	23	6"	1.62"	2.22"
T3SSCG	1"	3	6 AWG	5	25	18	7.06"	1.88"	2.56"
T4SSCG	1-1/4"	3	2 AWG	2	10	13	7.25"	2.50"	3.50"
T5SSCG	1-1/2"	3	2 AWG	2	10	11	9.25"	2.67"	3.50"
T6SSCG	2"	3	2/0 AWG	---	5	10	11.50"	3.29"	4.25"

EMT AND RIGID COMBINATION CONDUIT BODIES WITH COVER AND GASKET

TB TYPE



TB1SSCG



FEATURES
- Combination TB type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

STANDARD FINISH
- Powder coat


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
TB1SSCG	1/2"	1	6 AWG	10	100	38	5.35"	1.31"	2.02"
TB2SSCG	3/4"	2	6 AWG	10	50	30	6"	1.62"	2.22"
TB3SSCG	1"	3	6 AWG	5	25	18	7.06"	1.88"	2.56"
TB4SSCG	1-1/4"	3	2 AWG	2	10	17	7.25"	2.50"	3.50"
TB5SSCG	1-1/2"	3	2 AWG	2	10	19	9.25"	2.67"	3.50"
TB6SSCG	2"	3	2/0 AWG	---	5	14	11.50"	3.29"	4.25"

CONDUIT BODY GASKETS



581



FEATURES
- Provides dust proof seal between conduit body and cover to protect from hazardous elements
- Fits all Form 5 LB, LL, LR, C and T type conduit bodies and covers

APPLICATIONS
- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- For use with Southwire Conduit Bodies 1/2" – 4"

STANDARD MATERIAL
- Neoprene


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
581	1/2"	50	500	1	3.935"	1.36"
582	3/4"	50	500	1	4.60"	1.55"
583	1"	25	500	2	5.37"	1.76"
584	1-1/4" – 1-1/2"	25	500	2	7.25"	2.50"
586	2"	25	250	2	9.50"	3.07"
587	2-1/2" – 3"	10	100	2	12.125"	4.355"
589	3-1/2" – 4"	5	50	2	14.812"	5.40"

CONDUIT BODY COVERS

ALUMINUM WITH SCREWS



571



FEATURES
- Lightweight and corrosion resistant
- Includes screws

APPLICATIONS
- Designed for use with Southwire Conduit Bodies; interchangeable with all major brands

STANDARD MATERIAL
- Aluminum


CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
571	1/2"	25	250	15	3.875"	1.31"
572	3/4"	25	250	20	4.625"	1.52"
573	1"	10	100	9	5.315"	1.71"
574	1-1/4" - 1-1/2"	---	25	4	7.24"	2.51"
576	2"	---	25	7	9.484"	3.11"
577	2-1/2" - 3"	---	10	8	12.187"	4.44"
579	3-1/2" - 4"	---	5	7	14.937"	5.50"

HOT DIP GALVANIZED - MALLEABLE IRON



571MHDG



Conforms to finish thickness ASTM A123/123M

FEATURES
- Hot dip galvanized for added durability and corrosion protection, use with gasket for wet locations
- Includes screws
- Fits malleable conduit body

APPLICATIONS
- Compatible with all Form 5 & Form 35 series conduit bodies
- For use with Southwire Conduit Bodies 1/2" – 4"

STANDARD MATERIAL
- Malleable iron
- Galvanized steel screws

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: 514B
- Fed. Spec. A-A-50563
- NEMA FB 1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
571MHDG	1/2"	10	100	24	3.97"	1.34"
572MHDG	3/4"	10	100	31	4.68"	1.57"
573MHDG	1"	5	50	21	5.39"	1.79"
574MHDG	1-1/4" – 1-1/2"	---	25	23	7.23"	2.52"
576MHDG	2"	---	25	52	9.51"	3.15"
577MHDG	2-1/2" – 3"	---	10	35	12.24"	4.45"
579MHDG	3-1/2" – 4"	---	10	55	14.99"	5.53"

CONDUIT BODY COVERS

ZINC PLATED STEEL WITH SCREWS



571S



FEATURES
- Domed design allows for additional wiring space
- Includes screws
- Fits malleable conduit body

APPLICATIONS
- Designed for use with Southwire Conduit Bodies; interchangeable with all major brands

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
571S	1/2"	25	250	15	3.875"	1.31"
572S	3/4"	25	250	20	4.625"	1.52"
573S	1"	10	100	8	5.315"	1.71"
574S	1-1/4" – 1-1/2"	---	25	4	7.24"	2.51"
576S	2"	---	25	7	9.484"	3.11"
577S	2-1/2" – 3"	---	10	7	12.187"	4.44"
579S	3-1/2" – 4"	---	5	9	14.937"	5.50"

MOGUL CONDUIT BODIES WITH COVER AND GASKET

LB TYPE - ALUMINUM



MLBCG4



FEATURES
- Meets NEC 6x requirement
- NEMA FB 1, UL listed for use in wet locations
- Protects electrical installations in extreme industrial environments

APPLICATIONS
- Mogul conduit bodies are used to gain greater access to the interior of a raceway for wire pulling, inspection and maintenance where the raceway changes direction

STANDARD MATERIAL
- Body - Aluminum
- Gasket - Fiber
- Stainless steel screws

CERTIFICATIONS
- cULus
- NEMA FB 1


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
MLBCG4	1-1/4"	3	2 AWG	40	5	8	9.68"	4.29"	2.12"
MLBCG5	1-1/2"	3	1/0 AWG	128	2	10	14.56"	6.32"	3.18"
MLBCG6	2"	3	4/0 AWG	128	2	9	14.56"	6.32"	3.18"


MOGUL CONDUIT BODIES WITH COVER AND GASKET

LB TYPE WITH ROLLERS - HOT DIP GALVANIZED - MALLEABLE IRON



MLB3CGHDG

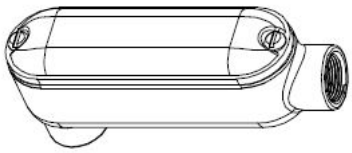

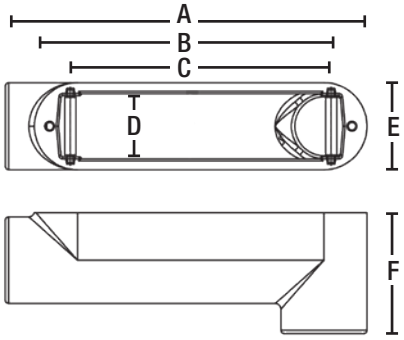

FEATURES

- c(UL)us wet locations
- Built in cable pulling roller
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

APPLICATIONS

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R

c UL us


PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E	F
		MAX. NUMBER	MAX. SIZE									
MLB3CGHDG	1"	3	4 AWG	19	1	4	8.62"	5.98"	---	1.71"	2.19"	2.81"
MLB4CGHDG	1-1/4"	3	2 AWG	25	1	5	8.62"	5.98"	---	1.71"	2.19"	3.25"
MLB5CGHDG	1-1/2"	3	1/0 AWG	57	1	9	12.72"	10"	9.17"	2.26"	3.03"	3.63"
MLB6CGHDG	2"	3	4/0 MCM	75	1	13	12.72"	10"	9.17"	2.26"	3.03"	4.23"
MLB7CGHDG	2-1/2"	3	300 MCM	163	1	22	16.93"	15"	10.86"	3.41"	4.27"	5.22"
MLB8CGHDG	3"	3	350 MCM	211	1	38	16.93"	15"	10.86"	3.41"	4.27"	6.02"
MLB9CGHDG	3-1/2"	3	500 MCM	375	1	48	22.20"	19.96"	15.08"	4.28"	5.31"	6.71"
MLB10CGHDG	4"	3	500 MCM	439	1	59	22.20"	19.96"	15.08"	4.28"	5.31"	7.19"

MOGUL CONDUIT BODIES WITH COVER AND GASKET

C TYPE WITH ROLLERS - HOT DIP GALVANIZED - MALLEABLE IRON



MC3CGHDG

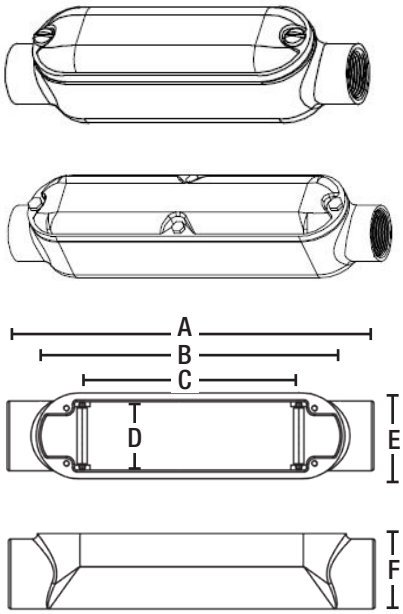

FEATURES

- c(UL)us wet locations
- Built in cable pulling roller
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

APPLICATIONS

- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R

c UL US


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E	F
MC3CGHDG	1"	3	4 AWG	19	1	4	9.57"	5.98"	---	1.71"	2.19"	1.88"
MC4CGHDG	1-1/4"	3	2 AWG	25	1	6	9.57"	5.98"	---	1.71"	2.19"	2.13"
MC5CGHDG	1-1/2"	3	1/0 AWG	57	1	10	13.75"	10"	9.17"	2.27"	3.03"	2.58"
MC6CGHDG	2"	3	4/0 MCM	75	1	14	13.75"	10"	9.17"	2.27"	3.03"	3.17"
MC7CGHDG	2-1/2"	3	300 MCM	163	1	29	18.40"	15"	10.86"	3.41"	4.27"	3.76"
MC8CGHDG	3"	3	300 MCM	211	1	38	18.40"	15"	10.86"	3.41"	4.27"	4.57"
MC9CGHDG	3-1/2"	3	350 MCM	375	1	56	23.19"	19.98"	15.08"	4.29"	5.31"	5.03"
MC10CGHDG	4"	3	350 MCM	439	1	65	23.19"	19.98"	15.08"	4.29"	5.31"	5.52"

MOGUL CONDUIT BODIES WITH COVER AND GASKET

LL TYPE - HOT DIP GALVANIZED - MALLEABLE IRON



MLL3CGHDG

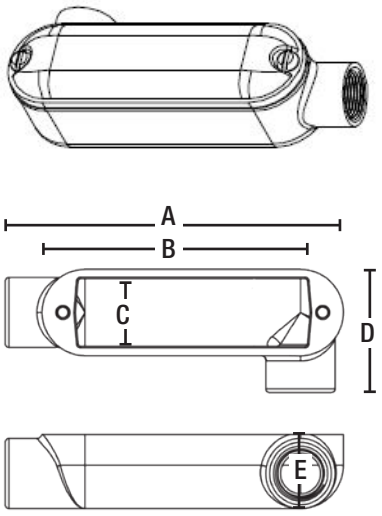

FEATURES

- c(UL)us wet locations
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

APPLICATIONS

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R

c UL US


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E
MLL3CGHDG	1"	3	4 AWG	19	1	4	8.62"	5.98"	1.71"	3.12"	1.87"
MLL4CGHDG	1-1/4"	3	2 AWG	25	1	6	8.62"	5.98"	1.71"	3.12"	2.31"
MLL5CGHDG	1-1/2"	3	1/0 AWG	57	1	10	12.72"	10"	2.26"	4.08"	2.58"
MLL6CGHDG	2"	3	4/0 AWG	75	1	14	12.72"	10"	2.26"	4.08"	3.17"

MOGUL CONDUIT BODIES WITH COVER AND GASKET

LR TYPE - HOT DIP GALVANIZED - MALLEABLE IRON



MLR3CGHDG

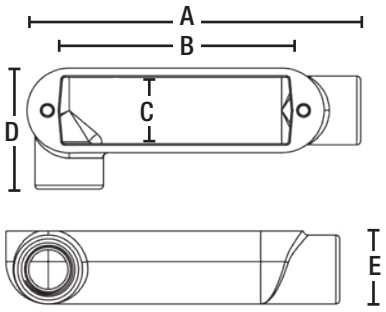

FEATURES

- c(UL)us wet locations
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

APPLICATIONS

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R

c UL US


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E
MLR3CGHDG	1"	3	4 AWG	19	1	4	8.62"	5.98"	1.71"	3.12"	1.87"
MLR4CGHDG	1-1/4"	3	2 AWG	25	1	6	8.62"	5.98"	1.71"	3.12"	2.31"
MLR5CGHDG	1-1/2"	3	1/0 AWG	57	1	10	12.72"	10"	2.26"	4.08"	2.58"
MLR6CGHDG	2"	3	4/0 AWG	75	1	14	12.72"	10"	2.26"	4.08"	3.17"

MOGUL CONDUIT BODIES WITH COVER AND GASKET

T TYPE - HOT DIP GALVANIZED - MALLEABLE IRON



MT3CGHDG

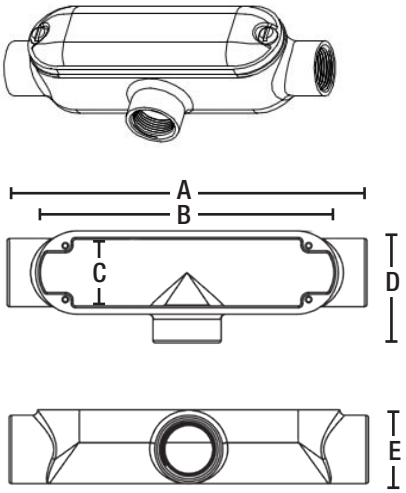

FEATURES

- c(UL)us wet locations
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

APPLICATIONS

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R

c UL US


PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E
MT3CGHDG	1"	3	4 AWG	19	1	4	9.57"	5.98"	1.71"	3.13"	1.87"
MT4CGHDG	1-1/4"	3	2 AWG	25	1	6	9.57"	5.98"	1.71"	3.13"	2.31"
MT5CGHDG	1-1/2"	3	1/0 AWG	57	1	10	13.74"	10"	2.26"	4.08"	2.58"
MT6CGHDG	2"	3	4/0 MCM	75	1	14	13.74"	10"	2.26"	4.08"	3.17"
MT7CGHDG	2-1/2"	3	300 MCM	163	1	29	18.39"	15"	3.41"	5.73"	3.76"
MT8CGHDG	3"	3	300 MCM	211	1	38	18.39"	15"	3.41"	5.73"	4.57"
MT9CGHDG	3-1/2"	3	350 MCM	375	1	56	23.89"	19.97"	4.29"	6.98"	5.02"
MT10CGHDG	4"	3	350 MCM	439	1	65	23.89"	19.97"	4.29"	6.98"	5.51"

RIGID CONDUIT BODIES

THREADED LB TYPE - MALLEABLE IRON



LB1M



FEATURES
- NPT tapered hubs
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated, aluminum enameled


CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE MAX.NUMBER	WIRE SIZE MAX. SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LB1M	1/2"	---	---	10	7	4.56"	2.06"	1.31"
LB2M	3/4"	3	6 AWG	10	9	5.31"	2.37"	1.48"
LB3M	1"	3	4 AWG	5	6	6.25"	2.63"	1.75"
LB4M	1-1/4"	3	2 AWG	5	23	8.22"	3.50"	2.40"
LB5M	1-1/2"	3	1/0 AWG	10	26	8.22"	3.75"	2.40"
LB6M	2"	3	4/0 AWG	5	26	10.48"	4.31"	3.05"
LB7M	2-1/2"	3	300 MCM	1	10	13.75"	4.45"	4.38"
LB8M	3"	3	350 MCM	1	13	13.75"	4.45"	4.38"
LB9M	3-1/2"	3	500 MCM	1	22	16.75"	5.80"	5.63"
LB10M	4"	3	500 MCM	1	24	16.75"	5.80"	5.63"

THREADED LB TYPE - HOT DIP GALVANIZED



LB1MHDG



Conforms to finish thickness ASTM A123/123M

FEATURES
- Hot dip galvanized finish provides superior protection against severe environmental factors

APPLICATIONS
- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514A and UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LB1MHDG	1/2"	---	---	4.5	10	7	4.69"	2.18"	1.36"
LB2MHDG	3/4"	3	6 AWG	7.5	10	9	5.42"	2.36"	1.57"
LB3MHDG	1"	3	4 AWG	12.5	5	6	6.28"	2.86"	1.79"
LB4MHDG	1-1/4"	3	2 AWG	32.3	5	12	8.12"	3.49"	2.52"
LB5MHDG	1-1/2"	3	1/0 AWG	35.3	2	11	8.15"	3.69"	2.52"
LB6MHDG	2"	3	4/0 AWG	73	1	6	10.53"	4.52"	3.15"
LB7MHDG	2-1/2"	3	300 MCM	142	1	10	13.76"	5.39"	4.45"
LB8MHDG	3"	3	400 MCM	173	1	13	13.82"	6.18"	4.45"
LB9MHDG	3-1/2"	3	500 MCM	300	1	22	16.65"	7.19"	5.53"
LB10MHDG	4"	3	500 MCM	328	1	24	16.65"	7.36"	5.53"

RIGID CONDUIT BODIES

THREADED C TYPE - MALLEABLE IRON



C1M

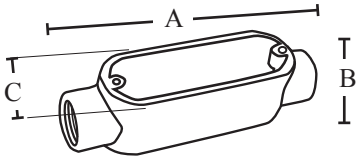

FEATURES
- NPT tapered hubs
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for maintenance and future system changes
- Connects conduit sections

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated, aluminum enameled


CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
C1M	1/2"	---	---	4.5	10	7	5.35"	1.31"	1.31"
C2M	3/4"	3	6 AWG	7.5	10	23	6"	1.62"	1.48"
C3M	1"	3	4 AWG	12.5	5	6	7.06"	1.88"	1.75"
C4M	1-1/4"	3	2 AWG	32.3	5	23	9.25"	2.50"	2.40"
C5M	1-1/2"	3	1/0 AWG	35.3	2	26	9.25"	2.67"	2.40"
C6M	2"	3	3/0 AWG	73	1	26	11.50"	3.29"	3.05"
C7M	2-1/2"	3	250 MCM	138	1	10	15"	3.9063"	4.312"
C8M	3"	3	250 MCM	170	1	12	15.125"	4.75"	4.312"
C9M	3-1/2"	3	350 MCM	300	1	21	18.125"	5.1875"	4.875"
C10M	4"	3	350 MCM	328	1	23	18.125"	5.5625"	4.875"

THREADED C TYPE - HOT DIP GALVANIZED



C1MHDG

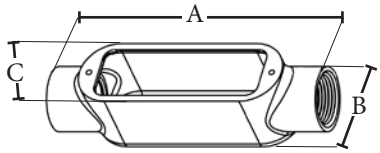

Conforms to finish thickness ASTM A123/123M

FEATURES
- Hot dip galvanized finish provides superior protection against severe environmental factors

APPLICATIONS
- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514A and UL514D
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
C1MHDG	1/2"	---	---	4.5	10	6	5.43"	1.46"	1.36"
C2MHDG	3/4"	3	6 AWG	7.5	10	9	6.18"	1.65"	1.57"
C3MHDG	1"	3	4 AWG	12.5	5	6	7.16"	1.98"	1.79"
C4MHDG	1-1/4"	3	2 AWG	32.3	5	12	9"	2.60"	2.52"
C5MHDG	1-1/2"	3	1/0 AWG	35.3	2	6	9.07"	2.80"	2.52"
C6MHDG	2"	3	3/0 AWG	73	1	6	11.54"	3.52"	3.15"
C7MHDG	2-1/2"	3	250 MCM	138	1	10	15.28"	3.98"	4.45"
C8MHDG	3"	3	250 MCM	170	1	15	15.39"	4.65"	4.45"
C9MHDG	3-1/2"	3	350 MCM	300	1	27	18.30"	5.43"	5.53"
C10MHDG	4"	3	350 MCM	328	1	24	18.30"	5.74"	5.53"

RIGID CONDUIT BODIES

THREADED LL TYPE - MALLEABLE IRON



LL1M



FEATURES
- NPT tapered hubs
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated, aluminum enameled

CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN³)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LL1M	1/2"	---	---	4.5	10	7	4.56"	1.31"	2.06"
LL2M	3/4"	3	6 AWG	7.5	10	9	5.31"	1.62"	2.23"
LL3M	1"	3	4 AWG	12.5	5	6	6.25"	1.88"	2.50"
LL4M	1-1/4"	3	2 AWG	32.3	5	23	8.22"	2.50"	3.40"
LL5M	1-1/2"	3	1/0 AWG	35.3	10	26	8.22"	2.67"	3.48"
LL6M	2"	3	4/0 AWG	73	5	26	10.48"	3.29"	4.07"
LL7M	2-1/2"	3	300 MCM	138	1	10	13.6094"	3.9063"	5.718"
LL8M	3"	3	350 MCM	170	1	13	13.875"	4.75"	5.875"
LL9M	3-1/2"	3	50 MCM	300	1	22	16.50"	6.8125"	7.125"
LL10M	4"	3	350 MCM	328	1	24	16.50"	7.1875"	7.125"

THREADED LL TYPE - HOT DIP GALVANIZED



LL1MHDG

Conforms to finish thickness ASTM A123/123M



FEATURES
- Hot dip galvanized finish provides superior protection against severe environmental factors

APPLICATIONS
- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN³)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LL1MHDG	1/2"	---	---	4.5	10	7	4.69"	1.46"	2.08"
LL2MHDG	3/4"	3	6 AWG	7.5	10	10	5.42"	1.65"	2.31"
LL3MHDG	1"	3	4 AWG	12.5	5	6	6.28"	1.98"	2.68"
LL4MHDG	1-1/4"	3	2 AWG	32.3	5	13	8.12"	2.60"	3.41"
LL5MHDG	1-1/2"	3	1/0 AWG	35.3	2	6	8.15"	2.80"	3.45"
LL6MHDG	2"	3	4/0 AWG	73	1	6	10.53"	3.52"	4.15"
LL7MHDG	2-1/2"	3	300 MCM	142	1	10	13.76"	3.98"	5.86"
LL8MHDG	3"	3	350 MCM	173	1	13	13.82"	4.65"	5.92"
LL9MHDG	1/2"	3	350 MCM	300	1	22	16.65"	5.43"	7.14"
LL10MHDG	4"	3	350 MCM	330	1	24	16.65"	5.74"	7.19"

RIGID CONDUIT BODIES

THREADED LR TYPE - MALLEABLE IRON



LR1M



FEATURES
- NPT tapered hubs
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated, aluminum enameled


CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN³)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LR1M	1/2"	---	---	4.5	10	7	4.56"	1.31"	2.06"
LR2M	3/4"	3	6 AWG	7.5	10	9	5.31"	1.62"	2.23"
LR3M	1"	3	4 AWG	12.5	5	6	6.25"	1.88"	2.50"
LR4M	1-1/4"	3	2 AWG	32.3	5	23	8.22"	2.50"	3.40"
LR5M	1-1/2"	3	1/0 AWG	35.3	10	26	8.22"	2.67"	3.48"
LR6M	2"	3	4/0 AWG	73	5	26	10.48"	3.29"	4.07"
LR7M	2-1/2"	3	300 MCM	138	1	10	13.75"	4.45"	4.38"
LR8M	3"	3	350 MCM	170	1	13	13.75"	4.45"	4.38"
LR9M	1/2"	3	350 MCM	300	1	22	16.75"	5.80"	5.63"
LR10M	4"	3	350 MCM	328	1	24	16.75"	5.80"	5.63"

THREADED LR TYPE - HOT DIP GALVANIZED



LR1MHDG



Conforms to finish thickness ASTM A123/123M

FEATURES
- Hot dip galvanized finish provides superior protection against severe environmental factors

APPLICATIONS
- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514A and UL 514D
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN³)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LR1MHDG	1/2"	---	---	4.5	10	7	4.69"	1.46"	2.08"
LR2MHDG	3/4"	3	6 AWG	7.5	10	10	5.42"	1.65"	2.31"
LR3MHDG	1"	3	4 AWG	12.5	5	6	6.28"	1.98"	2.68"
LR4MHDG	1-1/4"	3	2 AWG	32.3	5	13	8.12"	2.60"	3.41"
LR5MHDG	1-1/2"	3	1/0 AWG	35.3	2	6	8.15"	2.80"	3.45"
LR6MHDG	2"	3	4/0 AWG	73	1	6	10.53"	3.52"	4.15"
LR7MHDG	2-1/2"	3	300 MCM	142	1	10	13.76"	3.98"	5.86"
LR8MHDG	3"	3	350 MCM	173	1	13	13.82"	4.65"	5.92"
LR9MHDG	3-1/2"	3	350 MCM	300	1	22	16.65"	5.43"	7.14"
LR10MHDG	4"	3	350 MCM	330	1	24	16.65"	5.74"	7.19"

RIGID CONDUIT BODIES

THREADED T TYPE - MALLEABLE IRON



T1M

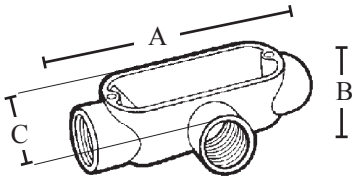

FEATURES
- NPT tapered hubs
- Suitable for use in concrete

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated, aluminum enameled


CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
T1M	1/2"	---	---	6	10	8	5.35"	1.31"	2.02"
T2M	3/4"	3	6 AWG	9.5	10	12	6"	1.62"	2.22"
T3M	1"	3	4 AWG	15	5	9	7.06"	1.88"	2.56"
T4M	1-1/4"	3	2 AWG	33	5	16	7.25"	2.50"	3.50"
T5M	1-1/2"	3	1 AWG	36	2	7	9.25"	2.67"	3.50"
T6M	2"	3	2/0 AWG	75	1	6	11.50"	3.29"	4.25"
T7M	2-1/2"	3	4/0 AWG	138	1	12	15"	3.9375"	5.718"
T8M	3"	3	4/0 AWG	170	1	15	15.125"	4.75"	8.875"
T9M	3-1/2"	3	350 MCM	300	1	23	18.125"	5.2031"	6.812"
T10M	4"	3	350 MCM	328	1	24	18.125"	5.5625"	7.203"

THREADED T TYPE - HOT DIP GALVANIZED



T1MHDG

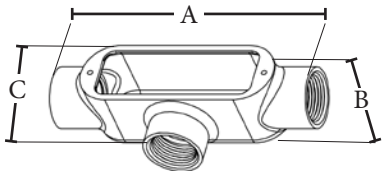

Conforms to finish thickness ASTM A123/123M

FEATURES
- Hot dip galvanized finish provides superior protection against severe environmental factors

APPLICATIONS
- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514A and UL 514D
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
T1MHDG	1/2"	---	---	4	10	9	5.35"	1.31"	2.02"
T2MHDG	3/4"	3	6 AWG	7	10	11	6"	1.62"	2.22"
T3MHDG	1"	3	4 AWG	12	5	8	7.06"	1.88"	2.56"
T4MHDG	1-1/4"	3	2 AWG	33	5	14	7.25"	2.50"	3.50"
T5MHDG	1-1/2"	3	1 AWG	36	2	6	9.25"	2.67"	3.50"
T6MHDG	2"	3	2/0 AWG	76	1	6	11.50"	3.29"	4.25"
T7MHDG	2-1/2"	3	300 MCM	146	1	12	15"	3.94"	5.72"
T8MHDG	3"	3	300 MCM	185	1	15	15.125"	4.75"	8.88"
T9MHDG	3-1/2"	3	350 MCM	300	1	27	18.125"	5.20"	6.81"
T10MHDG	4"	3	350 MCM	330	1	28	18.125"	5.56"	7.20"

RIGID CONDUIT BODIES

THREADED TB TYPE - MALLEABLE IRON



TB1M



FEATURES
- NPT tapered hubs

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated, aluminum enameled


CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
TB1M	1/2"	---	---	5.6	10	10	5.25"	1.9375"	1.9375"
TB2M	3/4"	3	6 AWG	9.5	10	6	6.0625"	1.5625"	1.5625"
TB3M	1"	3	4 AWG	15	5	20	7.125"	1.8125"	1.8125"
TB4M	1-1/4"	3	2 AWG	33	5	19	9.3125"	2.4375"	3.75"
TB5M	1-1/2"	3	1 AWG	36	2	20	9.3125"	2.4375"	3.75"
TB6M	2"	3	2/0 AWG	75	1	13	11.8125"	3.8125"	4.125"

THREADED X TYPE - MALLEABLE IRON



X1M



FEATURES
- NPT tapered hubs

APPLICATIONS
- Provides access to conductors for pulling, splicing and maintenance

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated, aluminum enameled

CERTIFICATIONS
- UL 514A
- Fed. Spec. W-C-586D, A-A-50563
- NEMA FB 1


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
X1M	1/2"	---	---	5.6	10	12	5.25"	2.8125"	1.75"
X2M	3/4"	3	6 AWG	9.5	10	14	6.0625"	2.9375"	2"
X3M	1"	3	4 AWG	15	5	23	7.125"	3.5625"	2.25"
X4M	1-1/4"	3	2 AWG	33	5	20	9.125"	4.4375"	2.5625"
X5M	1-1/2"	3	1 AWG	36	2	22	9.125"	4.4375"	2.75"
X6M	2"	3	2/0 AWG	75	1	16	11.75"	5.375"	3.4375"

RIGID CONDUIT BODIES

LB TYPE - FORM 7



LB1G7

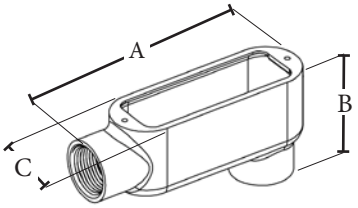

FEATURES

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

APPLICATIONS

- Serves as pull outlet for conductors being installed
- Enables 90° bends in conduit system
- Provides openings for making splices and taps in conductors
- Connects and changes direction of conduit runs
- Provides access to conductors for maintenance and future system changes

STANDARD MATERIAL

- Gray iron

STANDARD FINISH

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids

CERTIFICATIONS

- UL Standard: UL 514A and UL 514D
- Fed. Spec: A-A-50563
- NEMA: FB 1

c UL us


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LB1G7	1/2"	---	---	3.8	10	8	4.50"	1.50"	2.20"
LB2G7	3/4"	3	6 AWG	5.8	10	12	5.20"	1.70"	2.50"
LB3G7	1"	3	4 AWG	9	5	9	6.20"	1.80"	2.90"
LB4G7	1-1/4"	3	2 AWG	17.8	10	25	6.50"	2.20"	3.20"
LB5G7	1-1/2"	3	2 AWG	24.5	10	30	7.10"	2.40"	3.50"
LB6G7	2"	3	1/0 AWG	45	5	24	8.10"	3"	4.10"
LB7G7	2-1/2"	3	3/0 AWG	95.8	1	8	10.70"	4.30"	5.30"
LB8G7	3"	3	3/0 AWG	119	1	10	10.70"	4.30"	6"
LB9G7	3-1/2"	3	300 MCM	208	1	14	12.80"	5.30"	6.60"
LB10G7	4"	3	300 MCM	231	1	17	12.80"	5.30"	7.10"

RIGID CONDUIT BODIES

C TYPE - FORM 7



C1G7

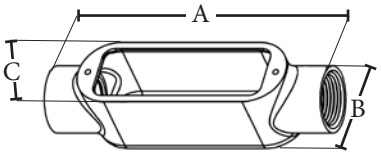

FEATURES
- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

APPLICATIONS
- Serves as pull outlet for conductors being installed

STANDARD MATERIAL
- Gray iron

STANDARD FINISH
- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids


CERTIFICATIONS
- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563
- NEMA: FB 1

PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
C1G7	1/2"	---	---	3.8	10	8	5.30"	1.50"	1.40"
C2G7	3/4"	3	6 AWG	5.8	10	12	6.20"	1.70"	1.70"
C3G7	1"	3	4 AWG	9	5	9	7.30"	1.80"	1.90"
C4G7	1-1/4"	3	2 AWG	17.8	10	27	7.40"	2.20"	2.30"
C5G7	1-1/2"	3	2 AWG	24	10	33	8.20"	2.40"	2.60"
C6G7	2"	3	1/0 AWG	45	5	25	9.10"	3"	3.10"
C7G7	2-1/2"	3	2/0 AWG	95.8	1	10	12.40"	4.30"	3.70"
C8G7	3"	3	2/0 AWG	119	1	13	12.40"	4.30"	4.40"

LL TYPE - FORM 7



LL1G7



FEATURES
- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

APPLICATIONS
- Serves as pull outlet for conductors being installed

STANDARD MATERIAL
- Gray iron

STANDARD FINISH
- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids

CERTIFICATIONS
- UL Standard: UL 514A and UL 514D
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN^3)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LL1G7	1/2"	---	---	3.8	10	8	4.50"	2.30"	1.40"
LL2G7	3/4"	3	6 AWG	5.8	10	12	5.20"	2.50"	1.70"
LL3G7	1"	3	4 AWG	9	5	9	6.20"	2.80"	1.90"
LL4G7	1-1/4"	3	2 AWG	17.8	10	25	6.50"	3.10"	2.30"
LL5G7	1-1/2"	3	2 AWG	24	10	30	7.10"	3.40"	2.60"
LL6G7	2"	3	1/0 AWG	45	5	24	8.10"	4"	3.10"
LL7G7	2-1/2"	3	250 MCM	95.8	1	8	10.70"	5.80"	3.70"
LL8G7	3"	3	250 MCM	119	1	10	10.70"	5.80"	4.40"
LL10G7	4"	3	350 MCM	231	1	17	12.80"	7"	5.40"

RIGID CONDUIT BODIES

LR TYPE - FORM 7



T1G7



FEATURES
- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

APPLICATIONS
- Serves as pull outlet for conductors being installed

STANDARD MATERIAL
- Gray iron

STANDARD FINISH
- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids


CERTIFICATIONS
- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563
- NEMA: FB 1

PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN³)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LR1G7	1/2"	---	---	3.8	10	8	4.50"	2.30"	1.40"
LR2G7	3/4"	3	6 AWG	5.8	10	12	5.20"	2.50"	1.70"
LR3G7	1"	3	4 AWG	9	5	9	6.20"	2.80"	1.90"
LR4G7	1-1/4"	3	2 AWG	17.8	10	25	6.50"	3.10"	2.30"
LR5G7	1-1/2"	3	2 AWG	24	10	30	7.10"	3.40"	2.60"
LR6G7	2"	3	1/0 AWG	45	5	24	8.10"	4"	3.10"
LR7G7	2-1/2"	3	250 MCM	95.8	1	8	10.70"	5.80"	3.70"
LR8G7	3"	3	250 MCM	119	1	10	10.70"	5.80"	4.40"
LR10G7	4"	3	350 MCM	231	1	17	12.80"	7"	5.40"

T TYPE - FORM 7



T1G7

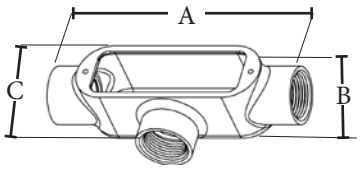

FEATURES
- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

APPLICATIONS
- Serves as pull outlet for conductors being installed

STANDARD MATERIAL
- Gray iron

STANDARD FINISH
- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids

CERTIFICATIONS
- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN³)	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
T1G7	1/2"	---	---	3.8	10	8	5.30"	2.50"	1.80"
T2G7	3/4"	3	6 AWG	5.8	10	13	6.20"	2.70"	2"
T3G7	1"	3	4 AWG	9	5	9	7.30"	3"	2.30"
T4G7	1-1/4"	3	2 AWG	17.8	10	26	7.40"	3.10"	2.30"
T5G7	1-1/2"	3	2 AWG	24	10	32	8.20"	3.40"	2.60"
T6G7	2"	3	1/0 AWG	45	5	25	9.10"	4"	3.10"
T7G7	2-1/2"	3	2/0 AWG	95.8	1	8	12.40"	5.80"	3.70"
T8G7	3"	3	2/0 AWG	119	1	11	12.40"	5.80"	4.40"
T10G7	4"	3	250 MCM	231	1	18	14.50"	7"	5.40"

CONDUIT BODY COVER

FORM 7 LIQUIDTIGHT WITH INTEGRAL GASKET



771GLT



FEATURES

- Domed for extra capacity
- Liquidtight, raintight, oiltight
- Suitable for use in Class I Division 2, Class II Division 1 & 2, Class III Division 1 hazardous locations
- Unique wedge clamp cover design allows easy removal without damaging the conduit body; domed cover design provides additional capacity
- NEMA 3R rated

APPLICATIONS

- Interchangeable with all major brand Form 7 conduit bodies

STANDARD MATERIAL

- Gray iron
- Stainless steel screws
- Silicone gasket

STANDARD FINISH

- Eco-friendly finish with superior corrosion resistant coating
- Exceeds 200 hour salt spray test

CERTIFICATIONS

- UL Standard: UL 514A
- Fed. Spec: A-A-50563
- NEMA: FB 1 NEMA 3R Raintight

c UL us


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	DEPTH
771GLT	1/2"	10	100	36	3.70"	1.30"	.60"
772GLT	3/4"	10	100	38	4.30"	1.60"	.50"
773GLT	1"	5	50	29	5"	1.80"	.60"
774GLT	1-1/4"	---	25	21	5.60"	2.20"	.70"
775GLT	1-1/2"	---	20	21	6.10"	2.40"	.70"
776GLT	2"	---	20	40	7.10"	3"	.70"
777GLT	2-1/2" - 3"	---	10	20	9.10"	4.30"	.80"
779GLT	3-1/2" - 4"	---	10	31	11"	5.30"	.80"

STEEL CONDUIT BODY COVER

FORM 7 WITH INTEGRAL GASKET



771S



FEATURES
- Domed for extra capacity
- Cover screws help prevent water from entering the conduit body
- Unique wedge clamp cover design allows easy removal without damaging the conduit body
- NEMA 3R

APPLICATIONS
- Interchangeable with all major brand Form 7 conduit bodies

STANDARD MATERIAL
- Steel cover
- Stainless steel screws
- Silicone gasket

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563
- NEMA: FB 1 NEMA 3R

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	DEPTH
771S	1/2"	10	100	11	3.70"	1.30"	.30"
772S	3/4"	10	100	15	4.30"	1.60"	.30"
773S	1"	5	50	10	5"	1.80"	.30"
774S	1-1/4"	---	25	7	5.60"	2.20"	.30"
775S	1-1/2"	---	20	6	6.10"	2.30"	.30"
776S	2"	---	20	8	7.10"	3"	.30"
777S	2-1/2" – 3"	---	10	9	9.10"	4.30"	.50"
779S	3-1/2" – 4"	---	10	12	11"	5.30"	.50"

EZLB™ SERVICE ENTRANCE CONDUIT BODY

PVC



EZLB200

FEATURES
- Patented 3 piece design allows additional wire volume to maneuver wire into place
- Split boy design eliminates pinch points
- Design allows easy installation and eliminates wire damage
- Includes 2" collar to connect to PVC conduit
- Includes gasket for wet locations

APPLICATIONS
- For ease of installation of Optical Fiber Cables.

STANDARD MATERIAL
- Molded PVC

CERTIFICATIONS
- cULus Listed

PART #	MATERIAL TYPE	SIZE	MASTER QTY.
EZLB200	PVC	2"	2

PVC ELBOWS AND FITTINGS

Southwire PVC Electrical products are easy to install, rust proof, affordable and lightweight. All fittings, Elbows and boxes are suitable for Schedule 40 and 80 PVC conduit. PVC is resistance to water pressure and damage from Salt and other corrosive substances.


Couplings
Adapters
Elbows
Junction Boxes
Straps
Service Entrance Caps
Reducers
Expansion Couplings
Conduit Bodies
Outlet Boxes
Base and Intermediate Spacers


Southwire™
1/2" (16) 90 STD RAD
SCH 80
EXTRA HEAVY WALL

END CAPS



1081



FEATURES
- High tensile and impact strength
- Easy to install slip fit

APPLICATIONS
- Cap off pipe openings; allows access for future expansions or service
- Capping provides a finished look and inhibits damage from moisture and other elements


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1081	1/2"	100	2	1"	1.0625"
1082	3/4"	100	4	1.25"	1.3125"
1083	1"	50	4	1.4375"	1.625"
1084	1-1/4"	25	2	1.50"	2"
1085	1-1/2"	25	3	1.625"	2.25"
1086	2"	50	8	1.75"	2.75"
1087	2-1/2"	25	7	2.125"	3.50"
1088	3"	25	13	2.25"	4"
1089	3-1/2"	25	15	2.3125"	4.625"
1090	4"	25	19	2.50"	5.0625"
1090A	5"	25	12	2.50"	6.125"
1090B	6"	10	19	3.3125"	7.25"

SERVICE ENTRANCE CAPS



1111



FEATURES
- High tensile and impact strength
- Weather resistant

APPLICATIONS
- Installed on a vertical conduit, usually outdoors, to receive open wires from an electrical service line
- Sometimes called a weather head, it prevents rainwater from entering the conduit


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1111	1/2"	10	2	3"	3"
1112	3/4"	10	2	3"	3"
1113	1"	20	4	3.50"	3.50"
1114	1-1/4"	20	10	5.25"	4.25"
1115	1-1/2"	20	20	6.75"	5.75"
1116	2"	5	5	6.75"	5.75"
1117	2-1/2"	5	21	14"	9"
1118	3"	5	19	14"	9"
1119	3-1/2"	5	42	---	---
1120	4"	1	14	17"	13.50"

END BELLS



1121



FEATURES
- High tensile and impact strength
- Protects wiring being pulled through the vault wall

APPLICATIONS
- Use in concrete vault walls to provide a smooth, safe entrance to the conduit outside


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1121	1/2"	100	2	1.25"	.75"
1122	3/4"	100	3	1.50"	1"
1123	1"	50	2	1.75"	1.25"
1124TZ	1-1/4"	50	4	2.125"	1.3125"
1125TZ	1-1/2"	50	5	2.50"	1.5625"
1126TZ	2"	40	5	2.8125"	1.5625"
1127TZ	2-1/2"	30	6	3.375"	1.875"
1128TZ	3"	50	19	4.125"	2.0625"
1129TZ	3-1/2"	50	13	4.625"	2.25"
1130	4"	50	17	5.125"	2.375"
1130A	5"	25	20	6.375"	2.4375"
1130B	6"	15	18	7.375"	2.875"

METER OFFSET



1094



FEATURES
- High tensile and impact strength
- An offset is needed to move the path of the conduit away from a wall into the holes of an electrical meter box

APPLICATIONS
- Use to connect a conduit to a meter box


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1094	1-1/4"	15	3	3.50	1.625"	2"
1096	2"	8	2	3.50	2.3125"	2.1875"

COUPLINGS



1011



FEATURES
- The fitting consist of two female ends with a center stop
- Both pieces of pipe should seat at the stop for proper positioning

APPLICATIONS
- A connector used to join lengths of conduit pipe


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
1011TZ	1/2"	200	6	1.0625"	1.50"	.625"	.875"
1012TZ	3/4"	125	6	1.3125"	1.5625"	.625"	1.062"
1013	1"	70	6	1.625"	2"	1"	1.3125"
1014	1-1/4"	40	5	2"	2.125"	1"	1.6875"
1015	1-1/2"	30	5	2.25"	2.375"	1.125"	1.9375"
1016	2"	40	5	2.6875"	2.4375"	1.25"	2.375"
1017	2-1/2"	20	8	3.25"	3.50"	1.75"	2.875"
1018	3"	40	25	4"	3.875"	1.8125"	3.50"
1019	3-1/2"	30	23	4.125"	4"	1.9375"	4"
1020	4"	20	20	5"	4.1875"	2"	4.50"
1020A	5"	10	15	6.125"	5.375"	2.50"	5.625"
1020B	6"	8	19	7.25"	6.375"	3"	6.625"

FEMALE ADAPTERS



1022



FEATURES
- The fitting consists of two female ends, one end is threaded and the other is solvent weld
- Both ends fit the same diameter conduit

APPLICATIONS
- A connector often used to transition threaded metal conduit to PVC conduit
- Can also be used to join PVC to PVC

STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1021	1/2"	200	6	1"	1.4375"	.6875"
1022	3/4"	125	6	1.25"	1.625"	.6875"
1023	1"	70	5	1.5625"	1.875"	.875"
1024	1-1/4"	40	5	2"	1.9375"	.9375"
1025	1-1/2"	30	4	2.25"	2.125"	.9375"
1026	2"	40	7	2.6875"	2.125"	.9375"
1027	2-1/2"	20	7	3.3125"	3"	1.3125"
1028	3"	40	22	4"	3.0625"	1.25"
1029	3-1/2"	30	18	4.50"	3"	1.1875"
1030TZ	4"	20	16	5"	3.25"	1.375"
1030A	5"	10	13	7.25"	4.375"	1.625"
1030B	6"	8	15	9.3125"	7"	2.25"


TERMINAL ADAPTERS




1031



1036



1" – 1-1/2"



1/2" – 3/4" &
2" – 6"

FEATURES
- The fitting consists of one solvent weld female end and one threaded male end
- Both ends will fit the same diameter conduit

APPLICATIONS
- A connector used to transition from plain end PVC conduit to a threaded metal or PVC female bell
- Can also be used to connect PVC conduit to a box or other threaded body with the use of a locknut (sold separately)

STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1031	1/2"	200	6	1.0625"	1.6875"	1.125"
1032	3/4"	125	6	1.25"	1.75"	1.1875"
1033	1"	70	5	2.1875"	1.625"	1.50"
1034TZ	1-1/4"	40	4	2"	2.125"	1.3125"
1035TZ	1-1/2"	30	3	2"	2.0625"	1.3125"
1036	2"	40	6	2.6875"	2.1875"	1.375"
1037	2-1/2"	20	7	3.3125"	2.875"	2"
1038	3"	40	18	3.9375"	3"	2.1875"
1039	3-1/2"	30	18	4.50"	3.1875"	2.5625"
1040TZ	4"	20	15	5"	3.4375"	2.5625"
1040A	5"	10	14	6.25"	4.75"	3"
1040B	6"	8	10	7.3125"	4.9375"	2.6875"

POLY PLUGS



1207P

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1206P	2"	70	6
1207P	3"	70	10
1208P	4"	90	20
1209P	5"	45	15
1210P	6"	30	10

FEATURES
- High tensile and impact strength
- Creates tight seal
- Pull tab feature


APPLICATIONS
- Use threaded male end to close end of fitting; allows flexibility for future expansion or configuration changes

STANDARD MATERIAL
- PVC

REDUCERS



1132



FEATURES
- Male and female elements of the bushing are solvent weld
- Flush style; suitable for underground use

APPLICATIONS
- A bushing designed to fit into a bell end or female fitting to reduce from one diameter to the next smaller conduit diameter

STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1132	3/4" X 1/2"	100	2	1.05"	1"	.852"
1133	1" X 3/4"	100	4	1.315"	1.18"	1.064"
1134	1-1/4" X 1"	50	4	1.66"	1.42"	1.33"
1135	1-1/2" X 1-1/4"	50	4	1.90"	1.37"	1.677"
1136	2" X 1-1/2"	25	5	2.375"	1.60"	1.918"
1137	2-1/2" X 2"	25	7	2.875"	1.90"	2.393"
1138	3" X 2-1/2"	25	10	3.50"	2.25"	2.89"
1139	4" X 3"	20	11	4.50"	2.60"	3.515"
1140	4" X 3-1/2"	20	9	4.50"	2.60"	4.015"

BOX ADAPTERS



1211

FEATURES
- Easy installation – the cylinder end protrudes through a hole in the box wall and is solvent welded to a female fitting on the exterior of a box or enclosure

APPLICATIONS
- Adapter can be used with the hub inside a box or enclosure


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1211	1/2"	100	2
1212	3/4"	100	2
1213	1"	100	4
1214	1-1/4"	50	3
1215TZ	1-1/2"	50	3
1216	2"	25	3
1217	2-1/2"	10	2
1218TZ	3"	10	3
1219	3-1/2"	10	4
1220TZ	4"	10	4

TWO HOLE PIPE STRAPS



1061




FEATURES
- Two hole construction enables greater load bearing capacity
- Holes in the feet of the strap for mounting with screws or nails

APPLICATIONS
- A U-shaped conduit support device used to anchor conduit to interior or exterior surfaces
- Designed to handle the extra thickness of PVC conduit systems


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1061	1/2"	300	2	2.1875"	1"	1.6875"
1062	3/4"	200	2	2.50"	1.25"	2"
1063	1"	200	2	2.8125"	1.50"	2"
1064	1-1/4"	200	3	3.125"	1.8125"	2.50"
1065	1-1/2"	200	4	3.375"	2.125"	2.6875"
1066	2"	200	6	4"	2.5625"	3.3125"
1067	2-1/2"	100	7	5.50"	3"	4.5625"
1068	3"	100	8	6"	3.5625"	5.125"
1070	4"	100	9	7"	4.625"	6"

PVC OFFSETS



1101

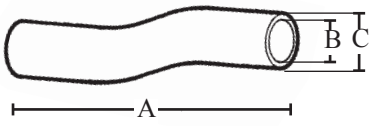

FEATURES
- High tensile and impact strength
- Non-conductive; will not rust or corrode

APPLICATIONS
- Plain end section of conduit enables directional changes around obstacles and compensates for centerline differences in two conduit runs

STANDARD MATERIAL
- PVC


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1101TZ	1/2"	25	3	6.375"	.625"	.875"
1102	3/4"	25	3	6.375"	.75"	1.0625"

Special radius sizes available by request

45° BELL END ELBOWS

SCHEDULE 40 PVC





PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A MIN. RADIUS
1251TZ	1/2"	50	5	4
1252	3/4"	25	4	4.50
1253	1"	25	7	5.75
1254	1-1/4"	25	9	7.25
1255TZ	1-1/2"	20	11	8.25
1256	2"	10	8	9.50
1257	2-1/2"	20	30	10.50
1258	3"	8	20	13
1259	3-1/2"	5	15	15
1260	4"	20	87	16
1260A	5"	1	5	24
1260B	6"	1	7	30

FEATURES

- A section of Schedule 40 PVC conduit which has been heated and bent to enable a 45° directional change in a conduit run
- A standard conduit bell is formed on one end while the other end is a spigot (plain) end
- Both ends are solvent weld

APPLICATIONS

- Can be used above ground or buried; suitable for use in concrete encasement


STANDARD MATERIAL

- Schedule 40 PVC

90° BELL END ELBOWS

SCHEDULE 40 PVC





PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A MIN. RADIUS
1241TZ	1/2"	50	7	4
1242	3/4"	35	8	4.50
1243	1"	20	8	5.75
1244	1-1/4"	30	20	7.25
1245TZ	1-1/2"	30	25	8.25
1246TZ	2"	15	27	9.50
1247	2-1/2"	18	41	10.50
1248	3"	14	56	13
1249	3-1/2"	12	64	15
1250	4"	10	70	16
1250A	5"	1	8	24
1250B	6"	1	9	30

FEATURES

- A section of Schedule 40 PVC conduit which has been heated and bent to enable a 90° directional change in a conduit run
- A standard conduit bell is formed on one end while the other end is a spigot (plain) end
- Both ends are solvent weld

APPLICATIONS

- Can be used above ground or buried; suitable for use in concrete encasement


STANDARD MATERIAL

- Schedule 40 PVC

30° PLAIN END ELBOWS

SCHEDULE 40 PVC





PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A MIN. RADIUS
1261	1/2"	50	6	4
1262	3/4"	25	3	4.50
1263	1"	20	4	5.75
1264	1-1/4"	25	7	7.25
1265	1-1/2"	20	9	8.25
1266	2"	10	6	9.50
1267	2-1/2"	20	24	10.50
1268	3"	8	15	13
1269	3-1/2"	5	26	15
1270	4"	20	76	16
1270A	5"	30	131	24
1270B	6"	25	92	30

FEATURES

- A section of Schedule 40 PVC conduit which has been heated and bent to enable a 30° directional change in a conduit run
- Both ends of the bend are spigot (plain) end
- Both ends are solvent weld

APPLICATIONS

- Can be used above ground or buried; suitable for use in concrete encasement


STANDARD MATERIAL

- Schedule 40 PVC

45° PLAIN END ELBOWS

SCHEDULE 40 PVC





PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A MIN. RADIUS
1051TZ	1/2"	50	5	4
1052	3/4"	25	4	4.50
1053	1"	20	5	5.75
1054	1-1/4"	25	10	7.25
1055TZ	1-1/2"	20	11	8.25
1056	2"	10	8	9.50
1057	2-1/2"	20	30	10.50
1058	3"	8	19	13
1059	3-1/2"	5	16	15
1060	4"	20	86	16
1060A	5"	1	7	24
1060B	6"	1	10	30

FEATURES

- Both ends of the bend are spigot (plain) end
- Both ends are solvent weld

APPLICATIONS

- Can be used above ground or buried; suitable for use in concrete encasement


STANDARD MATERIAL

- Schedule 40 PVC

90° PLAIN END ELBOWS

SCHEDULE 40 PVC






FEATURES
- Longer radius than "standard" UL elbows
- Both ends of the bend are spigot (plain) end
- Both ends are solvent weld


APPLICATIONS
- Can be used above ground or buried; suitable for use in concrete encasement

STANDARD MATERIAL
- Schedule 40 PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A MIN. RADIUS
1041TZ	1/2"	50	8	4
1042	3/4"	35	8	4.50
1043TZ	1"	20	8	5.75
1044	1-1/4"	30	20	7.25
1045TZ	1-1/2"	30	25	8.25
1046TZ	2"	15	20	9.50
1047	2-1/2"	18	44	10.50
1048	3"	14	52	13
1049	3-1/2"	12	60	15
1050TZ	4"	10	68	16
1050A	5"	30	376	24
1050B	6"	25	469	30

TWO PIECE EXPANSION COUPLINGS





FEATURES
- Meets NEMA TC 3 Requirements
- Seal is watertight

APPLICATIONS
- For use with Schedule 40 & Schedule 80 PVC conduit
- Compensates for temperature related length changes in exposed applications

STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
1071	1/2"	25	9	.875"	7"	.6875"	8.125"
1072	3/4"	10	4	1.0625"	7"	.875"	8.125"
1073	1"	10	5	1.3125"	7.0625"	1"	8.375"
1074	1-1/4"	5	4	1.6875"	7.625"	1"	9"
1075	1-1/2"	5	5	1.9375"	7.5625"	1.125"	9"
1076	2"	25	33	2.375"	7.6875"	1.1875"	9.25"
1077	2-1/2"	12	43	2.875"	1'	1.875"	1' & 2.9375"
1078	3"	12	39	3.50"	1'	1.875"	1' & 2.3125"
1079	3-1/2"	9	49	4"	1' & .375"	2"	1' & 2.875"
1080	4"	6	29	4.50"	1' & .3125"	2.125"	1' & 2.875"

CONDUIT BODIES


LB TYPE



1141



1147



FEATURES

- Lightweight; enables easy installation in small areas
- Rectangular shaped conduit body with a removable cover
- One entrance hub at the opposite end in the back (floor)

APPLICATIONS

- Use for a change of direction of the conduit run with the back hub usually exiting through a wall

STANDARD MATERIAL


- PVC
- Screws - Zinc plated steel

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1141	1/2"	25	5	4.1875"	1.4375"	1.3125"
1142	3/4"	15	4	4.9375"	1.625"	1.50"
1143	1"	10	4	5.875"	2"	1.75"
1144	1-1/4"	10	8	7.5625"	2.375"	2.50"
1145	1-1/2"	10	9	8.5625"	2.75"	2.625"
1146	2"	5	8	9.8125"	3.375"	3.125"
1147	2-1/2"	5	24	1' 3"	4.5625"	4.625"
1148	3"	5	25	1' 3.0625"	4.5625"	4.625"
1149	3-1/2"	4	26	1' 4.1875"	5.50"	5.625"
1150	4"	4	26	1' 4.1875"	5.50"	5.625"


C TYPE



1181



1187



FEATURES

- Rectangular shaped conduit body with a removable cover
- Conduit body contains two conduit hubs, one in each end wall

APPLICATIONS

- Use as a connector in straight line installations that allow access for wire pulling and limited wire splices as approved by the National Electrical Code (NEC)

STANDARD MATERIAL

- PVC
- Screws - Zinc plated steel

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
1181	1/2"	25	5	4"	1.50"	1.3125"	4.625"
1182	3/4"	15	4	4.625"	1.6875"	1.50"	5.375"
1183	1"	10	4	5.375"	2"	1.75"	6.5625"
1184	1-1/4"	10	7	7.1875"	2.50"	2.50"	8.1875"
1185	1-1/2"	10	10	8"	2.8125"	2.625"	9.25"
1186	2"	5	8	9.50"	3.375"	3.125"	10.375"
1187	2-1/2"	5	22	1' .875"	4.625"	4.625"	1' 7"
1188	3"	5	26	1' .875"	4.625"	4.625"	1' 7"
1189	3-1/2"	4	15	1' 1.75"	5.5625"	5.5625"	1' 8.375"
1190	4"	4	30	1' 1.875"	5.5625"	5.5625"	1' 8.1875"

CONDUIT BODIES


LL TYPE



1151



1157



FEATURES

- Rectangular shaped conduit body with a removable cover
- Conduit body contains two conduit hubs
- Facing the cover side with the end wall hub pointing up, the second hub is in the left side wall at the opposite end of the fitting

APPLICATIONS

- Use for a 90° change of direction of the conduit run

STANDARD MATERIAL

- PVC
- Screws - Zinc plated steel

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
1151	1/2"	25	5	4.25"	1.4375"	1.3125"	4"
1152	3/4"	15	4	4.9375"	1.625"	1.50"	4.625"
1153	1"	10	4	6"	2"	1.75"	5.375"
1154	1-1/4"	10	8	7.625"	2.4375"	2.4375"	7.1875"
1155	1-1/2"	10	10	8.5625"	2.8125"	2.625"	8"
1156	2"	5	8	9.875"	3.4375"	3.0625"	9.50"
1157	2-1/2"	5	25	1' 2.9375"	4.625"	4.625"	1' .75"
1158	3"	5	27	1' 3"	4.625"	4.625"	1' .8125"
1159	3-1/2"	4	30	1' 4.1875"	5.50"	5.625"	1' .8125"
1160	4"	4	29	1' 3.9375"	5.50"	5.625"	1' .8125"


LR TYPE



1161



1170TZ



FEATURES

- Rectangular shaped conduit body with a removable cover
- Conduit body contains two conduit hubs
- Facing the cover side with the end wall hub pointing up, the second hub is in the right side wall at the opposite end of the fitting

APPLICATIONS

- Use for a 90° change of direction of the conduit run

STANDARD MATERIAL

- PVC
- Screws - Zinc plated steel


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
1161	1/2"	25	5	4"	1.4375"	1.3125"	4.25"
1162	3/4"	15	4	4.625"	1.625"	1.50"	4.9375"
1163	1"	10	4	5.375"	2"	1.75"	6"
1164	1-1/4"	10	8	7.1875"	2.4375"	2.4375"	7.625"
1165	1-1/2"	10	10	8"	2.8125"	2.625"	8.5625"
1166	2"	5	8	9.50"	3.4375"	3.0625"	9.875"
1167	2-1/2"	5	25	1' .75"	4.625"	4.625"	1' 2.9375"
1168	3"	5	27	1' .8125"	4.625"	4.625"	1' 3"
1169	3-1/2"	4	29	1' .8125"	5.50"	5.625"	1' 3.9375"
1170TZ	4"	4	30	1' .8125"	5.50"	5.625"	1' 4.1875"

CONDUIT BODIES


T TYPE



1171TZ



1178TZ



FEATURES

- Rectangular shaped conduit body with a removable cover
- Conduit body contains three conduit hubs, one in each end wall and one at 90° in the middle of the side wall

APPLICATIONS

- Allows 3-way inline access in conduit systems

STANDARD MATERIAL


- PVC
- Screws - Zinc plated steel

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
1171TZ	1/2"	25	5	4"	1.50"	1.3125"	4.625"
1172TZ	3/4"	15	4	4.625"	1.6875"	1.50"	5.375"
1173TZ	1"	10	4	5.375"	2"	1.75"	6.5625"
1174TZ	1-1/4"	10	8	7.1875"	2.50"	2.50"	8.1875"
1175TZ	1-1/2"	10	10	8"	2.8125"	2.625"	9.25"
1176TZ	2"	5	8	9.50"	3.375"	3.125"	10.375"
1177TZ	2-1/2"	2	12	1' .875"	4.625"	4.625"	1' 7"
1178TZ	3"	2	7	1' .875"	4.625"	4.625"	1' 7"
1179TZ	3-1/2"	1	9	1' 1.75"	5.5625"	5.5625"	1' 8.375"
1180	4"	1	9	1' 1.875"	5.5625"	5.5625"	1' 8.1875"


E TYPE



1191



1197TZ



FEATURES

- Rectangular shaped conduit body with a removable cover and one hub
- Conduit body contains one conduit hub for solvent cementing

APPLICATIONS

- Stackable to most oblong bodies without cutting into existing system
- Use as a terminator body at the end of a conduit run

STANDARD MATERIAL

- PVC
- Screws - Zinc plated steel

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
1191	1/2"	25	5	4"	1.4375"	1.3125"	4.25"
1192	3/4"	15	4	4.625"	1.625"	1.50"	4.9375"
1193	1"	10	4	5.375"	2"	1.75"	6"
1194	1-1/4"	10	8	7.1875"	2.4375"	2.4375"	7.625"
1195	1-1/2"	10	9	8"	2.8125"	2.625"	8.5625"
1196TZ	2"	5	8	9.50"	3.4375"	3.0625"	9.875"
1197TZ	2-1/2"	5	20	1' .75"	4.625"	4.625"	1' 2.9375"
1198	3"	5	22	1' .8125"	4.625"	4.625"	1' 3"
1199	3-1/2"	4	21	1' .8125"	5.50"	5.625"	1' 4.1875"
1199A	4"	4	27	1' .8125"	5.50"	5.625"	1' 3.9375"

EZLB™ SERVICE ENTRANCE CONDUIT BODY

PVC



EZLB200



EZLB200

c UL us LISTED

PART #	SIZE	MASTER QTY.
EZLB200	2"	2

FEATURES
- Patented, 3-piece design provides additional room to maneuver wire into place
- Split boy design eliminates pinch points
- Design allows easy installation and eliminated wire damage
- Includes gasket for wet locations and 2" collar to connect to PVC conduit

APPLICATIONS
- Use for service entrance into a building or structure

STANDARD MATERIAL
- Molded PVC


CERTIFICATIONS
- cULus Listed


PULL ELBOWS

WITH RB BUSHING



1092RB

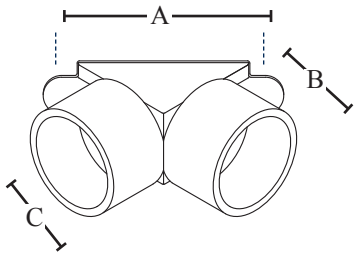



FEATURES
- Meets NEMA TC 3 requirements

APPLICATIONS
- 3/4" PVC Pull Elbow
- Includes two 3/4" x 1/2" reducer bushings
- Enables sharp 90° turns in conduit where wires must be continuously pulled around the turn
- Smooth, defect free interior ensures wires will not be damaged from abrasion
- Not used for wire splices

STANDARD MATERIAL
- PVC
- Gasket - Closed cell rubber
- Screws - Zinc plated steel


CERTIFICATIONS
- UL Listed

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E	F	G	H
1092RB	1/2" – 3/4"	25	8	2.50"	1.625"	1.0625"	.825	1.050	.630	.836	1.00

ROUND JUNCTION BOX



1239



FEATURES
- NEMA 4/4x rated
- A 4" round enclosure with four entrance hubs which can be surface mounted to a wall or ceiling

APPLICATIONS
- Use to terminate a conduit run or join two to four conduits at a common point; allows space for wire splices
- Four screws secure a blank cover and gasket to the box


STANDARD MATERIAL
- PVC
- Screws - Zinc plated steel

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1239	1/2" & 3/4"	15	10	4.0625"	1.875"

JUNCTION BOXES



1221



FEATURES
- NEMA 3 rated where indicated
- A surface mounted enclosure without entrance hubs which allows multiple conduits to be connected and wire splices made within

APPLICATIONS
- Appropriate round hole for conduit entrance must be cut
- Male adapters or box adapters may be used to secure conduit to the box
- May be concrete encased or buried (not warranted or listed to be watertight for all circumstances)

STANDARD MATERIAL
- PVC
- Screws - Zinc plated steel

PART #	INSIDE DIMENSION	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
1221*	4" x 4" x 2"	10	7	4.375"	2.375"	4.375"	4.375"
1222*	4" x 4" x 4"	10	11	4.25"	4.375"	4.25"	4.25"
1223*	4" x 4" x 6"	10	15	4.25"	6.3125"	4.25"	4.25"
1224*	5" x 5" x 2"	10	9	5.25"	2.3125"	5.25"	5.25"
1225TZ*	6" x 6" x 4"	10	23	6.375"	4.375"	6.75"	6.375"
1226*	6" x 6" x 6"	5	14	6.375"	6.3125"	6.6875"	6.375"
1227*	8" x 8" x 4"	5	18	8.50"	4.50"	8.875"	8.50"
1228	8" x 8" x 6"	4	18	8.3125"	6.4375"	9"	8.3125"
1229*	8" x 8" x 7"	4	21	8.75"	7.75"	9"	8.75"
1230TZ*	12" x 12" x 4"	2	14	12.50"	4.4375"	12.875"	12.50"
1231*	12" x 12" x 6"	2	18	12.375"	6.50"	12.875"	12.375"
1232*	16" x 14" x 6"	1	12	16.75"	6.75"	17.125" x 15.125"	14.75"
1233**	24" x 18" x 8"	1	23	24.125"	8.25"	24.25" x 18.75"	18.25"
1234†	24" x 24" x 8"	1	36	24.25"	8.25"	24.1875"	24.25"
1235TZ†	36" x 24" x 8"	1	34	24.25"	8.25"	24.25" x 36.25"	36.25"


* NEMA 3 rated
** UL listed with only a Type 1 NEMA rating
† Not UL listed

DUPLEX BOXES & COVER

SINGLE



1236-1238

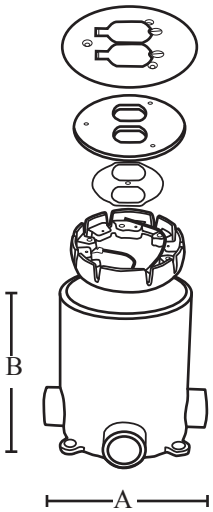

FEATURES

- Round , non-metallic PVC drop in box
- Bronze colored cover
- Includes reducers; corrosion resistant hardware

APPLICATIONS


- Non-multi-functional floor box can be used for power, data, or communications
- Easy trim out
- Accommodates concrete pours of different thickness

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1236	9	18	6.4375"	6"
Floor base box (4)-3/4" hubs, (4)-3/4"-1/2" reducers, level ring & pour cover				
1237	9	17	6.4375"	6"
Floor base box (2)-3/4" hubs, (2)-1" hubs (2)-3/4"-1/2" reducers, level ring & pour cover				
1238	10	3	---	---
PVC-Duplex cover bronze				

SWEDGED REDUCER



1480



FEATURES

- Belled and spigot (plain) end
- Durable, corrosion resistant construction

APPLICATIONS

- Use to reduce diameter from one value to its next smaller conduit diameter
- Meets NEMA TC 3

STANDARD MATERIAL

- PVC


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1480	2-1/2" x 2"	20	20	2.375"	6.625"	2.89"
1481	3" x 2"	25	15	2.375"	7.125"	3.515"
1482	3" x 2-1/2"	25	23	2.875"	7.50"	3.515"
1483	4" x 3"	15	17	3.50"	7.375"	4.515"
1484	5" x 4"	8	20	4.50"	11.625"	5.593"
1485	6" x 5"	4	13	5.563"	11.50"	6.658"

EXPANSION JOINT

METER RISER



1486



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1486	2"	16	31	26.625"	2.375"
1487	2-1/2"	12	51	23.6875"	3.375"
1488	3"	12	46	24"	4"
1490	4"	10	60	25"	5.125"

FEATURES
- Slip fit
- Male and spigot (plain) end

APPLICATIONS
- Expansion joint allow for temperature related expansions and contractions avoiding system damage

STANDARD MATERIAL
- PVC

SEALING WASHER



1372

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1371	1/2"	150	2
1372	3/4"	125	2
1373	1"	100	2
1374	1-1/4"	50	2
1375	1-1/2"	25	2
1376	2"	50	2

FEATURES
- High tensile and impact strength
- Industrial grade


APPLICATIONS
- Use with terminal adapters for concrete tight connection

STANDARD MATERIAL
- PVC

INTERMEDIATE SPACERS



1331

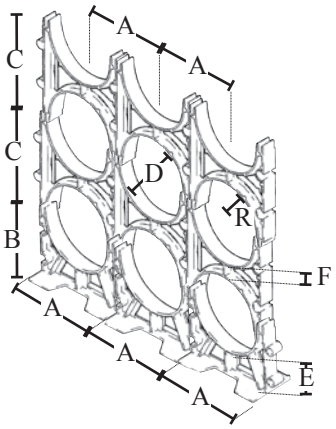

FEATURES

- Resistant to extreme temperature fluctuations
- Available in 16 sizes
- Snap lock design for fast field assembly
- Stays firmly in place during fill
- Heavy duty strut evenly distributes load

APPLICATIONS

- Support duct arrays within trenching before encasement
- For use with Southwire Base Spacer

STANDARD MATERIAL


- High impact polymers

PART #	SPACER SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E	F	R
1331	4 x 1"	200	46	5.63"	4.06"	5.63"	4.63"	3"	1"	2.315"
1332	2 x 1-1/2"	500	50	3.975"	4.25"	3.985"	2.50"	3"	1.50"	1.25"
1333	3 x 1-1/2"	250	35	5.13"	4.81"	5.13"	3.63"	3"	1.50"	1.815"
1334	4 x 1-1/2"	180	49	6.13"	5.315"	6.13"	4.63"	1.75"	1.50"	2.315"
1335	5 x 1-1/2"	140	35	7.325"	5.90"	7.325"	5.69"	3"	1.50"	2.845"
1336	6 x 1-1/2"	100	28	8.23"	6.375"	8.25"	6.75"	3"	1.50"	3.375"
1337	2 x 2"	325	36	4.46"	4.25"	4.46"	2.50"	3"	1.50"	1.25"
1338	3 x 2"	225	35	5.63"	4.81"	5.63"	3.63"	3"	2"	1.815"
1339	4 x 2"	160	37	6.61"	5.315"	6.63"	4.63"	3"	2"	2.315"
1340	5 x 2"	100	36	7.833"	5.90"	7.83"	5.69"	3"	2"	2.845"
1341	6 x 2"	100	31	8.73"	6.375"	8.73"	6.75"	3"	2"	3.375"
1342	2 x 3"	275	39	5.465"	4.255"	5.46"	2.50"	3"	3"	1.25"
1343	3 x 3"	160	30	6.63"	4.81"	6.63"	3.63"	3"	3"	1.815"
1344	4 x 3"	125	33	7.61"	5.315"	7.625"	4.63"	3"	3"	2.315"
1345	5 x 3"	90	28	8.69"	5.90"	8.69"	5.69"	3"	3"	2.845"
1346	6 x 3"	75	26	9.79"	6.375"	9.75"	6.75"	3"	3"	3.375"

BASE SPACERS



1347

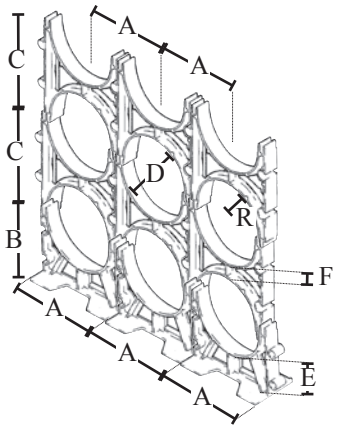

FEATURES

- Proven base plate design maintains consistent vertical separation between trench floor and first duct tier
- Two-piece interlock design eliminates banding
- Resistant to extreme temperature fluctuations
- Available in 16 sizes
- Snap lock design for fast field assembly
- Stays firmly in place during fill
- Heavy duty strut evenly distributes load

APPLICATIONS

- Support duct arrays within trenching before encasement
- For use with Southwire Intermediate Spacers

STANDARD MATERIAL


- High impact polymers

PART #	SPACER SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E	F	R
1347	4 x 1"	250	50	5.63"	4.06"	5.63"	4.63"	3"	1"	2.315"
1348	2 x 1-1/2"	450	65	3.975"	4.25"	3.985"	2.50"	3"	1.50"	1.25"
1349	3 x 1-1/2"	250	48	5.13"	4.81"	5.13"	3.63"	3"	1.50"	1.815"
1350	4 x 1-1/2"	180	47	6.13"	5.315"	6.13"	4.63"	1.75"	1.50"	2.315"
1351	5 x 1-1/2"	140	43	7.325"	5.90"	7.325"	5.69"	3"	1.50"	2.845"
1352	6 X 1-1/2"	100	33	8.23"	6.375"	8.25"	6.75"	3"	1.50"	3.375"
1353	2 x 2"	325	48	4.46"	4.25"	4.46"	2.50"	3"	1.50"	1.25"
1354	3 x 2"	225	44	5.63"	4.81"	5.63"	3.63"	3"	2"	1.815"
1355	4 x 2"	180	47	6.61"	5.315"	6.63"	4.63"	3"	2"	2.315"
1356	5 x 2"	100	32	7.833"	5.90"	7.83"	5.69"	3"	2"	2.845"
1357	6 x 2"	100	34	8.73"	6.375"	8.73"	6.75"	3"	2"	3.375"
1358	2 x 3"	300	48	5.465"	4.255"	5.46"	2.50"	3"	3"	1.25"
1359	3 x 3"	190	41	6.63"	4.81"	6.63"	3.63"	3"	3"	1.815"
1360	4 x 3"	150	43	7.61"	5.315"	7.625"	4.63"	3"	3"	2.315"
1361	5 x 3"	90	30	8.69"	5.90"	8.69"	5.69"	3"	3"	2.845"
1362	6 x 3"	90	32	9.79"	6.375"	9.75"	6.75"	3"	3"	3.375"

ENT COUPLINGS



1491



FEATURES
- Snap in
- Impact resistant
- Concrete tight, requiring no solvent welding or tape around the connections
- Rated for 175 lbs pull out resistance
- Approved for use in noncombustible 2 hour and 4 hour fire-rated floor/ceiling assemblies
- Meets all UL and CSA requirements

APPLICATIONS
- For use with Southwire ENT Flexible Conduit in residential, commercial or institutional applications


STANDARD MATERIAL
- Impact resistant PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1491	1/2"	200	6	1.40"	.86"
1492	3/4"	200	9	2.035"	1.06"
1493TZ	1"	100	6	2.35"	1.33"
1494	1-1/4"	30	4	2.93"	1.69"
1495	1-1/2"	30	3	2.495"	1.93"
1496	2"	20	5	2.35"	2.41"

ENT SLAB BOX WITH CONNECTORS



1637



FEATURES
- Non-conductive, impact and corrosion resistant
- Concrete tight

APPLICATIONS
- Ideal for tough wall poured environments

STANDARD MATERIAL
- PVC


PART #	KNOCKOUTS	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1637	4 x 1/2" & 4 x 3/4"	25	18	4"	2.56"

ENT TERMINAL ADAPTERS

THREADED



1511



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1511	1/2"	200	6	1.045"	.86"
1512	3/4"	200	9	1.105"	1.06"
1513	1"	100	7	1.22"	1.33"
2514	1-1/4"	30	3	2.19"	1.69"
2515	1-1/2"	30	4	1.96"	1.93"
2516TZ	2"	20	5	1.89"	2.40"

FEATURES

- Threaded male end
- Concrete-tight, requiring no solvent welding or tape around the connections
- Unique six locking tab design has a pull-out resistance of up to 175 lbs
- Approved for noncombustible 2 hr. & 4 hr. fire-rated floor/ceiling assemblies
- Impact resistant; rust proof

APPLICATIONS

- Use to join tubing to ENT box or fitting
- For use with other ENT fittings that accept a male thread and locknut


STANDARD MATERIAL

- Impact resistant PVC

SNAP-IN



1611



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1611	1/2"	200	4	1.045"	.86"
1612	3/4"	200	6	1.105"	1.06"
1613	1"	100	5	1.22"	1.33"

FEATURES

- Double snap
- Concrete-tight, requiring no solvent welding or tape around the connections
- Unique six locking tab design has a pull-out resistance of up to 175 lbs
- Approved for noncombustible 2 hr. & 4 hr. fire-rated floor/ceiling assemblies
- Impact resistant; rust proof

APPLICATIONS

- For use with Southwire ENT Flexible Conduit in residential, commercial or institutional applications
- Male and female ends of coupling secure fitting to tubing

STANDARD MATERIAL

- Impact resistant PVC

CONDUIT CEMENT



1327

FEATURES

- Cold weather formula for faster setting
- Medium body, medium set clear cement
- Item number 1364 only, has cold weather formula for faster setting

APPLICATIONS

- For use on duct and conduit PVC pipe
- Secure, long lasting bonds
- Quick curing time

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1327	1/2 PINT	24	15
1328	PINT	12	12
1329	QUART	12	27
1364	QUART - COLD WEATHER	12	27

PVC PRIMER/CLEANER



1328P

FEATURES

- Pint and quart sizes available
- Multi use primer and cleaner

APPLICATIONS

- Removes dirt, oils and other contaminants from the surface of PVC pipes to promote more secure solvent welds

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1328P	PINT	12	12
1329P	QUART	12	23

ENT CONDUIT

COILS



1621

FEATURES

- Electrical Nonmetallic Tubing (ENT) coils
- UV rated
- Suitable for concrete encasement
- Pull resistant
- Fire resistant
- Impact resistant
- Flexible enough to be bent by hand, tough enough to withstand crushing and breaking

APPLICATIONS

- Can be installed and concealed in floors, walls and ceilings
- May be installed and exposed in areas not subject to physical damage and where the building does not exceed three floors above grade

STANDARD MATERIAL

- Heavy duty impact resistant PVC

PART #	SIZE	FEET PER COIL	FEET PER PACK	WEIGHT/ CASE (LBS.)	INNER DIAMETER	OUTER DIAMETER
1621	1/2"	200	400	19	.578"	.84"
1622	3/4"	100	200	13	.778"	1.05"
1623	1"	100	100	17	1"	1.315"

REELS



1622R

FEATURES

- Electrical Nonmetallic Tubing (ENT) reels
- UV rated
- Suitable for concrete encasement
- Pull resistant
- Fire resistant
- Impact resistant
- Flexible enough to be bent by hand, tough enough to withstand crushing and breaking

APPLICATIONS

- Can be installed and concealed in floors, walls, and ceilings
- May be installed and exposed in areas not subject to physical damage and where the building does not exceed three floors above grade

STANDARD MATERIAL

- Heavy duty impact resistant PVC

PART #	SIZE	FEET PER REEL	FEET PER PACK	WEIGHT/ CASE (LBS.)	INNER DIAMETER	OUTER DIAMETER
1621R	1/2"	1500	1500	187	.578"	.84"
1622R	3/4"	1000	1000	167	.778"	1.05"
1623R	1"	750	750	158	1"	1.315"
1624R	1 1/4"	1000	1000	254	1.345"	1.66"
1625R	1 1/2"	750	750	252	1.574"	1.90"
1626R	2"	500	500	240	2.025"	2.375"

PVC RIGID SPECIAL RADIUS ELBOWS

SCHEDULE 40 PVC



FEATURES

- Cleanly finished with plain spigot (plain) ends
- High tensile and impact strength

APPLICATIONS

- Enable connections between straight lengths of pipe; sizes available to accommodate almost any design configuration change

STANDARD MATERIAL

- Schedule 40 PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1377	1" x 90° x 18"	1	1
1378	1" x 90° x 24"	1	1
1379	1" x 90° x 36"	1	1
1380	1" x 90° x 48"	1	2
1381TZ	1" x 45° x 18"	1	1
1382	1" x 45° x 24"	1	1
1383	1" x 45° x 36"	1	1
1384	1" x 45° x 48"	1	1
1385	1" x 30° x 18"	1	1
1386	1" x 30° x 24"	1	1
1387	1" x 30° x 36"	1	1
1388	1" x 30° x 48"	1	2
1389	1-1/4" x 90° x 18"	1	1
1390	1-1/4" x 90° x 24"	1	1
1391	1-1/4" x 90° x 36"	1	1
1392	1-1/4" x 90° x 48"	1	1
1393TZ	1-1/4" x 45° x 18"	1	1
1394	1-1/4" x 45° x 24"	1	1
1395	1-1/4" x 45° x 36"	1	1
1396	1-1/4" x 45° x 48"	1	1
1397	1-1/4" x 30° x 18"	1	1
1398	1-1/4" x 30° x 24"	1	2
1399	1-1/4" x 30° x 36"	1	2
1400TZ	1-1/4" x 30° x 48"	1	2
1402	1-1/2" x 90° x 24"	1	3
1403	1-1/2" x 90° x 36"	1	3
1404	1-1/2" x 90° x 48"	1	3
1405	1-1/2" x 45° x 18"	1	3
1406	1-1/2" x 45° x 24"	1	3
1407	1-1/2" x 45° x 36"	1	3
1408	1-1/2" x 45° x 48"	1	3
1409	1-1/2" x 30° x 18"	1	3
1410	1-1/2" x 30° x 24"	1	3
1411	1-1/2" x 30° x 36"	1	3
1412	1-1/2" x 30° x 48"	1	3

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1413TZ	2" x 90° x 18"	1	1
1414	2" x 90° x 24"	1	1
1415	2" x 90° x 36"	1	2
1416	2" x 90° x 48"	1	2
1417	2" x 45° x 18"	1	2
1418	2" x 45° x 24"	1	2
1419	2" x 45° x 36"	1	2
1420	2" x 45° x 48"	1	2
1421	2" x 30° x 18"	1	2
1422	2" x 30° x 24"	1	2
1423	2" x 30° x 36"	1	3
1424	2" x 30° x 48"	1	3
1425TZ	2-1/2" x 90° x 18"	1	4
1426	2-1/2" x 90° x 24"	1	4
1427	2-1/2" x 90° x 36"	1	5
1428	2-1/2" x 90° x 48"	1	5
1429	2-1/2" x 45° x 18"	1	7
1430	2-1/2" x 45° x 24"	1	1
1431	2-1/2" x 45° x 36"	1	2
1432	2-1/2" x 45° x 48"	1	2
1433	2-1/2" x 30° x 18"	1	2
1434	2-1/2" x 30° x 24"	1	1
1435	2-1/2" x 30° x 36"	1	3
1436	2-1/2" x 30° x 48"	1	1
1437TZ	3" x 90° x 18"	1	2
1438TZ	3" x 90° x 24"	1	1
1439TZ	3" x 90° x 36"	1	2
1440	3" x 90° x 48"	1	2
1441	3" x 45° x 18"	1	4
1442	3" x 45° x 24"	1	5
1443	3" x 45° x 36"	1	6
1444TZ	3" x 45° x 48"	1	7
1445	3" x 30° x 18"	1	8
1446	3" x 30° x 24"	1	8
1447	3" x 30° x 36"	1	9
1448	3" x 30° x 48"	1	9

PVC RIGID SPECIAL RADIUS ELBOWS

SCHEDULE 40 PVC CONTINUED



1449TZ

FEATURES

- Cleanly finished with plain spigot (plain) ends
- High tensile and impact strength

APPLICATIONS

- Enable connections between straight lengths of pipe; sizes available to accommodate almost any design configuration change

STANDARD MATERIAL

- Schedule 40 PVC


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1449TZ	3-1/2" x 90° x 24"	1	4
1450TZ	3-1/2" x 90° x 36"	1	4
1451TZ	3-1/2" x 90° x 48"	1	2
1452	3-1/2" x 45° x 24"	1	5
1453TZ	3-1/2" x 45° x 36"	1	3
1454	3-1/2" x 45° x 48"	1	4
1455	3-1/2" x 30° x 24"	1	5
1456	3-1/2" x 30° x 36"	1	6
1457	3-1/2" x 30° x 48"	1	8
1458	4" x 90° x 24"	1	9
1459	4" x 90° x 36"	1	12
1460TZ	4" x 90° x 48"	1	11
1461TZ	4" x 45° x 24"	1	15
1462	4 x 45 x 36	1	3
1463	4" x 45° x 48"	1	4
1464	4" x 30° x 24"	1	5
1465	4" x 30° x 36"	1	7
1466	4" x 30° x 48"	1	3
1467	5" x 90° x 36"	1	3
1468	5" x 90° x 48"	1	4
1469	5" x 45° x 36"	1	4
1470	5" x 45° x 48"	1	7
1471	5" x 30° x 36"	1	11
1472TZ	5" x 30° x 48"	1	11
1473TZ	6" x 90° x 36"	1	5
1474	6" x 90° x 48"	1	5
1475	6" x 45° x 36"	1	5
1476TZ	6" x 45° x 48"	1	6
1477	6" x 30° x 36"	1	6
1478	6" x 30° x 48"	1	6

45° PLAIN END ELBOWS

SCHEDULE 80 PVC



105180



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A MIN. RADIUS
105180	1/2"	50	7	4"
105280	3/4"	25	5	4.50"
105380	1"	25	9	5.75"
105480	1-1/4"	25	13	7.25"
105580	1-1/2"	25	18	8.25"
105680	2"	10	10	9.50"
105780	2-1/2"	20	39	10.50"
105880	3"	8	25	13"
106080	4"	20	115	16"
1060A80	5"	1	13	24"
1060B80	6"	1	16	30"

FEATURES

- Longer radius than "standard" UL elbows
- Both ends of the bend are spigot (plain) end
- Both ends are solvent weld

APPLICATIONS

- For indoor and outdoor use
- Can be used above ground or buried; suitable for concrete encasement

STANDARD MATERIAL


- Schedule 80 PVC

90° PLAIN END ELBOWS

SCHEDULE 80 PVC



104180



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A MIN. RADIUS
104180	1/2"	50	9	4"
104280	3/4'	35	9	4.50"
104380	1"	20	12	5.75"
104480	1-1/4"	30	24	7.25"
104580	1-1/2"	1	28	8.25"
104680	2"	15	26	9.50"
104780	2-1/2"	18	57	10.50"
104880	3"	10	68	13"
105080	4"	10	92	16"
1050A80	5"	1	9	24"
1050B80	6"	1	11	30"

FEATURES

- Longer radius than "standard" UL elbows
- Both ends of the bend are spigot (plain) end
- Both ends are solvent weld

APPLICATIONS

- For indoor and outdoor use
- Can be used above ground or buried; suitable for concrete encasement

STANDARD MATERIAL

- Schedule 80 PVC

PVC SPECIAL RADIUS ELBOWS

SCHEDULE 80 PVC



141480

FEATURES

- High tensile and impact strength
- Resistant to damage from moisture and corrosive materials
- Industrial strength; superior weather resistant characteristics help rebuff elemental damage

APPLICATIONS

- For indoor, outdoor, above ground and direct burial applications

STANDARD MATERIAL

- Schedule 80 PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
141480	2" x 90° x 24"	1	2
141580	2" x 90° x 36"	1	2
143980	3" x 90° x 36"	1	4
145980	4" x 90° x 36"	1	6
146080	4" x 90° x 48"	1	7
146780	5 x 90° x 36"	1	7
146880	5" x 90° x 48"	1	7
147380	6 x 90° x 36"	1	9

RIGID AND IMC FITTINGS

Southwire Rigid-IMC Electrical fittings are listed for outdoor use and available in malleable iron with HDG finish, grey iron, Zinc, or steel. Rigid threaded, set-screw and compression fittings are available in ½" - 6" and c(UL)us listed. Hot Dip Galvanized Electrical Fittings resist corrosion and provide superior protection from harsh environments. Can be used on infrastructure projects like Bridges, Tunnels, Railways, and other large mass transit projects where approved.

Steel Compression Connectors and Couplings
Malleable Iron Compression Connectors and Couplings
Raintight Compression Connectors and Couplings
Rigid Expansion Couplings
Rigid Watertight Hubs
Rigid Three-Piece Couplings
Rigid Offset Nipples
Locknuts
Insulated Ground Bushings with Lugs
Reducing Washers
Reducing Bushings
Combination Couplings
Cast Device Boxes
Rigid Straps
Clamps Backs




90° PULL ELBOWS

RIGID TO RIGID - ZINC DIE CAST



351



FEATURES
- Removable cover facilitates wire pulling
- Neoprene gasket

APPLICATIONS
- Indoor or outdoor use (Rigid only)
- Use as a wire pulling elbow to facilitate wire pulling through a sharp bend in a run of threaded Rigid or IMC conduit
- Can be used with EMT indoors only

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL Standard 514B
- NEMA FB 1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
351	1/2"	10	100	28	1.31"	1.09"	2.50"	1.78"
352	3/4"	5	50	17	1.43"	1.29"	2.76"	2.13"
353TZ	1"	---	25	16	1.95"	1.59"	3.86"	3.17"
354	1-1/4"	---	20	18	2.26"	1.97"	4.56"	3.25"

90° PULL ELBOWS

RIGID TO BOX - ZINC DIE CAST



361TZ



FEATURES
- Removable cover facilitates wire pulling
- Neoprene gasket

APPLICATIONS
- Indoor or outdoor use (Rigid only)
- Use as a wire pulling elbow to facilitate wire pulling through a sharp bend in a run of threaded Rigid or IMC conduit
- Can be used with EMT indoors only

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL Standard 514B
- NEMA FB 1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
361TZ	1/2"	10	100	31	1.31"	1.09"	2.40"	1.80"
362TZ	3/4"	5	50	18	1.47"	1.29"	2.66"	2.14"
363TZ	1"	---	25	21	2.80"	1.60"	3.66"	3.16"
364TZ	1-1/4"	---	20	25	3.13"	1.96"	5.16"	3.24"

90° PULL ELBOWS

RIGID AND EMT COMBO



352SS



FEATURES
- Removable cover facilitates wire pulling
- Neoprene gasket

APPLICATIONS
- Indoor or outdoor use (Rigid only)
- Use as a wire pulling elbow to facilitate wire pulling through a sharp bend in a run of threaded Rigid or IMC conduit
- Can be used with EMT indoors only

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- UL Standard 514B
- NEMA FB 1

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
351SS	1/2"	10	100	28	1.31"	1.09"	2.50"	1.78"
352SS	3/4"	5	50	17	1.43"	1.29"	2.76"	2.13"
353SS	1"	---	25	16	1.95"	1.59"	3.86"	3.17"
354SS	1-1/4"	---	20	18	2.26"	1.97"	4.56"	3.25"

RIGID AND EMT COMBO TO BOX



361SS



FEATURES
- Rigid and EMT combo to box pull elbows
- Removable cover facilitates wire pulling
- Neoprene gasket

APPLICATIONS
- Indoor or outdoor use
- Use to connect a run of threaded Rigid or IMC conduit to an outlet box or other metal enclosure
- Can be used with EMT indoors only

STANDARD MATERIAL
- Zinc die cast


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
361SS	1/2"	10	100	31	1.31"	1.09"	2.40"	1.80"
362SS	3/4"	5	50	18	1.47"	1.29"	2.66"	2.14"
363SS	1"	---	25	21	2.80"	1.60"	3.66"	3.16"
364SS	1-1/4"	---	20	25	3.13"	1.96"	5.16"	3.24"

RIGID & EMT CONNECTORS

SET SCREW TYPE - ZINC DIE CAST



637



FEATURES
- Set screw type connectors
- Concrete tight when taped
- Assembled with a die cast locknut

APPLICATIONS
- Use to join Rigid or EMT to box or enclosure

STANDARD MATERIAL
- Zinc die cast

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
637*	2-1/2"	12	10	3.22"	2.93"
638*	3"	12	12	3.92"	2.96"
639*	3-1/2"	10	13	4.44"	3.43"
640*	4"	6	9	4.96"	3.60"


* EMT and Rigid

2 Screw

SET SCREW TYPE WITH INSULATED THROAT - ZINC DIE CAST



637I



FEATURES
- Set screw type connectors
- Concrete tight when taped
- Assembled with a die cast locknut

APPLICATIONS
- Use to join Rigid or EMT to box or enclosure

STANDARD MATERIAL
- Zinc die cast

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
637I*	2-1/2"	12	10	3.22"	2.93"
638I*	3"	12	12	3.92"	2.96"
639I*	3-1/2"	10	13	4.44"	3.43"
640I*	4"	6	8	4.96"	3.60"

* EMT and Rigid


2 Screw

RIGID CONNECTORS

SET SCREW TYPE - ZINC DIE CAST



671



FEATURES
- Set screw type connector
- Threadless
- Concrete tight when taped
- Assembled with a die cast locknut

APPLICATIONS
- Use to join Rigid to box or enclosure


STANDARD MATERIAL
- Zinc die cast

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
671	1/2"	50	500	47	1.16"	.40"
672	3/4"	25	250	33	1.39"	.40"

SET SCREW TYPE - MALLEABLE IRON



671S



FEATURES
- Set screw type connector
- Threadless
- Concrete tight when taped
- Assembled with a die cast locknut

APPLICATIONS
- Indoor use
- Use to join threadless Rigid or IMC conduit to a steel outlet box or other metal enclosure

STANDARD MATERIAL
- Malleable iron
- Steel locknut
- Steel hex screw

STANDARD FINISH
- Zinc plated

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
671S	1/2"	---	25	51	1.125"	1.125"
672S	3/4"	---	25	22	1.25"	1.375"
673S	1"	---	25	27	1.50"	1.625"
674S	1-1/4"	5	50	33	1.75"	2"
675S	1-1/2"	5	50	44	1.875"	2.25"
676S	2"	---	20	20	2"	2.75"

RIGID CONNECTORS


SET SCREW TYPE - STEEL



637S



640SA



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
637S*	2-1/2"	12	17	3.813"	4.188"	.938"
638S*	3"	12	22	3.938"	4.688"	.938"
639S*	3-1/2"	6	15	4.188"	5.188"	1"
640S*	4"	6	17	3.75"	4.99"	1.05"
640SA**	5"	1	8	4.74"	6.26"	---
640SB**	6"	1	10	4.85"	7.37"	---

*EMT and Rigid ** Malleable iron

2 screw

FEATURES
- Set screw type connector
- Concrete tight when taped
- Assembled with a steel locknut
- 2-1/2"-4" available with insulated throat

APPLICATIONS
- Use to join Rigid or EMT to box or enclosure

STANDARD MATERIAL
- Steel
- Malleable iron


STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

SET SCREW TYPE WITH INSULATED THROAT - STEEL



637SI



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
637SI*	2-1/2"	12	17	3.813"	4.188"	.938"
638SI*	3"	12	22	3.938"	4.688"	.938"
639SI*	3-1/2"	6	15	4.188"	5.188"	1"
640SI*	4"	6	17	3.75"	4.99"	1.05"

* EMT and Rigid

2 screw

FEATURES
- Set screw type connector
- Insulated throat
- Concrete tight when taped
- Assembled with a steel locknut

APPLICATIONS
- Use to join EMT to box or enclosure

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

RIGID COUPLINGS


SET SCREW TYPE



647S



650SA



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
647S*	2-1/2"	---	12	19	4.25"	3.19"
648S*	3"	---	12	26	4.50"	3.19"
649S*	3-1/2"	---	6	15	4.75"	4.31"
650S*	4"	---	6	17	5"	4.81"
650SA**	5"	---	1	11	6.11"	6.26"
650SB**	6"	---	1	14	6.26"	7.37"

* EMT and Rigid ** Malleable iron

FEATURES
- Set screw type couplings
- Concrete tight when taped

APPLICATIONS
- Use to join two unthreaded lengths of EMT, Rigid conduit or IMC

STANDARD MATERIAL
- Steel
- Malleable iron

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

RIGID SET SCREW CONDUIT CLOSURE CAPS

STEEL



CAPR50

SOUTHWIRE EXCLUSIVE

PART #	SIZE	MASTER QTY.
CAPR50	1/2"	50
CAPR75	3/4"	50
CAPR100	1"	25
CAPR125	1-1/4"	25
CAPR150	1-1/2"	10
CAPR200	2"	10

FEATURES
- Caps seal out rocks, dirt, debris, and anything vandals may use to clog the conduits that are set on the job site waiting for wire pulls
- One -piece quick set screw design does not require any taping and will not distort pipe threads

APPLICATIONS
- Vandal resistant pipe caps are used to protect Rigid/IMC conduit runs that have been stubbed up and temporarily set in place or cap abandoned pipes

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc plated

RIGID COUPLINGS

SET SCREW TYPE - MALLEABLE IRON



681S



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
681S	1/2"	---	25	7	1.50"	1.125"
682S	3/4"	---	25	10	1.50"	1.375"
683S	1"	---	25	16	1.875"	1.625"
684S	1-1/4"	5	50	40	2.1875"	2"
685S	1-1/2"	4	40	42	2.625"	2.25"
686S	2"	---	20	29	2.75"	2.75"

FEATURES
- Set screw type coupling
- Threadless
- Set screw design ensures secure connection
- Maintains conduit in a fixed position
- Excellent corrosion protection in damp locations

APPLICATIONS
- Use to join two unthreaded lengths of Rigid conduit or IMC


STANDARD MATERIAL
- Malleable iron

CERTIFICATIONS
- UL Standard: UL 514B
- RoHS
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1

SET SCREW TYPE - HOT DIP GALVANIZED - MALLEABLE IRON



681MHDG



Conforms to finish thickness ASTM A123/123M

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
681MHDG	1/2"	---	25	7	1.77"	1.17"
682MHDG	3/4"	---	25	10	1.96"	1.39"
683MHDG	1"	---	25	16	2.69"	1.66"
684MHDG	1-1/4"	5	50	41	2.73"	2.01
685MHDG	1-1/2"	4	40	42	3.19"	2.25"
686MHDG	2"	---	20	28	3.40"	2.75"

FEATURES
- Set screw type coupling
- Concrete tight when taped
- Hot dip galvanized for added durability and corrosion protection

APPLICATIONS
- Use to join two unthreaded lengths of Rigid conduit or IMC

STANDARD MATERIAL
- Malleable iron
- Galvanized steel screw

STANDARD FINISH
- Hot dip galvanized


CERTIFICATIONS
- UL Standard: UL 514B
- RoHS
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1

RIGID CONNECTORS

COMPRESSION TYPE - STEEL



262



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
261	1/2"	20	200	26	1.35"	1.17"
262	3/4"	10	100	20	1.48"	1.43"
263	1"	5	50	18	1.58"	1.75"
264	1-1/4"	5	50	32	1.86"	2.15"
265TZ	1-1/2"	---	12	11	1.94"	2.38"
266TZ	2"	---	12	14	2.49"	3.38"

FEATURES
- Compression type connector
- Threadless
- Concrete tight

APPLICATIONS
- Dry location only
- Use to join unthreaded Rigid or IMC conduit to steel outlet box or metal enclosure

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

COMPRESSION TYPE WITH INSULATED THROAT - STEEL



262I



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
261I	1/2"	20	200	26	1.35"	1.17"
262I	3/4"	10	100	20	1.48"	1.43"
263I	1"	5	50	18	1.58"	1.75"
264I	1-1/4"	5	50	32	1.86"	2.15"
265I	1-1/2"	---	12	11	1.94"	2.38"
266I	2"	---	12	14	2.49"	3.38"

FEATURES
- Compression type connector
- Insulated throat
- Threadless
- Concrete tight

APPLICATIONS
- Use to join unthreaded Rigid or IMC conduit to steel outlet box or metal enclosure


STANDARD MATERIAL
- Steel

RIGID CONNECTORS

COMPRESSION TYPE - MALLEABLE IRON



261M



FEATURES
- Compression type connector
- Threadless
- Concrete tight

APPLICATIONS
- Dry location only
- Use to join unthreaded Rigid or IMC conduit to steel outlet box or metal enclosure

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
261M	1/2"	20	200	13	1.50"	1.50"
262M	3/4"	10	100	20	1.50"	1.63"
263M	1"	5	50	36	1.687"	2"
264M	1-1/4"	5	50	64	2"	2.38"
265M	1-1/2"	---	12	92	2.0625"	2.63"
266M	2"	---	12	117	2.25"	3.31"
267TZ	2-1/2"	---	5	14	3"	3.75"
268TZ	3"	---	3	13	3.125"	4.25"
269TZ	3-1/2"	---	2	13	3.187"	4.75"
270	4"	---	2	13	3.437"	5.312"
270A	5"	----	1	7	4.72"	6.86"
270B	6"	---	1	8	5.04"	8.14"

COMPRESSION TYPE WITH INSULATED THROAT - MALLEABLE IRON



267I



FEATURES
- Compression type connector
- Insulated throat
- Threadless
- Concrete tight

APPLICATIONS
- Use to join unthreaded Rigid or IMC conduit to steel outlet box or metal enclosure

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
267I	2-1/2"	5	14	3"	3.75"
268I	3"	3	13	3.125"	4.25"
269I	3-1/2"	2	13	3.187"	4.75"
270I	4"	2	13	3.437"	5.312"

RIGID COUPLINGS

COMPRESSION TYPE - STEEL



251TZ



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
251TZ	1/2"	10	100	16	1.74"	1.17"
252TZ	3/4"	10	100	24	1.82"	1.43"
253	1"	5	50	24	1.95"	1.75"
254	1-1/4"	5	50	43	2.65"	2.15"
255	1-1/2"	---	12	15	2.70"	2.37"
256	2"	---	5	8	2.93"	3.38"

FEATURES
- Compression type coupling
- Threadless
- Concrete tight

APPLICATIONS
- Dry location only
- Use to join two lengths unthreaded Rigid or IMC conduit

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014

COMPRESSION TYPE - MALLEABLE IRON



251M



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
251M	1/2"	10	100	16	1.81"	1.50"
252M	3/4"	10	100	24	1.87"	1.62"
253M	1"	5	50	48	2.18"	2"
254M	1-1/4"	5	50	86	2.62"	2.37"
255M	1-1/2"	---	12	125	2.68"	2.62"
256M	2"	---	5	160	3"	3.31"
257TZ	2-1/2"	---	5	260	5.75"	3.93"
258TZ	3"	---	3	300	5.72"	4.66"
259	3-1/2"	---	2	350	6"	5.20"
260TZ	4"	---	2	400	6.81"	5.75"
260A	5"	---	1	9	6.86"	6.10"
260B	6"	---	1	12	8.14"	6.81"

FEATURES
- Compression type coupling
- Threadless
- Concrete tight
- Suitable for use with UL 6 Rigid Conduit

APPLICATIONS
- Dry location only
- Use to join two lengths unthreaded Rigid or IMC conduit

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014

RIGID RAINTIGHT CONNECTORS

COMPRESSION TYPE WITH INUSLATED THROAT - STEEL



261SIRT



FEATURES
- Raintight
- Compression type connector
- Insulated throat
- Threadless
- Suitable for use with UL 6 Rigid Conduit
- For use with steel conduit
- EZ slip-on labor saving design
- No disassembly required

APPLICATIONS
- Use to join unthreaded Rigid or IMC conduit to steel outlet box or metal enclosure

STANDARD MATERIAL
- Body/Gland Nut: Steel/Zinc plated
- Gasket/Insulator: High performance thermoplastics
- Locknut: Steel/Zinc plated

STANDARD FINISH
- Body/Gland Nut: Steel/Zinc plated
- Gasket/Insulator: High performance thermoplastics
- Locknut: Steel/Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
261SIRT	1/2"	20	200	35	1.62"	1.23"
262SIRT	3/4"	10	100	25	1.69"	1.50"
263SIRT	1"	5	50	20	2"	1.80"
264SIRT	1-1/4"	5	50	39	2.21"	2.21"
265SIRT	1-1/2"	---	12	9	2.28"	2.44"
266SIRT	2"	---	12	12	2.44"	3"

RIGID RAINTIGHT COUPLINGS

COMPRESSION TYPE - STEEL



253SRT



FEATURES
- Raintight
- Compression type couplings
- Threadless
- Suitable for use with UL 6 Rigid Conduit
- For use with steel conduit
- EZ slip-on labor saving design
- No disassembly required

APPLICATIONS
- Use to extend connection by joining rigid conduits with equal size on both sides

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
251SRT	1/2"	10	100	25	2.10"	1.23"
252SRT	3/4"	10	100	35	2.20"	1.50"
253SRT	1"	5	50	25	2.50"	1.80"
254SRT	1-1/4"	5	50	31	3"	2.21"
255SRT	1-1/2"	---	12	11	2.80"	2.44"
256SRT	2"	---	5	7	3.10"	3"

RIGID RAINTIGHT CONNECTORS

COMPRESSION TYPE WITH INSULATED THROAT - MALLEABLE IRON



262MIRT



FEATURES

- Raintight and concrete tight
- Compression type connector
- Insulated throat
- Threadless
- Suitable for use with UL 6 & UL6 A Rigid Conduit
- For use with steel or aluminum conduit
- EZ slip on labor saving design
- No disassembly required

APPLICATIONS

- Use to join unthreaded Rigid or IMC conduit to steel outlet box or metal enclosure

STANDARD MATERIAL

- Malleable iron

STANDARD FINISH

- Zinc plated


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
261MIRT	1/2"	20	200	45	1.45"	1.74"
262MIRT	3/4"	10	100	28	1.68"	1.87"
263MIRT	1"	5	50	34	1.93"	2.13"
264MIRT	1-1/4"	5	50	34	2.34"	2.49"
265MIRT	1-1/2"	---	12	11	2.56"	2.52"
266MIRT	2"	---	12	15	3.14"	2.58"
267MIRT	2-1/2"	---	5	12	3.83"	3.49"
268MIRT	3"	---	3	10	4.46"	3.69"
269MIRT	3-1/2"	---	2	9	5.01"	3.73"
270MIRT	4"	---	2	10	5.53"	3.99"

RIGID RAINTIGHT COUPLINGS

COMPRESSION TYPE - MALLEABLE IRON



251MRT



FEATURES

- Raintight and concrete tight
- Compression type couplings
- Threadless
- Suitable for use with UL 6 & UL6 A Rigid Conduit
- For use with steel or aluminum conduit
- EZ slip on labor saving design
- No disassembly required

APPLICATIONS

- Use to join two lengths unthreaded Rigid or IMC conduit

STANDARD MATERIAL

- Malleable iron

STANDARD FINISH

- Zinc plated


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
251MRT	1/2"	10	100	32	2.16"	1.45"
252MRT	3/4"	10	100	40	2.30"	1.68"
253MRT	1"	5	50	29	2.68"	1.93"
254MRT	1-1/4"	5	50	42	3.02"	2.34"
255MRT	1-1/2"	---	12	13	3.16"	2.56"
256MRT	2"	---	5	9	3.33"	3.14"
257MRT	2-1/2"	---	5	17	4.38"	3.83"
258MRT	3"	---	3	12	4.74"	4.46"
259MRT	3-1/2"	---	2	11	4.86"	5.01"
260MRT	4"	---	2	12	5.29"	5.53"

RIGID EXPANSION COUPLINGS

HOT DIP GALVANIZED



TXJG14HDG



FEATURES

- c(UL)us listed wet locations
- Allows up to 4" of linear movement caused by thermal expansion and contraction (2" in either direction on center)
- Internal grounding design prevents a need for external bonding jumpers and cables
- Designed to prevent conduit from buckling and causing circuit failures
- Hot dip galvanized finish provides superior protection against severe environmental factors
- For use with Rigid UL 6 Conduit

APPLICATIONS

- Weatherproof design is suitable for use on outdoor structures prone to movement like bridges, railroads, and buildings
- Use to join two sections of conduit subjected to longitudinal movement

STANDARD MATERIAL

- Body: Steel
- Reducer: Malleable iron
- Packing: PTFE composite
- Washer & Bushing: Malleable iron
- Gasket: PTFE composite
- Grounding Spring: Beryllium bronze-electrogalvanized

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- UL Standard: UL 514B
- Fed. Spec: WF-408E
- NEMA: FB 1
- ASTM A123/123M


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
TXJG14HDG	1/2"	15	3	6.86"	1.81"
TXJG24HDG	3/4"	10	4	7.14"	2.16"
TXJG34HDG	1"	5	5	7.66"	2.66"
TXJG44HDG	1-1/4"	5	8	7.96"	3.17"
TXJG54HDG	1-1/2"	4	13	8.31"	3.70"
TXJG64HDG	2"	2	20	8.71"	4.43"
TXJG74HDG	2-1/2"	1	27	9.93"	4.93"
TXJG84HDG	3"	1	30	10.01"	5.44"
TXJG94HDG	3-1/2"	1	48	10.44"	6.70"
TXJG104HDG	4"	1	52	10.44"	6.70"

RIGID WATERTIGHT HUBS

INSULATED THROAT - ZINC DIE CAST



203



c UL us

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
201TZ	1/2"	25	250	49	1.31"	1.54"
202	3/4"	10	100	29	1.37"	1.73"
203	1"	10	100	42	1.59"	2.04"
204	1-1/4"	2	20	12	1.59"	2.42"
205	1-1/2"	2	20	15	1.59"	2.79"
206	2"	2	10	9	1.59"	3.30"
207	2-1/2"	---	5	8	2.44"	3.70"
208	3"	---	5	9	2.44"	4.39"
209	3-1/2"	---	5	11	2.44"	4.88"
210	4"	---	1	3	2.44"	5.50"

FEATURES
- Raintight, oiltight, and dust tight
- Flame-retardant insulated throat
- Oversized locknut protects against damage from vibrations and promotes positive grounding

APPLICATIONS
- Indoor or outdoor use
- Use to connect Rigid or IMC conduit to a load center or other metal enclosure where a watertight joint is required at knockouts or slip-fit holes


STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014
- NEMA 2, 3R, 4, 4X, 5, 12, 13

WITH BONDING SCREW - ZINC DIE CAST



201B



c UL us

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	MAX. COPPER WIRE SIZE UL#
201B	1/2"	25	250	53	1.31"	1.54"	#8
202B	3/4"	10	100	30	1.37"	1.73"	#8
203B	1"	10	100	43	1.59"	2.04"	#8
204B	1-1/4"	2	20	12	1.59"	2.42"	#8
205B	1-1/2"	2	20	15	1.59"	2.79"	#8
206B	2"	2	20	10	1.59"	3.30"	#8
207B	2-1/2"	---	2	8	2.44"	3.70"	#6
208B	3"	---	2	10	2.44"	4.39"	#6
209B	3-1/2"	---	1	13	2.44"	4.88"	#6
210B	4"	---	1	15	2.44"	5.50"	#4

FEATURES
- Raintight, oiltight, and dust tight
- Flame-retardant insulated throat
- Oversized locknut protects against damage from vibrations and promotes positive grounding

APPLICATIONS
- Indoor or outdoor use
- Use to connect Rigid or IMC conduit to a load center or other metal enclosure where a watertight joint is required at knockouts or slip-fit holes

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- NEMA 2, 3R, 4, 4X, 5, 12, 13

RIGID WATERTIGHT HUBS

INSULATED THROAT - ALUMINUM



203



FEATURES
- Raintight, oiltight, and dust tight
- Flame-retardant insulated throat
- Oversized locknut protects against damage from vibration and promotes positive grounding

APPLICATIONS
- Indoor or outdoor use
- Use to connect Rigid or IMC conduit to a load center or other metal enclosure where a watertight joint is required at knockouts or slip-fit holes

STANDARD MATERIAL
- Aluminum


CERTIFICATIONS
- NEMA 2, 3R, 4, 4X, 5, 12, 13

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
201AL	1/2"	25	250	22	1.31"	1.54"
202AL	3/4"	10	100	13	1.37"	1.73"
203AL	1"	10	100	18	1.59"	2.04"
204AL	1-1/4"	2	20	5	1.59"	2.42"
205AL	1-1/2"	2	20	7	1.59"	2.79"
206AL	2"	---	10	5	1.59"	3.30"
207AL	2-1/2"	---	5	4	2.44"	3.70"
208AL	3"	---	5	5	2.44"	4.39"
209AL	3-1/2"	---	5	5	2.44"	4.88"
210AL	4"	---	1	2	2.44"	5.50"

WITH BONDING SCREW - ALUMINUM



201BAL



FEATURES
- Raintight, oiltight, and dust tight
- Flame-retardant insulated throat
- Oversized locknut protects against damage from vibrations and promotes positive grounding

APPLICATIONS
- Indoor or outdoor use
- Use to connect Rigid or IMC conduit to a load center or other metal enclosure where a watertight joint is required at knockouts or slip-fit holes

STANDARD MATERIAL
- Aluminum

CERTIFICATIONS
- NEMA 2, 3R, 4, 4X, 5, 12, 13

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	MAX. COPPER WIRE SIZE UL#
201BAL	1/2"	25	250	23	1.31"	1.54"	#8
202BAL	3/4"	10	100	13	1.37"	1.73"	#8
203BAL	1"	10	100	19	1.59"	2.04"	#8
204BAL	1-1/4"	2	20	6	1.59"	2.42"	#8
205BAL	1-1/2"	---	20	7	1.59"	2.79"	#8
206BAL	2"	---	10	6	1.59"	3.30"	#8
207BAL	2-1/2"	---	5	3	2.44"	3.70"	#6
208BAL	3"	---	5	5	2.44"	4.39"	#6
209BAL	3-1/2"	---	5	7	2.44"	4.88"	#6
210BAL	4"	---	1	2	2.44"	5.50"	#4


RIGID WATERTIGHT HUBS

HOT DIP GALVANIZED - MALLEABLE IRON



201MHDG

Conforms to finish thickness
ASTM A123/123M



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
201MHDG	1/2"	25	250	58	1.54"	1.36"	1.09"
202MHDG	3/4"	10	100	34	1.77"	1.50"	1.30"
203MHDG	1"	10	100	52	2.15"	1.77"	1.59"
204MHDG	1-1/4"	2	20	17	2.50"	1.93"	1.94"
205MHDG	1-1/2"	2	20	21	3.01"	1.97"	2.20"
206MHDG	2"	---	10	15	3.35"	2.05"	2.68"
207MHDG	2-1/2"	---	5	14	3.92"	2.76"	3.25"
208MHDG	3"	---	5	19	4.74"	2.99"	3.92"
209MHDG	3-1/2"	---	5	24	5.39"	3.09"	4.46"
210MHDG	4"	---	1	8	5.91"	3.31"	4.82"
210AMHDG	5"	---	1	8	7.36"	3.46"	6.10"
210BMHDG	6"	---	1	11	8.39"	3.62"	7.25"

FEATURES

- Flame-retartdant insulated throat
- Male hub thread-NPT
- Female thread for Rigid conduit and IMC-NPT
- Recessed o-ring assures watertight and dust tight connections
- Type NHUB with insulated throat and bonding locknut is suitable for service entrance applications
- RoHS compliant

APPLICATIONS

- Indoor or outdoor use
- Use to connect Rigid or IMC conduit to a load center or other metal enclosure where a watertight joint is required at knockouts or slip-fit holes

STANDARD MATERIAL

- Malleable iron

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- UL Standard: UL2239
- Fed. Spec: A-A-50553
- NEMA: FB 1
- NEMA 2, 3R, 4, 4X, 5, 12, 13

RIGID WATERTIGHT HUBS

INSULATED - 316 STAINLESS STEEL



WH50-SS

PART #	UNINSULATED OR INSULATED	SIZE	MASTER QTY.
WH50-SS	INSULATED	1/2"	25
WH75-SS		3/4"	10
WH100-SS		1"	10
WH125-SS		1-1/4"	10
WH150-SS		1-1/2"	10
WH200-SS		2"	10
WH250-SS		2-1/2"	5
WH300-SS		3"	5
WH350-SS		3-1/2"	5
WH400-SS		4"	5

FEATURES

- Insuliner

APPLICATIONS

- Secures threaded Rigid/IMC service entrance conduit to a box or enclosure

STANDARD MATERIAL


- 316 stainless steel

RIGID COUPLINGS

THREE PIECE TYPE - MALLEABLE IRON



852



FEATURES
- For threaded Rigid or IMC conduit

APPLICATIONS
- Use as a threaded coupling between lengths of threaded Rigid or IMC conduit

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- RoHS
- Fed. Spec: A-A-50553
- NEMA: FB 1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
851	1/2"	20	200	48	1.43"	1.36"
852	3/4"	10	100	38	1.63"	1.58"
853	1"	5	50	28	1.81"	1.89"
854	1-1/4"	5	50	44	2.19"	2.38"
855	1-1/2"	3	30	38	2.31"	2.83"
856	2"	---	20	37	2.44"	3.29"
857	2-1/2"	---	10	31	2.52"	4.03"
858	3"	---	5	20	2.58"	4.62"
859TZ	3-1/2"	---	5	26	2.65"	5.35"
860	4"	---	2	13	3.42"	5.87"
860A	5"	---	1	8	4.38"	7"
860B	6"	---	1	11	4.38"	8.25"

THREE PIECE TYPE - HOT DIP GALVANIZED - MALLEABLE IRON



851HDG

Conforms to finish thickness ASTM A123/123M



FEATURES
- For threaded Rigid or IMC conduit
- Hot dip galvanized for superior protection against corrosion

APPLICATIONS
- Use to join two lengths of threaded conduit or IMC when neither can be rotated

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514B
- RoHS
- Fed. Spec: A-A-50553
- NEMA: FB 1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
851HDG	1/2"	20	200	24	1.36"	1.31'
852HDG	3/4"	10	100	30	1.41"	1.57"
853HDG	1"	5	50	23	1.62"	1.87"
854HDG	1-1/4"	5	50	55	1.83"	2.28"
855HDG	1-1/2"	3	30	44	1.94"	2.59"
856HDG	2"	2	20	44	2.23"	3.14"
857HDG	2-1/2"	---	10	37	3.09"	3.72"
858HDG	3"	---	5	20	3.19"	4.37"
859HDG	3-1/2"	---	5	28	3.37"	4.90"
860HDG	4"	---	2	18	3.45"	5.44"
860AHDG	5"	---	1	9	4.38"	7"
860BHDG	6"	---	1	11	4.38"	8.25"

RIGID COUPLINGS

THREE PIECE TYPE - STEEL



851S



FEATURES
- For threaded Rigid or IMC conduit

APPLICATIONS
- Use as a threaded coupling between lengths of threaded Rigid or IMC conduit

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- cULus listed

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
851S	1/2"	20	200	20	1.43"	1.36"
852S	3/4"	10	100	30	1.63"	1.58"
853S	1"	5	50	46	1.81"	1.89"
854S	1-1/4"	5	50	110	2.19"	2.38"
855S	1-1/2"	3	30	147	2.31"	2.83"
856S	2"	---	20	220	2.44"	3.29"

RIGID THREADED SPEED NIPPLES

316 STAINLESS STEEL



CHN50-SS

FEATURES
- Corrosion resistant

APPLICATIONS
- Serves as a short raceway between enclosures when used with a locknut (sold separately)

STANDARD MATERIAL
- 316 stainless steel


PART #	UNINSULATED OR INSULATED	SIZE	MASTER QTY.
CHN50-SS	UNINSULATED	1/2"	100
CHN75-SS		3/4"	50
CHN100-SS		1"	25
CHN125-SS		1-1/4"	25
CHN150-SS		1-1/2"	25
CHN200-SS		2"	25
CHN250-SS		2-1/2"	10
CHN300-SS		3"	10
CHN350-SS		3-1/2"	5
CHN400-SS		4"	5

RIGID OFFSET NIPPLES

3/4" OFFSET - ZINC DIE CAST



112



FEATURES
- Enables easier direction change of conduit

APPLICATIONS
- Indoor or outdoor use
- Use as an offset connector between two enclosures
- Offsets the axis of the raceways by 3/4"

STANDARD MATERIAL
- Zinc die cast


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
111	1/2"	10	100	12	2.46"	1"	.75"
112	3/4"	10	100	16	2.56"	1.22"	.75"
113	1"	10	100	22	2.56"	1.525"	.75"
114	1-1/4"	5	50	17	2.91"	1.91"	.75"
115	1-1/2"	5	50	23	3.08"	2.125"	.75"
116	2"	2	20	13	3.145"	2.665"	.75"
117	2-1/2"	---	2	13	3.97"	3.28"	.75"
118	3"	---	2	6	4.42"	3.795"	.75"

3/4" OFFSET - HOT DIP GALVANIZED - MALLEABLE IRON



11MHDG

Conforms to finish thickness
ASTM A123/123M



FEATURES
- NPSM thread: Smooth inside surface to facilitate wire pulling free of damage

APPLICATIONS
- Indoor or outdoor use
- Use as an offset connector between two enclosures
- Offsets the axis of the raceways by 3/4"

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514B
- RoHS
- Fed. Spec: A-A-50553
- NEMA: FB 1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
111MHDG	1/2"	10	100	20	2.81"	1.02"	.75"
112MHDG	3/4"	10	100	29	2.75"	1.25"	.75"
113MHDG	1"	5	50	39	2.87"	1.56"	.75"
114MHDG	1-1/4"	5	50	32	3.13"	2"	.75"
115MHDG	1-1/2"	4	40	40	3.13"	2.31"	.75"
116MHDG	2"	2	20	21	3.06"	2.76"	.75"
117MHDG	2-1/2"	---	2	3	3.97"	3.26"	.75"
118MHDG	3"	---	2	5	4.43"	3.81"	.75"
119MHDG	3-1/2"	---	1	4	4.82"	4.38"	.75"
119AMHDG	4"	---	1	4	5.04"	4.96"	.75"

RIGID CONDUIT NIPPLES

ZINC DIE CAST



752



c UL us

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
751	1/2"	100	1000	29	.68"	1.02"
751A	1/2" X 1" L	---	100	4	1"	1.02"
752	3/4"	50	500	28	.75"	1.29"
752A	3/4" X 1" L	---	50	25	1"	1.29"
753	1"	25	250	20	.87"	1.53"
754	1-1/4"	25	250	30	.94"	1.89"
755	1-1/2"	25	100	18	.91"	2.30"
756	2"	10	40	9	1.07"	2.88"
757	2-1/2"	10	40	15	1.38"	3.39"
758	3"	10	40	19	1.44"	4.06"
759	3-1/2"	10	40	22	1.47"	4.61"
760	4"	5	20	16	1.47"	5.15"

FEATURES
- Corrosion resistant
- Use with locknuts
- Also available with insulated throat

APPLICATIONS
- Serves as a short raceway between enclosures


STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

WITH INSULATED THROAT - ZINC DIE CAST



752I



c UL us

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
751I	1/2"	100	1000	40	.68"	1.02"
752I	3/4"	50	500	30	1"	1.29"
753I	1"	25	250	25	.87"	1.53"
754I	1-1/4"	25	250	35	.94"	1.89"
755I	1-1/2"	25	100	20	.91"	2.30"
756I	2"	10	40	13	1.07"	2.88"
757I	2-1/2"	10	40	17	1.38"	3.39"
758I	3"	10	40	22	1.44"	4.06"
759I	3-1/2"	10	40	27	1.47"	4.61"
760I	4"	5	20	14	1.47"	5.15

FEATURES
- Corrosion resistant
- Use with locknuts
- Insulated throat protects against abrasion damage

APPLICATIONS
- Serves as a short raceway between enclosures

STANDARD MATERIAL
- Zinc die cast


CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

RIGID CONDUIT NIPPLES

MALLEABLE IRON



751M



FEATURES
- Threaded NPSM for Rigid conduit and IMC
- Use with locknuts
- Also available with insulated throat

APPLICATIONS
- Serves as a short raceway between enclosures


STANDARD MATERIAL
- Malleable iron

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
751M	1/2"	100	1000	47	.68"	1.02"
752M	3/4"	50	500	33	.75"	1.29"
753M	1"	25	250	29	.87"	1.53"
754M	1-1/4"	25	250	51	.94"	1.89"
755M	1-1/2"	10	100	27	.91"	2.30"
756M	2"	10	40	14	1.07"	2.88"
757M	2-1/2"	10	40	23	1.38"	3.39"
758M	3"	10	40	7	1.44"	4.06"
759M	3-1/2"	10	40	11	1.47"	4.61"
760M	4"	5	20	27	1.47"	5.15"
760A	5"	---	1	3	2.352"	6"
760B	6"	---	1	4	2.18"	7"

WITH INSULATED THROAT - MALLEABLE IRON



751MI



FEATURES
- Insulated throat protects against abrasion damage
- Threaded NPSM for Rigid conduit and IMC
- Use with locknuts

APPLICATIONS
- Serves as a short raceway between enclosures

STANDARD MATERIAL
- Malleable iron


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
751MI	1/2"	100	1000	48	.68"	1.02"
752MI	3/4"	50	500	7	1"	1.29"
753MI	1"	25	250	30	.87"	1.53"
754MI	1-1/4"	25	250	51	.94"	1.89"
755MI	1-1/2"	10	100	27	.91"	2.30"
756MI	2"	10	40	15	1.07"	2.88"
757MI	2-1/2"	10	40	23	1.38"	3.39"
758MI	3"	10	40	19	1.44"	4.06"
759MI	3-1/2"	10	40	22	1.47"	4.61"
760MI	4"	5	20	28	1.47"	5.15"

SHORT THREADED CHASE COUPLINGS, FOR BETWEEN BOXES MOUNTED ON BRACKETS

STEEL



HC50



FITS ERICO/B-LINE
MULTI-BOX BRACKETS

PART #	SIZE	MASTER QTY.
HC50	1/2"	50
HC75	3/4"	50
HC100	1"	25

FEATURES
- Short threaded couplings perfect length fills the space between boxes mounted on fixed position mounting brackets
- Provides solid support and a secure bond to connectors and boxes
- Smooth interior surface prevents wire damaget

APPLICATIONS
- Short threaded couplings are used with chase nipples to provide short raceways and connections between electrical boxes that are mounted on fixed position mounting brackets

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

RIGID, SPACE SAVER BUSHING

STEEL



BRC-100ST

Southwire SIMFab SOLUTIONS

UL LISTED

PART #	RIGID SIZE	MASTER QTY.
BRC-50ST	1/2"	50
BRC-75ST	3/4"	50
BRC-100ST	1"	25

FEATURES
- Eliminates the need for a locknut
- Plastic Insuliner is rated at 150° C

APPLICATIONS
- Space saving design solves problem of not enough thread left to engage the bushing

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- UL Listed

RIGID CONDUIT BUSHINGS

ZINC DIE CAST



301



FEATURES
- Rounded surface of the bushing prevents damage to wire insulation

APPLICATIONS
- Indoor or outdoor use
- Use with locknut to terminate threaded Rigid or IMC conduit to an outlet box


STANDARD MATERIAL
- Zinc die cast

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
301	1/2"	100	1000	30	1.053"	.37"
302	3/4"	100	1000	50	1.327"	.37"
303	1"	50	500	30	1.584"	.47"
304	1-1/4"	25	250	25	1.952"	.50"
305	1-1/2"	25	250	38	2.201"	.52"
306	2"	25	100	17	2.693"	.52"
307	2-1/2"	10	100	36	3.235"	.85"
308	3"	---	10	5	3.855"	.85"
309TZ	3-1/2"	---	10	6	4.359"	.85"
310	4"	---	10	7	5.011"	.85"

MALLEABLE IRON



301M



FEATURES
- Rounded surface of the bushing prevents damage to wire insulation

APPLICATIONS
- Indoor or outdoor use
- Use with locknut to terminate threaded Rigid or IMC conduit to an outlet box

STANDARD MATERIAL
- Malleable iron


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
301M	1/2"	100	1000	50	1.223"	.48"
302M	3/4"	50	500	30	1.498"	.49"
303M	1"	25	250	24	1.818"	.56"
304M	1-1/4"	25	250	30	2.423"	.61"
305M	1-1/2"	---	25	22	2.512"	.68"
306M	2"	---	25	35	3.053"	.68"
307M	2-1/2"	---	15	20	3.624"	.85"
308M	3"	---	10	10	4.172"	.91"
309M	3-1/2"	---	10	13	4.767"	1"
310M	4"	---	10	20	5.321"	1.06"
310AM	5"	---	10	25	6.15"	1.30"
310BM	6"	---	10	35	7.19"	1.30"

RIGID CAPPED BUSHINGS

STEEL CAP



301CB



FEATURES
- Steel cap is used inside bushing to prevent debris from entering conduit

APPLICATIONS
- Indoor or outdoor use
- Use with locknut to terminate threaded Rigid or IMC conduit to an outlet box

STANDARD MATERIAL
- Zinc die cast with steel cap

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
301CB	1/2"	100	1000	5	1.053"	.37"
302CB	3/4"	100	1000	7	1.327"	.37"
303CB	1"	50	500	11	1.584"	.37"
304CB	1-1/4"	25	250	17	1.952"	.50"
305CB	1-1/2"	25	250	21	2.201"	.52"
306CB	2"	25	100	34	2.693"	.52"
307CB	2-1/2"	10	100	48	3.235"	.85"
308CB	3"	10	100	61	3.855"	.85"
309CB	3-1/2"	---	10	70	4.359"	.85"
310CB	4"	---	10	69	5.011"	.85"
310ACB	5"	---	10	78	6.15"	1.30"
310BCB	6"	---	10	85	7.25"	1.125"


INSULATING PLASTIC BUSHINGS

105°C FLAME RETARDANT



831TZ

c UL us



FEATURES
- Rated flame retardant to 105°C

APPLICATIONS
- Indoor or outdoor use
- Use with locknut to terminate threaded Rigid or IMC conduit to an outlet box

STANDARD MATERIAL
- Thermoplastic


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
831TZ	1/2"	100	1000	5	1.06"	.43"
832TZ	3/4"	100	1000	7	1.31"	.43"
833	1"	50	500	7	1.59"	.48"
834TZ	1-1/4"	25	250	4	1.96"	.56"
835TZ	1-1/2"	25	250	5	2.18"	.56"
836	2"	20	200	6	2.68"	.59"
837TZ	2-1/2"	---	50	2	3.25"	.72"
838	3"	---	25	2	3.87"	.75"
839	3-1/2"	---	25	2	4.37"	.77"
840	4"	---	10	1	5"	.77"
840A	5"	---	10	1	6.25"	1"
840B	6"	---	10	2	7.50"	1"

RIGID BUSHINGS

INSULATED - 105°C THERMOPLASTIC LINER - ZINC



311



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
311	1/2"	100	1000	30	1.053"	.394"
312	3/4"	50	500	20	1.327"	.394"
313	1"	50	500	40	1.584"	.477"
314	1-1/4"	25	250	25	1.952"	.503"
315	1-1/2"	25	250	27	2.201"	.522"
316	2"	10	100	17	2.693"	.564"
317	2-1/2"	---	50	20	3.235"	.866"
318	3"	---	25	12	3.855"	.866"
319	3-1/2"	---	25	14	4.359"	.866"
320	4"	---	10	6	5.011"	.866"

FEATURES
- Liner is rated flame retardant to 105°C

APPLICATIONS
- Indoor or outdoor use
- Use with locknut to terminate Rigid or IMC conduit to an outlet box
- Plastic liner prevents damage to wire insulation


STANDARD MATERIAL
- Zinc
- Plastic insulator

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014

INSULATED - 105°C THERMOPLASTIC LINER - MALLEABLE IRON



311M



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
311M	1/2"	100	1000	20	1.223"	.506"
312M	3/4"	50	500	20	1.498"	.547"
313M	1"	50	500	40	1.818"	.662"
314M	1-1/4"	25	250	43	2.423"	.735"
315M	1-1/2"	25	100	29	2.512"	.808"
316M	2"	10	100	30	3.053"	.808"
317M	2-1/2"	---	50	20	3.624"	.958"
318M	3"	---	25	13	4.172"	1.052"
319M	3-1/2"	---	25	18	4.767"	1.169"
320M	4"	---	10	10	5.321"	1.178"
320AM	5"	---	10	25	6.15"	1.30"
320BM	6"	---	10	35	7.19"	1.30"

FEATURES
- Liner is rated flame retardant to 105°C

APPLICATIONS
- Indoor or outdoor use
- Use with locknut to terminate Rigid or IMC conduit to an outlet box
- Plastic liner prevents damage to wire insulation

STANDARD MATERIAL
- Malleable iron


STANDARD FINISH
- Zinc plated
- Plastic insulator

RIGID BUSHINGS

INSULATED - 105°C THERMOPLASTIC LINER - HOT DIP GALVANIZED



311MHDG



Conforms to finish thickness ASTM A123/123M

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
311MHDG	1/2"	40	400	29	1.08"	.57"
312MHDG	3/4"	40	400	35	1.31"	.57"
313MHDG	1"	25	250	31	1.61"	.65"
314MHDG	1-1/4"	20	200	29	1.91"	.71"
315MHDG	1-1/2"	10	100	23	2.16"	.73"
316MHDG	2"	10	100	25	2.72"	.73"
317MHDG	2-1/2"	5	50	24	3.23"	.94"
318MHDG	3"	---	25	13	3.88"	.94"
319MHDG	3-1/2"	---	10	7	4.43"	.94"
320MHDG	4"	---	10	8	4.89"	.94"

FEATURES
- Liner is rated flame retardant to 105°C

APPLICATIONS
- Indoor or outdoor use
- Use with locknut to terminate Rigid or IMC conduit to an outlet box
- Plastic liner prevents damage to wire insulation

STANDARD MATERIAL
- Malleable iron
- Plastic insulator

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: A-A-50563
- CSA C22.2 No. 18.3
- NEMA: FB 1

RIGID INSULATED BUSHINGS, SPLIT TYPE

POLYPROPYLENE



IBTS-50

PART #	SIZE	MASTER QTY.
IBTS-50	1/2"	50
IBTS-75	3/4"	50
IBTS-100	1"	25

FEATURES
- Snap-on before or after cable pull
- No tools required to install
- Temperature rating of 105° C

APPLICATIONS
- Protects cable jacket from abrasion during installation

STANDARD MATERIAL
- Polypropylene

INSULATED METALLIC GROUNDING BUSHINGS

WITH ALUMINUM LUG - 105°C THERMOPLASTIC LINER - ZINC




321

FEATURES
- Liner is rated flame retardant to 105°C
- UL listed for use with copper or aluminum grounding conductor
- Round surface of bushing prevents damage to wire insulation
- Plastic liner prevents damage to wire insulation

APPLICATIONS
- Indoor or outdoor use
- Use with locknut to terminate service conduit to a cabinet
- Lug provided for bonding jumper to a neutral bus bar

STANDARD MATERIAL
- Body - Zinc/plastic insulator
- Lug - Aluminum
- Clamping screw - Steel
- Set screws - Steel



PART #	SIZE	GROUNDING LUG WIRE SIZE MIN.	GROUNDING LUG WIRE SIZE MAX.	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
321	1/2"	14	4	50	500	25	1.25"	.50"
322TZ	3/4"	14	4	50	500	35	1.50"	.50"
323	1"	14	4	25	250	30	1.75"	.56"
324TZ	1-1/4"	14	4	20	200	34	2.12"	.62"
325	1-1/2"	14	2	10	100	20	2.37"	.75"
326	2"	14	2	10	100	35	2.81"	.75"
327	2-1/2"	14	1/0	--	50	25	3.62"	.93"
328TZ	3"	14	1/0	---	10	6	4.18"	.93"
329	3-1/2"	14	2/0	---	10	7	4.68"	.93"
330	4"	6	250MCM	---	10	8	5.25"	.93"

MALLEABLE IRON




321M

FEATURES
- Liner is rated flame retardant to 105°C
- UL listed for use with copper or aluminum grounding conductor
- Round surface of bushing prevents damage to wire insulation
- Plastic liner prevents damage to wire insulation

APPLICATIONS
- Indoor or outdoor use (aluminum lug)
- Use with locknut to terminate service conduit to a cabinet
- Lug provided for bonding jumper to a neutral bus bar

STANDARD MATERIAL
- Body - Malleable iron
- Plastic insulator
- Lug - Aluminum
- Clamping screw - Steel
- Set screws - Steel




PART #	SIZE	GROUNDING LUG WIRE SIZE MIN.	GROUNDING LUG WIRE SIZE MAX.	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
321M	1/2"	14	4	50	500	25	1.25"	.50"
322M	3/4"	14	4	50	500	30	1.48"	.54"
323M	1"	14	4	25	250	23	1.80"	.65"
324M	1-1/4"	14	4	20	200	34	2.40"	.73"
325M	1-1/2"	14	2	25	250	53	2.50"	.80"
326M	2"	14	2	25	250	78	3.03"	.80"
327M	2-1/2"	14	1/0	---	10	4	3.60"	.95"
328M	3"	14	1/0	---	10	5	4.16"	1.03"
329M	3-1/2"	14	2/0	---	10	15	4.75"	1.15"
330M	4"	14	2/0	---	10	20	5.30"	1.17"
330AM	5"	6	250MCM	---	10	25	6.15"	1.13"
330BM	6"	6	250MCM	---	10	35	7.19"	1.13"

INSULATED METALLIC GROUNDING BUSHINGS

WITH ALUMINUM LAY-IN LUG - MALLEABLE IRON



331M



FEATURES

- Liner is rated flame retardant to 105°C
- UL listed for use with copper or aluminum grounding conductor

APPLICATIONS

- Indoor or outdoor use (aluminum lug)
- Use with locknut to terminate service conduit to a cabinet
- Lug provided for bonding jumper to a neutral bus bar
- Round surface of bushing prevents damage to wire insulation
- Plastic liner prevents damage to wire insulation

STANDARD MATERIAL

- Body - Malleable iron
- Plastic insulator
- Lug - Aluminum
- Clamping screw - Steel
- Set screws - Steel

STANDARD FINISH

- Body - Zinc plated


PART #	SIZE	GROUNDING LUG WIRE SIZE MIN.	GROUNDING LUG WIRE SIZE MAX.	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
331M	1/2"	14	4	50	500	45	1.08"	.57"
332M	3/4"	14	4	50	500	50	1.31"	.57"
333M	1"	14	4	25	250	40	1.61"	.65"
334M	1-1/4"	14	4	20	200	35	1.91"	.71"
334AM	1-1/4"	14	1/0	20	200	35	1.91"	.71"
335M	1-1/2"	14	4	10	100	25	2.16"	.73"
335AM	1-1/2"	14	1/0	10	100	25	2.16"	.73"
336M	2"	14	4	10	100	30	2.72"	.73"
336AM	2"	14	1/0	10	100	30	2.72"	.73"
337M	2-1/2"	14	1/0	---	50	25	3.23"	.94"
337AM	2-1/2"	6	250 MCM	---	50	25	3.23"	.94"
338M	3"	14	1/0	---	25	18	3.88"	.94"
338AM	3"	6	250 MCM	---	25	18	3.88"	.94"
339M	3-1/2"	14	1/0	---	10	20	4.43"	.94"
339AM	3-1/2"	6	250 MCM	---	10	20	4.43"	.94"
340M	4"	14	1/0	---	10	25	4.89"	.94"
340AM	4"	6	250 MCM	---	10	25	4.89"	.94"
340ALM	5"	6	250 MCM	---	10	25	6.10"	1.14"
340BLM	6"	6	250 MCM	---	10	35	7.15"	1.14"

INSULATED METALLIC GROUNDING BUSHINGS

WITH ALUMINUM LAY-IN LUG - HOT DIP GALVANIZED MALLEABLE IRON



331MHDG



FEATURES

- Hot dip galvanized for superior protection against corrosion
- Tin plated aluminum alloy 6061-T6 rated for AL and CU conductor
- Liner is rated flame retardant to 105°C
- UL listed for use with copper or aluminum grounding conductor

APPLICATIONS

- Use to provide a means of grounding Rigid or IMC conduit
- Indoor or outdoor use (aluminum lug)
- Use with locknut to terminate service conduit to a cabinet
- Lug provided for bonding jumper to a neutral bus bar
- Round surface of bushing prevents damage to wire insulation
- Plastic liner prevents damage to wire insulation

STANDARD MATERIAL

- Body - Malleable iron
- Plastic insulator
- Lug - Aluminum
- Clamping screw - Steel
- Set screws - Steel

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- UL Standard: UL 514B and UL 467
- RoHS
- Fed. Spec: A-A-50553
- NEMA: FB 1

Conforms to finish thickness ASTM A123/123M


PART #	SIZE	GROUNDING LUG WIRE SIZE MIN.	GROUNDING LUG WIRE SIZE MAX.	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
331MHDG	1/2"	14	4	50	500	45	1.08"	.57"
332MHDG	3/4"	14	4	50	500	50	1.31"	.57"
333MHDG	1"	14	4	25	250	32	1.61"	.65"
334MHDG	1-1/4"	14	4	20	200	36	1.91"	.71"
335MHDG	1-1/2"	14	4	10	100	25	2.16"	.73"
336MHDG	2"	14	4	10	100	30	2.72"	.73"
337MHDG	2-1/2"	14	1/0	5	50	25	3.23"	.94"
338MHDG	3"	14	1/0	---	25	18	3.88"	.94"
339MHDG	3-1/2"	14	1/0	---	10	20	4.43"	.94"
340MHDG	4"	14	1/0	---	10	24	4.89"	.94"
340ALMHDG	5"	6	250 MCM	---	10	27	6.10"	1.14"
340BLMHDG	6"	6	250 MCM	---	10	32	7.15"	1.14"

INSULATED METALLIC GROUNDING BUSHINGS

WITH COPPER LAY-IN LUG - HOT DIP GALVANIZED



331CMHDG



FEATURES

- Hot dip galvanized for superior protection against corrosion
- Copper lay-in lug
- Liner is rated flame retardant to 105°C
- UL listed for use with copper or aluminum grounding conductor

APPLICATIONS

- Use to provide a means of grounding Rigid or IMC conduit
- Indoor or outdoor use
- Use with locknut to terminate service conduit to a cabinet
- Lug provided for bonding jumper to a neutral bus bar
- Round surface of bushing prevents damage to wire insulation
- Plastic liner prevents damage to wire insulation

STANDARD MATERIAL

- Body - Malleable iron
- Plastic insulator
- Lug - Copper
- Clamping screw - Steel
- Set screws - Steel

STANDARD FINISH

- Body - Hot dip galvanized

CERTIFICATIONS

- UL Standard: UL 514B and UL 467
- RoHS
- Fed. Spec: A-A-50553
- NEMA: FB 1

c UL us

Conforms to finish thickness ASTM A123/123M


PART #	SIZE	GROUNDING LUG WIRE SIZE MIN.	GROUNDING LUG WIRE SIZE MAX.	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
331CMHDG	1/2"	14	4	25	250	32	1.08"	.57"
332CMHDG	3/4"	14	4	25	250	35	1.31"	.57"
333CMHDG	1"	14	4	20	200	35	1.61"	.65"
334CMHDG	1-1/4"	14	4	15	150	30	1.91"	.71"
335CMHDG	1-1/2"	14	4	10	100	28	2.16"	.73"
336CMHDG	2"	14	4	10	100	29	2.72"	.73"
337CMHDG	2-1/2"	14	4	5	50	27	3.23"	.94"
338CMHDG	3"	14	4	---	25	14	3.88"	.94"
339CMHDG	3-1/2"	14	4	---	10	7	4.43"	.94"
340CMHDG	4"	14	4	---	10	8	4.89"	.94"

INSULATED BONDING BUSHINGS

CORROSION RESISTANT - MALLEABLE IRON



332MSL



FEATURES

- Hot dip galvanized for superior protection against corrosion
- Tin plated copper lay-in lug
- UV Resistant liner for direct exposure to the sun
- Stainless steel hardware

APPLICATIONS

- Ideal for solar photovoltaic applications.
- Use to provide a means of grounding Rigid or IMC conduit
- Indoor or outdoor use (lay-in lug)
- Use lug provided for bonding jumper to a neutral bus bar
- Prevent damage to wire insulation with the UV resistant liner

STANDARD MATERIAL

- Body – Malleable iron
- Lug – Tin plated copper
- Clamping screw – Stainless steel
- Set screws – Stainless steel

STANDARD MATERIAL

- Hot dip galvanized


PART #	SIZE	GROUNDING LUG WIRE SIZE MIN.	GROUNDING LUG WIRE SIZE MAX.	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	RECOMMENDED TORQUE (IN - LBS)	A	B
332MSL	3/4"	14	4	10	100	14	35	1.31"	.57"
333MSL	1"	14	4	5	50	9	35	1.61"	.65"
334MSL	1-1/4"	14	4	5	50	10	35	1.91"	.71"
335MSL	1-1/2"	14	4	5	50	12	35	2.16"	.73"
336MSL	2"	14	4	5	50	15	35	2.72"	.73"
334AMSL	1-1/4"	14	2/0	5	50	16	35	1.91"	.71"
335AMSL	1-1/2"	14	2/0	5	50	17	35	2.16"	.73"
336AMSL	2"	14	2/0	5	50	20	35	2.72"	.73"

INSULATED METALLIC GROUNDING BUSHINGS

WITH ALUMINUM LAY-IN LUG - THREADLESS SET SCREW TYPE MALLEABLE IRON



331MSS



FEATURES

- Liner is rated flame retardant to 105°C
- Set-screws allowing the fitting to lock bushing in any desired position
- For use on threaded or threadless Rigid conduit or IMC

APPLICATIONS

- Indoor or outdoor use (lay-in lug)
- Use with locknut to terminate service conduit to a cabinet
- Lug provided for bonding jumper to a neutral bus bar
- Round surface of bushing prevents damage to wire insulation
- Plastic liner prevents damage to wire insulation

STANDARD MATERIAL

- Body - Malleable iron
- Plastic insulator
- Lug - Aluminum
- Clamping screw - Steel
- Set screws - Steel

STANDARD FINISH

- Body - Zinc plated


PART #	SIZE	GROUNDING LUG WIRE SIZE MIN.	GROUNDING LUG WIRE SIZE MAX.	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
331MSS	1/2"	14	4	50	500	25	1.08"	.57"
332MSS	3/4"	14	4	50	500	30	1.31"	.57"
333MSS	1"	14	4	25	250	23	1.61"	.65"
334MSS	1-1/4"	14	4	20	200	30	1.91"	.71"
335MSS	1-1/2"	14	4	10	100	25	2.16"	.73'
336MSS	2"	14	4	10	100	30	2.72"	.73"
337MSS	2-1/2"	14	1/0	5	50	38	3.23"	.94"
338MSS	3"	14	1/0	---	25	35	3.88"	.94"
339MSS	3-1/2"	14	1/0	---	10	15	4.43"	.94"
340MSS	4"	14	1/0	---	10	20	4.89"	.94"
340AMSS	5"	6	250 MCM	---	10	25	6.10"	1.14"
340BMSS	6"	6	250 MCM	---	10	35	7.15"	1.14"

INSULATED METALLIC GROUNDING BUSHINGS

WITH ALUMINUM LAY-IN LUG - ZINC DIE CAST



332



FEATURES

- Tin plated aluminum alloy 6061-T6 rated for AL and CU conductor
- Liner is rated flame retardant to 105°C
- UL listed for use with copper or aluminum grounding conductor

APPLICATIONS

- Use to provide a means of grounding Rigid or IMC conduit
- Indoor or outdoor use (lay-in lug)
- Use with locknut to terminate service conduit to a cabinet
- Lug provided for bonding jumper to a neutral bus bar
- Round surface of bushing prevents damage to wire insulation
- Plastic liner prevents damage to wire insulation

STANDARD MATERIAL

- Body - Zinc die cast
- Plastic insulator
- Lug - Aluminum
- Clamping screw - Steel
- Set screws - Steel


PART #	SIZE	GROUNDING LUG WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
		MIN.	MAX.					
331	1/2"	14	4	50	500	30	1.04"	.38"
332	3/4"	14	4	50	500	35	1.26"	.41"
333	1"	14	4	25	250	23	1.53"	.50"
334	1-1/4"	14	4	20	200	26	1.86"	.53"
334A	1-1/4"	14	1/0	20	200	26	1.86"	.53"
335	1-1/2"	14	4	10	100	16	2.13"	.56"
335A	1-1/2"	14	1/0	10	100	16	2.13"	.56"
336TZ	2"	14	4	10	100	21	2.60"	.66"
336A	2"	14	1/0	10	100	21	2.60"	.66"
337	2-1/2"	14	1/0	---	50	20	3.15"	.75"
337A	2-1/2"	6	250 MCM	---	50	20	3.15"	.75"
338	3"	14	1/0	---	50	29	3.76"	.75"
338A	3"	6	250 MCM	---	50	29	3.76"	.75"
339	3-1/2"	14	1/0	---	10	15	4.27"	.75"
339A	3-1/2"	6	250 MCM	---	10	15	4.27"	.75"
340	4"	14	1/0	---	10	20	4.76"	.75"
340A	4"	6	250 MCM	---	10	20	4.76"	.75"

INSULATED BONDING BUSHINGS

CORROSION RESISTANT - ZINC DIE CAST



332SL



FEATURES

- Designed for superior protection against corrosion
- Tin plated copper lay-in lug
- Durable Zamak-3 Bushing
- UV Resistant liner for direct exposure to the sun
- Stainless steel hardware

APPLICATIONS

- Ideal for solar photovoltaic applications.
- Use to provide a means of grounding Rigid or IMC conduit
- Indoor or outdoor use (lay-in lug)
- Use lug provided for bonding jumper to a neutral bus bar
- Prevent damage to wire insulation with the UV resistant liner

STANDARD MATERIAL

- Body - Zinc (Zamak-3)
- Lug – Tin plated copper
- Clamping screw – Stainless steel
- Set screws – Stainless steel

c UL US

PART #	SIZE	GROUNDING LUG WIRE SIZE MIN.	GROUNDING LUG WIRE SIZE MAX	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	RECOMMENDED TORQUE (IN - LBS)	A	B
332SL	3/4"	14	4	10	100	11	35	1.26"	.41"
333SL	1"	14	4	5	50	7	35	1.53"	.50"
334SL	1-1/4"	14	4	5	50	8	35	1.86"	.53"
335SL	1-1/2"	14	4	5	50	9	35	2.13"	.56"
336SL	2"	14	4	5	50	12	35	2.60"	.66"
334ASL	1-1/4"	14	2/0	5	50	13	35	1.86"	.53"
335ASL	1-1/2"	14	2/0	5	50	14	35	2.13"	.56"
336ASL	2"	14	2/0	5	50	17	35	2.60"	.66"

KNOCKOUT REDUCING WASHERS



902

LISTED

FEATURES
- Use in pairs

APPLICATION
- Use to reduce the size of knockout holes.

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL listed

PART #	REDUCES KO HOLES FROM	TO	MASTER QTY.
900	3/4"	1/2"	100
901	1"	1/2"	100
902	1"	3/4"	100
903	1-1/4"	1/2"	50
904TZ	1-1/4"	3/4"	50
905	1-1/4"	1"	50
906	1-1/2"	1/2"	50
907	1-1/2"	3/4"	50
908	1-1/2"	1"	50
909	1-1/2"	1-1/4"	50
910	2"	1/2"	50
911	2"	3/4"	50
912	2"	1"	50
913	2"	1-1/4"	50
914	2"	1-1/2"	50
915	2-1/2"	1/2"	50
916	2-1/2"	3/4"	50
917	2-1/2"	1"	50
918	2-1/2"	1-1/4"	50
919	2-1/2"	1-1/2"	50
920	2-1/2"	2"	50
921TZ	3"	1/2"	25
922TZ	3"	3/4"	25
923	3"	1"	25
924	3"	1-1/4"	25
925TZ	3"	1-1/2"	25
926TZ	3"	2"	25
927	3"	2-1/2"	25
928TZ	3 1/2"	1/2"	10
929	3-1/2"	3/4"	25
930	3-1/2"	1"	25
931	3-1/2"	1-1/4"	25


PART #	REDUCES KO HOLES FROM	TO	MASTER QTY.
932TZ	3-1/2"	1-1/2"	25
933	3-1/2"	2"	25
934	3-1/2"	2-1/2"	25
935	3-1/2"	3"	25
936TZ	4"	1/2"	10
937	4"	3/4"	10
938	4"	1"	10
939	4"	1-1/4"	10
940	4"	1-1/2"	10
941	4"	2"	10
942	4"	2-1/2"	10
943	4"	3"	10
944	4"	3-1/2"	10

REDUCING BUSHINGS

STEEL



RB1



FEATURES
- Rounded bushing protects conductor

APPLICATIONS
- Dry location use only
- Use to reduce the entry size of a run of threaded conduit

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
RB1	1/2" x 3/8"	100	2	.75"	.563"
RB2TZ	3/4" x 1/2"	100	4	.92"	.65"
RB3	1" x 1/2"	50	6	1.125"	.715"
RB4TZ	1" x 3/4"	50	7	1.125"	.715"
RB5	1-1/4" x 1/2"	25	7	1.47"	.82"
RB6	1-1/4" x 3/4"	25	8	1.47"	.82"
RB7	1-1/4" x 1"	25	4	1.47"	.82"
RB8	1-1/2" x 1/2"	25	11	1.70"	.85"
RB9	1-1/2" x 3/4"	25	8	1.70"	.85"
RB10	1-1/2" x 1"	25	7	1.70"	.85"
RB11	1-1/2" x 1-1/4"	25	3	1.70"	.85"
RB12	2" x 1/2"	10	3	2.23"	.97"
RB13	2" x 3/4"	10	8	2.23"	.97"
RB14	2" x 1"	10	7	2.23"	.97"
RB15	2" x 1-1/4"	10	5	2.23'	.97"
RB16	2" x 1-1/2"	10	3	2.23"	.97"
RB-300100	3" x 1"	1	3	3.50"	1.17"
RB-300125	3" x 1-1/4"	1	3	3.50"	1.17"
RB-300200	3" x 2"	1	3	3.50"	1.17"
RB-300250	3" x 2-1/2"	1	3	3.50"	1.17"
RB-300150	3" x 1-1/2"	1	2	3.50"	1.17"
RB-350200	3-1/2" x 2"	1	4	4"	1.33"
RB-350250	3-1/2"x 2-1/2"	1	3	4"	1.33"
RB-400200	4" x 2"	1	5	4.50"	1.49"
RB-400250	4" x 2-1/2"	1	5	4.50"	1.49"
RB-400300	4" x 3"	1	3	4.50"	1.49"
RB-500400	5" x 4"	1	5	5.56"	1.65"
RB-600500	6" x 5"	1	6	6.62"	1.80"

RIGID REDUCING BUSHINGS

316 STAINLESS STEEL



RB-5038-SS

LISTED

FEATURES
- Threaded NPSM for Rigid and IMC conduit

APPLICATIONS
- Dry location use only
- Use to reduce the entry size of a run of threaded conduit

STANDARD MATERIAL
- Machined 316 stainless steel

CERTIFICATIONS
- UL Listed


PART #	SIZE	MASTER QTY.
RB-5038-SS	1/2"x 3/8"	100
RB-7550-SS	3/4" x 1/2"	50
RB-10050-SS	1" x 1/2"	50
RB-10075-SS	1" x 3/4"	50
RB-12550-SS	1-1/4" x 1/2"	20
RB-12575-SS	1-1/4" x 3/4"	20
RB-125100-SS	1-1/4" x 1"	20
RB-15050-SS	1-1/2" x 1/2"	10
RB-15075-SS	1-1/2" x 3/4"	10
RB-150100-SS	1-1/2" x 1"	10
RB-150125-SS	1-1/2" x 1-1/4"	10
RB-20050-SS	2" x 1/2"	10
RB-20075-SS	2" x 3/4"	10
RB-200100-SS	2" x 1"	10
RB-200125-SS	2" x 1-1/4"	10
RB-200150-SS	2" x 1-1/2"	10
RB-25050-SS	2-1/2" x 1/2"	5
RB-25075-SS	2-1/2" x 3/4'	5
RB-250100-SS	2-1/2" x 1"	5
RB-250125-SS	2-1/2" x 1-1/4"	5
RB-250150-SS	2-1/2" x 1-1/2"	5
RB-250200-SS	2-1/2" x 2"	5
RB-300100-SS	3" x 1"	1
RB-300125-SS	3" x 1-1/4"	1
RB-300150-SS	3" x 1-1/2"	1
RB-300200-SS	3" x 2"	1
RB-300250-SS	3" x 2-1/2"	1
RB-350200-SS	3-1/2" x 2"	1
RB-350250-SS	3-1/2" x 2-1/2"	1
RB-350300-SS	3-1/2" x 3"	1
RB-400200-SS	4" x 2"	1
RB-400250-SS	4" x 2-1/2"	1
RB-400300-SS	4" x 3"	1
RB-400350-SS	4" x 3-1/2"	1
RB-500400-SS	5" x 4"	1
RB-600500-SS	6" x 5"	1

REDUCING BUSHINGS

MALLEABLE IRON



RB17



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
RB17	2-1/2" x 1"	10	11	1.30"	2.88"
RB18	2-1/2" x 1-1/4"	10	13	1.30"	2.88"
RB19	2-1/2" x 1-1/2"	10	9	1.30"	2.88"
RB20	2-1/2" x 2"	10	6	1.30"	2.88"
RB21	3" x 1-1/4"	10	18	1.54"	3.50"
RB22	3" x 1-1/2"	10	17	1.54"	3.50"
RB23	3" x 2"	10	16	1.54"	3.50"
RB24	3" x 2-1/2"	10	10	1.54"	3.50"
RB25	3-1/2" x 1-1/2"	10	24	1.59"	4"
RB26	3-1/2" x 2"	10	29	1.59"	4"
RB27	3-1/2" x 2-1/2"	10	25	1.59"	4"
RB28	3-1/2" x 3"	10	11	1.59"	4"
RB29	4" x 2"	10	28	1.77"	4.51"
RB30	4" x 2-1/2"	10	27	1.77"	4.51"
RB31	4" x 3"	10	22	1.77"	4.51"
RB32	4" x 3-1/2"	10	16	1.77"	4.51"

FEATURES

- Rounded bushing protects conductor

APPLICATIONS

- Dry location use only
- Use to reduce the entry size of a run of threaded conduit

STANDARD MATERIAL

- Malleable iron

STANDARD FINISH


- Zinc plated

RIGID MALE ENLARGERS

STEEL



981S



FEATURES
- Helps to better accommodate design specs

APPLICATIONS
- Converts conduit end sizes; eliminates rework or tear outs

STANDARD MATERIAL
- Steel


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
981S	1/2" – 3/4"	25	250	50	1.35"	1.40"
982S	3/4" – 1"	10	100	12	1.62"	1.40"

RIGID THREADED CONDUIT ENLARGER/REDUCER COUPLING

MALLEABLE IRON



E5075



FEATURES
- Pipe enlargers eliminate the need to tear out old conduits and replace them with new pipes by allowing the utilization of existing rigid or IMC conduits

APPLICATIONS
- Male pipe enlarger is used to convert a Rigid or IMC pipe size to accommodate an installation

STANDARD MATERIAL
- Malleable iron

STANDARD MATERIAL
- Zinc plated

CERTIFICATIONS
- UL Listed

UL LISTED


PART #	CONNECTS CONDUIT MALE SIZE	CONNECTS CONDUIT FEMALE SIZE	MASTER QTY.
E5075	1/2"	3/4"	10
E75100	3/4"	1"	10
E100125	1"	1-1/4"	10
E125150	1-1/4"	1-1/2"	10

RIGID LOCKNUTS

ZINC DIE CAST



241



FEATURES

- Tightens without deformation
- Serrated teeth prevent loosening from vibrations

APPLICATIONS

- Affixes Rigid conduit to an electrical box or other metal enclosure
- To connect externally threaded conduit connector to a threadless opening in a box or enclosure

STANDARD MATERIAL

- Zinc die cast

PART #	SIZE	THREADS PER INCH	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	THREAD PITCH DIAMETER
241	1/2"	14	200	2000	20	1.12"	.15"	.787 – .797
242	3/4"	14	100	1000	20	1.33"	.15"	.999 – 1.009
243	1"	11-1/2	100	1000	20	1.68"	.19"	1.25 – 1.26
244	1-1/4"	11-1/2	50	500	20	2.15"	.19"	1.595 – 1.605
245	1-1/2"	11-1/2	50	500	20	2.35"	.19"	1.837 – 1.847
246	2"	11-1/2	50	200	12	2.89"	.19"	2.307 – 2.317
247	2-1/2"	8	25	100	13	3.43"	.25"	2.777 – 2.788
248	3"	8	25	100	18	4.12"	.25"	3.403 – 3.414
249	3-1/2"	8	10	40	13	4.67"	.27"	3.892 – 3.904
250	4"	8	10	40	15	5.25"	.27"	4.399 – 4.411

316 STAINLESS STEEL



LNSS-50

FEATURES

- LNSS-50 is threaded NPSM for Rigid and IMC conduit

APPLICATIONS

- 316 stainless steel for use in corrosive environments

STANDARD MATERIAL

- 316 stainless steel


PART #	SIZE	MASTER QTY.
LNSS-50	1/2"	100
LNSS-75	3/4"	100
LNSS-100	1"	50
LNSS-125	1-1/4"	50
LNSS-150	1-1/2"	25
LNSS-200	2"	10

RIGID LOCKNUTS

STEEL



282



FEATURES
- Tightens without deformation

APPLICATIONS
- To connect externally threaded conduit or connector to a threadless opening in a box or enclosure

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc plated

PART #	SIZE	THREADS PER INCH	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	THREAD PITCH DIAMETER
281	1/2"	14	100	2000	20	1.15"	.11"	.787 – .797
282	3/4"	14	100	1000	20	1.45"	.115"	.999 – 1.009
283	1"	11-1/2	100	1000	30	1.75"	.14"	1.25 – 1.26
284	1-1/4"	11-1/2	50	500	20	2.10"	.14"	1.595 – 1.605
285	1-1/2"	11-1/2	50	500	30	2.40"	.14"	1.837 – 1.847
286	2"	11-1/2	25	250	20	2.95"	.14"	2.307 – 2.317
287	2-1/2"	8	---	50	6	3.55"	.185"	2.777 – 2.788
288TZ	3"	8	---	50	9	3.55"	.19"	3.403 – 3.414
289	3-1/2"	8	---	25	6	4.20"	.19"	3.892 – 3.904
290TZ	4"	8	---	25	7	4.75"	.19"	4.399 – 4.411
290A	5"	8	---	10	5	6.67"	.38"	5.488 – 5.50
290B	6"	8	---	10	8	7.93"	.40"	6.545 – 6.557

UL LISTED



281UL



FEATURES
- Tightens without deformation
- UL listed

APPLICATIONS
- To connect externally threaded conduit or connector to a threadless opening in a box or enclosure

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB1-2014


PART #	SIZE	THREADS PER INCH	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	THREAD PITCH DIAMETER
281UL	1/2"	14	200	2000	23	1.15"	.125"	.787 – .797
282UL	3/4"	14	100	1000	23	1.45"	.14"	.999 – 1.009
283UL	1"	11-1/2	100	1000	33	1.75"	.1875"	1.250 – 1.260
284UL	1-1/4"	11-1/2	50	500	23	2.10"	.1875"	1.595 – 1.605
285UL	1-1/2"	11-1/2	50	500	33	2.40"	.1875"	1.837 – 1.847
286UL	2"	11-1/2	25	250	23	2.95"	.1875"	2.307 – 2.317
287UL	2-1/2"	8	---	50	8	3.55"	.215"	2.777 – 2.788
288UL	3"	8	---	50	12	3.55"	.215"	3.403 – 3.414
289UL	3-1/2"	8	---	25	9	4.20"	.215"	3.892 – 3.904
290UL	4"	8	---	25	10	4.75"	.215"	4.399 – 4.411

SEALING LOCKNUTS

STEEL



711



FEATURES
- Zinc plated with PVC molded gasket for a watertight seal

APPLICATIONS
- Indoor or outdoor use
- Use to secure Rigid, IMC conduit or various threaded fittings to a steel outlet box or other metal enclosures, when moisture proof protection is required

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated
- Gasket - PVC

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014


PART #	SIZE	THREADS PER INCH	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	THREAD PITCH DIAMETER
711	1/2"	14	50	500	8	1.12"	.26"	.787 – .797
712	3/4"	14	50	500	11	1.37"	.27"	.999 – 1.009
713	1"	11-1/2	25	250	10	1.75"	.28"	1.25 – 1.26
714	1-1/4"	11-1/2	10	100	6	2.06"	.32"	1.595 – 1.605
715	1-1/2"	11-1/2	10	100	7	2.37"	.32"	1.837 – 1.847
716	2"	11-1/2	10	100	9	2.87"	.32"	2.307 – 2.317
717	2-1/2"	8	---	25	3	3.43"	.32"	2.777 – 2.788
718	3"	8	---	25	5	4.12"	.32"	3.403 – 3.414
719	3-1/2"	8	---	25	6	4.62"	.32"	3.892 – 3.904
720TZ	4"	8	---	25	7	5.18"	.32"	4.399 – 4.411
720A	5"	8	---	5	8	6.67"	.50"	5.488 – 5.50
720B	6"	8	---	5	11	7.83"	.52"	6.545 – 6.557

SEALING RINGS

STEEL



720SR



FEATURES
- Liquidtight sealing gasket
- Material resists oil, moisture, and fumes allowing for durable seal for rough edges

APPLICATIONS
- Use with rigid threaded fittings to provide a liquidtight, dust tight seal when entering an enclosure
- Stainless Steel retainer with bonded PVC gasket

STANDARD MATERIAL
- Gasket - PVC
- Retainer - Stainless Steel


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
711SR	1/2"	250	2500	23	1.125"	.125"
712SR	3/4"	200	2000	24	1.375"	.125"
713SR	1"	150	1500	20	1.625"	.125"
714SR	1-1/4"	100	1000	17	2"	.125"
715SR	1-1/2"	50	500	10	2.25"	.125"
716SR	2"	50	500	11	3.50"	.125"
717SR	2-1/2"	---	100	7	3.50"	.1875"
718SR	3"	---	100	9	4.25"	.1875"
719SR	3-1/2"	---	50	6	4.75"	.1875"
720SR	4"	---	50	6	5.1875"	.1875"

GROUNDING LOCKNUTS

STEEL



552TZ



FEATURES
- Tightens without deformation
- UL listed

APPLICATIONS
- To connect externally threaded conduit connector to a threadless opening in a box or enclosure

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 514B
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014


PART #	SIZE	THREADS PER INCH	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	THREAD PITCH DIAMETER
551TZ	1/2"	14	100	1000	30	1.15"	.11"	.787 – .797
552TZ	3/4"	14	100	1000	30	1.45"	.115"	.999 – 1.009
553TZ	1"	11-1/2	50	500	25	1.75"	.14"	1.25 – 1.26
554TZ	1-1/4"	11-1/2	50	500	30	2.10"	.14"	1.595 – 1.605
555TZ	1-1/2"	11-1/2	25	250	22	2.40"	.14"	1.837 – 1.847
556	2"	11-1/2	20	200	28	2.95"	.14"	2.307 – 2.317
557	2-1/2"	8	---	50	8	3.55"	.185"	2.777 – 2.788
558	3"	8	---	50	14	3.55"	.19"	3.403 – 3.414
559	3-1/2"	8	---	25	9	4.20"	.19"	3.892 – 3.904
560	4"	8	---	25	10	4.75"	.19"	4.399 – 4.411
560A	5"	8	---	10	9	6.62"	0.38"	5.488 - 5.500
560B	6"	8	---	10	11	7.93"	0.38"	6.545 - 6.557

FS AND FD CAST DEVICE DOUBLE GANG BOXES

DUAL HUB - HEAVY DUTY - HOT DIP GALAVANIZED



FSC21MHDG



Conforms to finish thickness ASTM A123/123M

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
FSC TYPE						
FSC21MHDG	1/2"	10	34	5.32"	4.71"	2.20"
FSC22MHDG	3/4"	10	34	5.32"	4.71"	2.20"
FSC23MHDG	1"	10	37	5.32"	4.71"	2.20"
FDC TYPE - DEEP						
FDC21MHDG	1/2"	10	38	5.31"	4.70"	2.90"
FDC22MHDG	3/4"	10	39	5.31"	4.70"	2.90"
FDC23MHDG	1"	10	40	5.31"	4.70"	2.90"

FEATURES
- Suitable for use in concrete
- Tapered threaded hubs-NPT
- Internal grounding screw
- Suitable for wet locations when used with cover and neoprene gasket

APPLICATIONS
- For use in areas where boxes are exposed to harsh locations
- Provides opening for making splices
- Serves as a pull box for conductors
- Allows connection for branch conduit runs

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized


CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: Fed. Spec. A-A-50563
- CSA C22.2 No. 18.3
- NEMA: FB 1

FS AND FD CAST DEVICE SINGLE GANG BOXES

SINGLE HUB - HEAVY DUTY - HOT DIP GALAVANIZED



FS1MHDG



Conforms to finish thickness ASTM A123/123M

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
FS TYPE						
FS1MHDG	1/2"	10	24	6.07	2.93"	2.20"
FS2MHDG	3/4"	10	25	6.07	2.93"	2.20"
FS3MHDG	1"	10	25	6.07	2.93"	2.20"
FD TYPE - DEEP						
FD1MHDG	1/2"	10	28	6.09"	2.97"	2.90"
FD2MHDG	3/4"	10	29	6.09"	2.97"	2.90"
FD3MHDG	1"	10	29	6.09"	2.97"	2.90"

FEATURES
- Suitable for use in concrete
- Tapered threaded hubs-NPT
- Internal grounding screw
- Suitable for wet locations when used with cover and neoprene gasket

APPLICATIONS
- For use in areas where boxes are exposed to harsh locations
- Provides opening for making splices
- Serves as a pull box for conductors
- Allows connection for branch conduit runs

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized


CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: A-A-50563
- CSA C22.2 No. 18.3
- NEMA: FB 1

FS AND FD CAST DEVICE SINGLE GANG BOXES

DUAL HUB - HEAVY DUTY - HOT DIP GALAVANIZED



FSC1MHDG



Conforms to finish thickness
ASTM A123/123M

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
FSC TYPE						
FSC1MHDG	1/2"	10	26	6.08"	2.94"	2.20"
FSC2MHDG	3/4"	10	26	6.08"	2.94"	2.20"
FSC3MHDG	1"	10	26	6.08"	2.94"	2.20"
FDC TYPE - DEEP						
FDC1MHDG	1/2"	10	31	6.11"	2.97"	2.90"
FDC2MHDG	3/4"	10	31	6.11"	2.97"	2.90"
FDC3MHDG	1"	10	32	6.11"	2.97"	2.90"

FEATURES
- Suitable for use in concrete
- Tapered threaded hubs-NPT
- Internal grounding screw
- Suitable for wet locations when used with cover and neoprene gasket

APPLICATIONS
- For use in areas where boxes are exposed to harsh locations
- Provides opening for making splices
- Serves as a pull box for conductors
- Allows connection for branch conduit runs

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL Standard: UL 514A
- Fed. Spec: A-A-50563
- CSA C22.2 No. 18.3
- NEMA: FB 1

FS AND FD CAST DEVICE COVERS

BLANK - DUPLEX - UNGUARDED SQUARE SWITCH - GFI STEEL - HOT DIP GALVANIZED



FSBCSHDG



FSDRSHDG



FSGSSHDG



FSGFISHDG

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)
FSBCSHDG	25	5
FSDRSHDG	25	4
FSGSSHDG	25	4
FSGFISHDG	25	3

FEATURES
- Each cover assembled with captive screws; FSBCS raintight if used with neoprene gasket

APPLICATIONS
- For use with all Topaz FS and FD series boxes

STANDARD MATERIAL
- Steel

CERTIFICATIONS
- UL Standard: UL 514A-UL 514D
- Fed. Spec: WC-586D, A-A-50563
- NEMA: FB1-2014

FS AND FD CAST DEVICE BOX GASKET

NEOPRENE RUBBER



FSFDCG

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)
FSFDCG	25	1

FEATURES
- Rugged construction will withstand heavy usage while protecting boxes

APPLICATIONS
- For use with all Topaz FS and FD series boxes and covers

STANDARD MATERIAL
- Neoprene rubber

FS AND FD CAST DEVICE BOX COVERS

BLANK - DUPLEX - GUARDED SQUARE SWITCH
MALLEABLE IRON - HOT DIP GALVANIZED



FSBCMHDG



FSDRMHDG



FSGSMHDG

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)
FSBCMHDG	25	17
FSDRMHDG	25	13
FSGSMHDG	25	15

FEATURES
- Each cover assembled with captive screws

APPLICATIONS
- For use with all FS and FD series boxes

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated


CERTIFICATIONS
- UL Standard: UL 514A-UL 514D
- Fed. Spec: WC-586D, A-A-50563
- NEMA: FB1-2014

COMBINATION COUPLINGS

SET SCREW TYPE - EMT TO RIGID - STEEL



391S



FEATURES
- Ensures continued mechanical protection
- Concrete tight when taped

APPLICATIONS
- Indoor use only
- Use to join EMT conduit to rigid metal conduit

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	SCREWS
391S	1/2"	25	250	31	.85"	1.20"	.72"	.855"	2
392S	3/4"	10	100	19	1"	1.31"	.94"	1.065"	2
393S	1"	10	100	27	1.27"	1.53"	1.17"	1.32"	3

COMBINATION COUPLINGS

COMPRESSION TYPE EMT TO RIGID - STEEL



391C



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
391C	1/2"	20	200	31	1.10"	1.57"
392C	3/4"	10	100	21	1.33"	1.62"
393C	1"	10	100	30	1.63"	1.82"

FEATURES
- Internally threaded for Rigid/IMC conduit
- Compression type EMT
- Raintight

APPLICATIONS
- Suitable for indoor and outdoor use
- Use to join Rigid/IMC conduit to EMT between 2 different raceways
- Coupling internally threaded for Rigid/IMC
- Compression type for EMT, concrete tight

STANDARD MATERIAL
- Steel


STANDARD MATERIAL
- Zinc plated

CERTIFICATIONS
- UL standard 514B
- Fed. Spec A-A-50553
- NEMA FB 1

LIQUIDTIGHT TO RIGID - STEEL



50SLT



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
50SLT	3/8" – 1/2"	20	200	33	1.10"	1.78"
51SLT	1/2"	20	200	29	1.17"	1.78"
52SLT	3/4"	10	100	23	1.43"	1.94"
53SLT	1"	5	50	18	1.76"	2.19"
54SLT	1-1/4"	5	50	30	2.16"	2.23"
55SLT	1-1/2"	-	12	8	2.38"	2.62"
56SLT	2"	-	5	5	2.87"	2.67"

FEATURES
- Liquidtight, raintight, oiltight
- NPSM thread
- Labor saving

APPLICATON
- Use to join liquidtight metal conduit (LFMC) to Rigid/IMC conduit between 2 different raceways
- Suitable for use in wet locations
- Raintight, concrete tight

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL standard 514B
- Fed. Spec A-A-50553
- NEMA FB 1

RIGID FLOOR FLANGE PLATES


MALLEABLE IRON



291TZ



FF300



FEATURES
- Provides a solid means of support for 1/2" through 2" threaded pipes

APPLICATON
- Use to connect threaded Rigid or IMC conduits to flat surfaces
- The threaded hub allows pipes to be screwed in and securely fastened

STANDARD MATERIAL
- Malleable iron

STANDARD FINISH
- Zinc plated

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A
291TZ	1/2"	50	23	3"
292TZ	3/4"	50	25	3.375"
293TZ	1"	50	43	3.625"
294TZ	1-1/4"	25	20	4"
295TZ	1-1/2"	25	32	4.375"
296	2"	25	27	4.875"
FF250	2-1/2"	5	48	7.50"
FF300	3"	5	62	8.25"
FF400	4"	5	100	10"
FF500	5"	1	24	11"
FF600	6"	1	32	12.50"

FLOOR/CEILING FLANGES, LIGHT-DUTY

STEEL



FFE50

FEATURES
- .079" pre–galvanized steel, painted black

APPLICATON
- Use with treaded Rigid conduit for mounting to flat surfaces
- Perfect solution for hanging cameras, life safety appliances, and light-weight speakers

STANDARD FINISH
- Steel

PART #	SIZE	MASTER QTY.
FFE50	1/2"	50
FFE75	3/4"	50

RIGID, THREADED CONDUIT HOLE PLUGS

MALLEABLE IRON



PLG50

PART #	RIGID SIZE	MASTER QTY.
PLG50	1/2"	50
PLG75	3/4"	50
PLG100	1"	25
PLG125	1-1/4"	25
PLG150	1-1/2"	25
PLG200	2"	25
PLG250	2-1/2"	2
PLG300	3"	2
PLG350	3-1/2"	1
PLG400	4"	1
PLG500	5"	1
PLG600	6"	1

FEATURES

- Tapered threads for easy installation
- No-slip square head drive to tighten

APPLICATON

- Conduit hole plugs are used for closing threaded conduit hubs

MATERIAL/FINISH

- Malleable iron

RIGID CONCRETE SLAB INSERTS

STRAIGHT - MALLEABLE IRON



EF75

LISTED

PART #	SIZE	MASTER QTY.
EF50	1/2"	10
EF75	3/4"	20
EF100	1"	10
EF125	1-1/4"	10

FEATURES
- Provides flush threaded conduit hub for mounting, pulling and future access to conduit system
- Permits prefabrication of in-slab conduit system
- EF50 and EF125 include rubber, plug gasket

APPLICATON
- For use in concrete slab

MATERIAL/FINISH
- Malleable iron

CERTIFICATIONS
- UL Listed (EF50 only)

RIGID CONCRETE SLAB INSERTS

90° - MALLEABLE IRON



EFL50

LISTED

PART #	SIZE	MASTER QTY.
EFL50	1/2"	10
EFL75	3/4"	20
EFL100	1"	10
EFL125	1-1/4"	10

FEATURES
- Provides flush threaded conduit hub for mounting, pulling and future access to conduit system
- Permits prefabrication of in-slab conduit system

APPLICATON
- Allows in-slab ceiling drops and floor mounts in poured concrete


MATERIAL/FINISH
- Malleable iron

CERTIFICATIONS
- cULus Listed (exception ELF125)

ONE HOLE RIGID STRAP



531



FEATURES
- Snap-on Rigid strap with one hole
- Greater load bearing capability
- Easy to install

APPLICATON
- Indoor or outdoor, use to secure EMT, Rigid or IMC conduit to wood, masonry or wherever greater load bearing is required.

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIONS
- UL Standard: UL 2239
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014

c UL us LISTED

PART #	RIGID SIZE	BOX QTY.	A	B
531A**	1/4"	100	1.51"	.562"
531B	3/8"	100	1.81"	.562"
531	1/2"	50	1.91"	.625"
532	3/4"	50	2.21"	.75"
533	1"	25	2.57"	.875"
534	1-1/4"	20	2.79"	.88"
535	1-1/2"	20	3.69"	.899"
536	2"	10	4.17"	1.14"
517TZ*	2-1/2"	50	5"	1.28"
518TZ*	3"	25	5.55"	1.28"
519*	3-1/2"	25	6.37"	1.28"
520*	4"	25	6.87"	1.28"

*EMT and Rigid
**Not UL Listed




CONDUIT HANGERS

WITH BOLT AND NUT ATTACHED - STEEL



601TZ

E174011



FEATURES
- Assembled with nut and bolt

APPLICATON
- Indoor or outdoor use
- Use to secure and suspend conduit from overhead supports

MATERIAL/FINISH
- Steel

CERTIFICATIONS
- Zinc plated



PART #	UPC	SIZE	RIGID	EMT	BOLT SIZE	CARTON QTY	CARTON WEIGHT	A	B	C	D
601TZ	15830	0	3/8"-1/2"		1/4"-20	100	6	1.875	0.75	0.725	0.25
602TZ	15840	1	3/4"	3/4"	1/4"-21	100	8	2.125	0.75	0.85	0.25
603TZ	15850	2	1"	1"	1/4"-22	100	8	2.437	0.875	0.975	0.25
604	15860	3	1-1/4"	1-1/2"	1/4"-23	100	10	2.75	0.875	0.975	0.25
604A	15870	2/1/02	---	1-1/4"	1/4"-24	100	10	2.875	0.875	1.05	0.25
605	15880	4	1-1/2"	---	1/4"-25	100	18	3.125	1	1.125	0.25
606	15890	5	2"	2"	1/4"-26	50	10	3.875	1	1.145	0.25
607	15900	6	2-1/2"	2-1/2"	5/16"-18	50	11	4.625	1.25	1.225	0.3125
608TZ	15910	7	3"	3"	5/16"-19	25	6	5.5	1.25	1.275	0.3125
609TZ	15920	8	3-1/2"	3-1/2"	5/16"-20	25	8	5.75	1.25	1.275	0.3125
610	15930	9	4"	4"	5/16"-21	25	12	6.25	1.25	1.275	0.3125

ONE HOLE STRAP FOR RIGID/IMC CONDUIT



OHSR-38M

c UL us LISTED

FEATURES
- Use to secure Rigid/IMC conduit in

APPLICATON
- Use to secure Rigid/IMC conduit in surface mount applications.

MATERIAL/FINISH
- Malleable Iron/Zinc plated

CERTIFICATIONS
- cULus Listed

PART #	RIGID SIZE	INNER QTY.	MASTER QTY.
OHSR-38M	3/8"	---	50
561	1/2"	25	250
562	3/4"	25	250
563	1"	25	125
564	1-1/4"	20	100
565TZ	1-1/2"	10	100
566	2"	10	50
567	2-1/2"	5	25
568TZ	3"	---	5
569	3-1/2"	---	5
570	4"	---	5
570A	5"	---	2
570B	6"	---	2


ONE HOLE - HOT DIP GALVANIZED - MALLEABLE IRON



561HDG

UL

Conforms to finish thickness ASTM A123/123M



FEATURES
- Hot dip galvanized for added durability and corrosion protection

APPLICATON
- Use to secure Rigid or IMC conduit to wood, masonry or similar surfaces where greater load bearing is required

MATERIAL/FINISH
- Malleable Iron

CERTIFICATIONS
- UL 2239
- Fed. Spec. A-A-50553
- NEMA FB 1

PART #	SIZE	HOLE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
561HDG	1/2"	.31	100	1000	40	1. 98"	.67"	.97"
562HDG	3/4"	.31	50	500	25	2.37"	.76"	1.10"
563HDG	1"	.31	25	250	20	2.90"	.82"	1.44"
564HDG	1-1/4"	.43	20	250	25	3.12"	.82"	1.77"
565HDG	1-1/2"	.45	10	200	32	3.90"	1.05"	2.06"
566HDG	2"	.55	---	100	36	4.77"	1.36"	2.59"
567HDG	2-1/2"	.57	---	25	17	5.45"	1.36"	3.05"
568HDG	3"	.57	---	25	25	6.74"	1.54"	3.77"
569HDG	3-1/2"	.69	---	25	38	7.72"	1.91"	4.24"
570HDG	4"	.71	---	10	23	8.13"	2.07"	4.98"
570AHDG	5"	.96	---	10	34	10.94"	2.55"	6.22"
570BHDG	6"	1.18	---	10	40	12.71"	2.91"	7.45"

TWO HOLE RIGID STRAP



THSSR-50

UL LISTED c UL US LISTED

FEATURES
- Inverted rib provides strength to keep cable secure
- Snap-on Rigid strap with two holes

APPLICATION
- Indoor or outdoor, use to secure EMT, Rigid or IMC conduit to wood, masonry or where greater load bearing is required.

CERTIFICATIONS
- cULus Listed (except 123)
- UL Listed (for THSSR*)

PART #	MATERIAL	RIGID SIZE	INNER QTY	BOX QTY.
123	ZINC PLATED STEEL	3/8"	100	500
541		1/2"	100	500
542		3/4"	50	250
543		1"	25	125
544	ZINC PLATED STEEL	1-1/4"	---	50
545		1-1/2"	---	50
546		2"	---	50
527		2-1/2"	---	50
528TZ		3"	---	25
529TZ		3-1/2"	---	25
530TZ		4"	---	20
530A		5"	---	10
530B		6"	---	10
THSSR-50	316 STAINLESS STEEL	1/2"	---	50
THSSR-75		3/4"	---	50
THSSR-100		1"	---	25
THSSR-125		1-1/4"	---	25
THSSR-150		1-1/2"	---	25
THSSR-200		2"	---	25
THSSR-250		2-1/2"	---	25
THSSR-300		3"	---	10
THSSR-350		3-1/2"	---	10
THSSR-400		4"	---	10

ONE HOLE RIGID CLAMP BACK SPACER



481

c UL us
LISTED

PART #	RIGID SIZE	INNER QTY.	MASTER QTY.
481	1/2"	25	250
482	3/4"	25	250
483	1"	25	125
484	1-1/4"	20	100
485	1-1/2"	10	100
486	2"	10	50
487	2-1/2"	5	25
488	3"	---	10
489	3-1/2"	---	10
489A	4"	---	10
489B	5"	---	2
489C	6"	---	2

FEATURES
- For use with malleable or aluminum straps

APPLICATION
- Use to provide space between conduit and mounting surface.

MATERIAL/FINISH
- Malleable Iron/Zinc p lated

CERTIFICATIONS
- cULus Listed


HOT DIP GALVANIZED - MALLEABLE IRON



481HDG

UL

Conforms to finish thickness
ASTM A123/123M



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
481HDG	1/2"	25	250	15	2.06"	1.01"	.44"
482HDG	3/4"	25	250	23	2.44"	1.20"	.48"
483HDG	1"	25	250	35	2.92"	1.31"	.56"
484HDG	1-1/4"	10	100	21	3.41"	1.49"	.67"
485HDG	1-1/2"	10	100	27	3.78"	1.52"	.76"
486HDG	2"	5	50	22	4.73"	1.92"	.80"
487HDG	2-1/2"	---	25	14	5.48"	2.42"	.80"
488HDG	3"	---	10	9	6.66"	2.63"	.83"
489HDG	3-1/2"	---	12	10	7.12"	2.87"	1.03"
489AHDG	4"	---	18	21	8.43"	3.12"	1.09"
489BHDG	5"	---	10	21	10.78"	3.68"	1.30"
489CHDG	6"	---	10	29	12.68"	3.96"	1.89"

FEATURES
- Hot dip galvanized for added durability and corrosion protection

APPLICATIONS
- For use in wet or dry locations in conjunction with malleable Rigid conduit straps to create space between conduit and mounting surface

STANDARD MATERIAL
- Malleable iron


STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- UL 2239
- RoHS
- Fed. Spec. A-A-50553
- NEMA FB 1

ELBOWS, COUPLINGS AND NIPPLES

Southwire offers a broad range of UL Listed metallic and non-metallic Cable connectors suitable for Romex® Brand and NM cable. Available in Snap-in, compression and traditional strap type enclosures, our fittings accommodate a wide range of cable sizes.

Metallic and Non-metallic Romex Connectors
SE Round Connectors
Snap in Romex® Brand Connectors
NM Straps
Combination Couplings
UF Connectors
Zinc Flexible Cord Connectors
Steel Flexible Cord Connectors

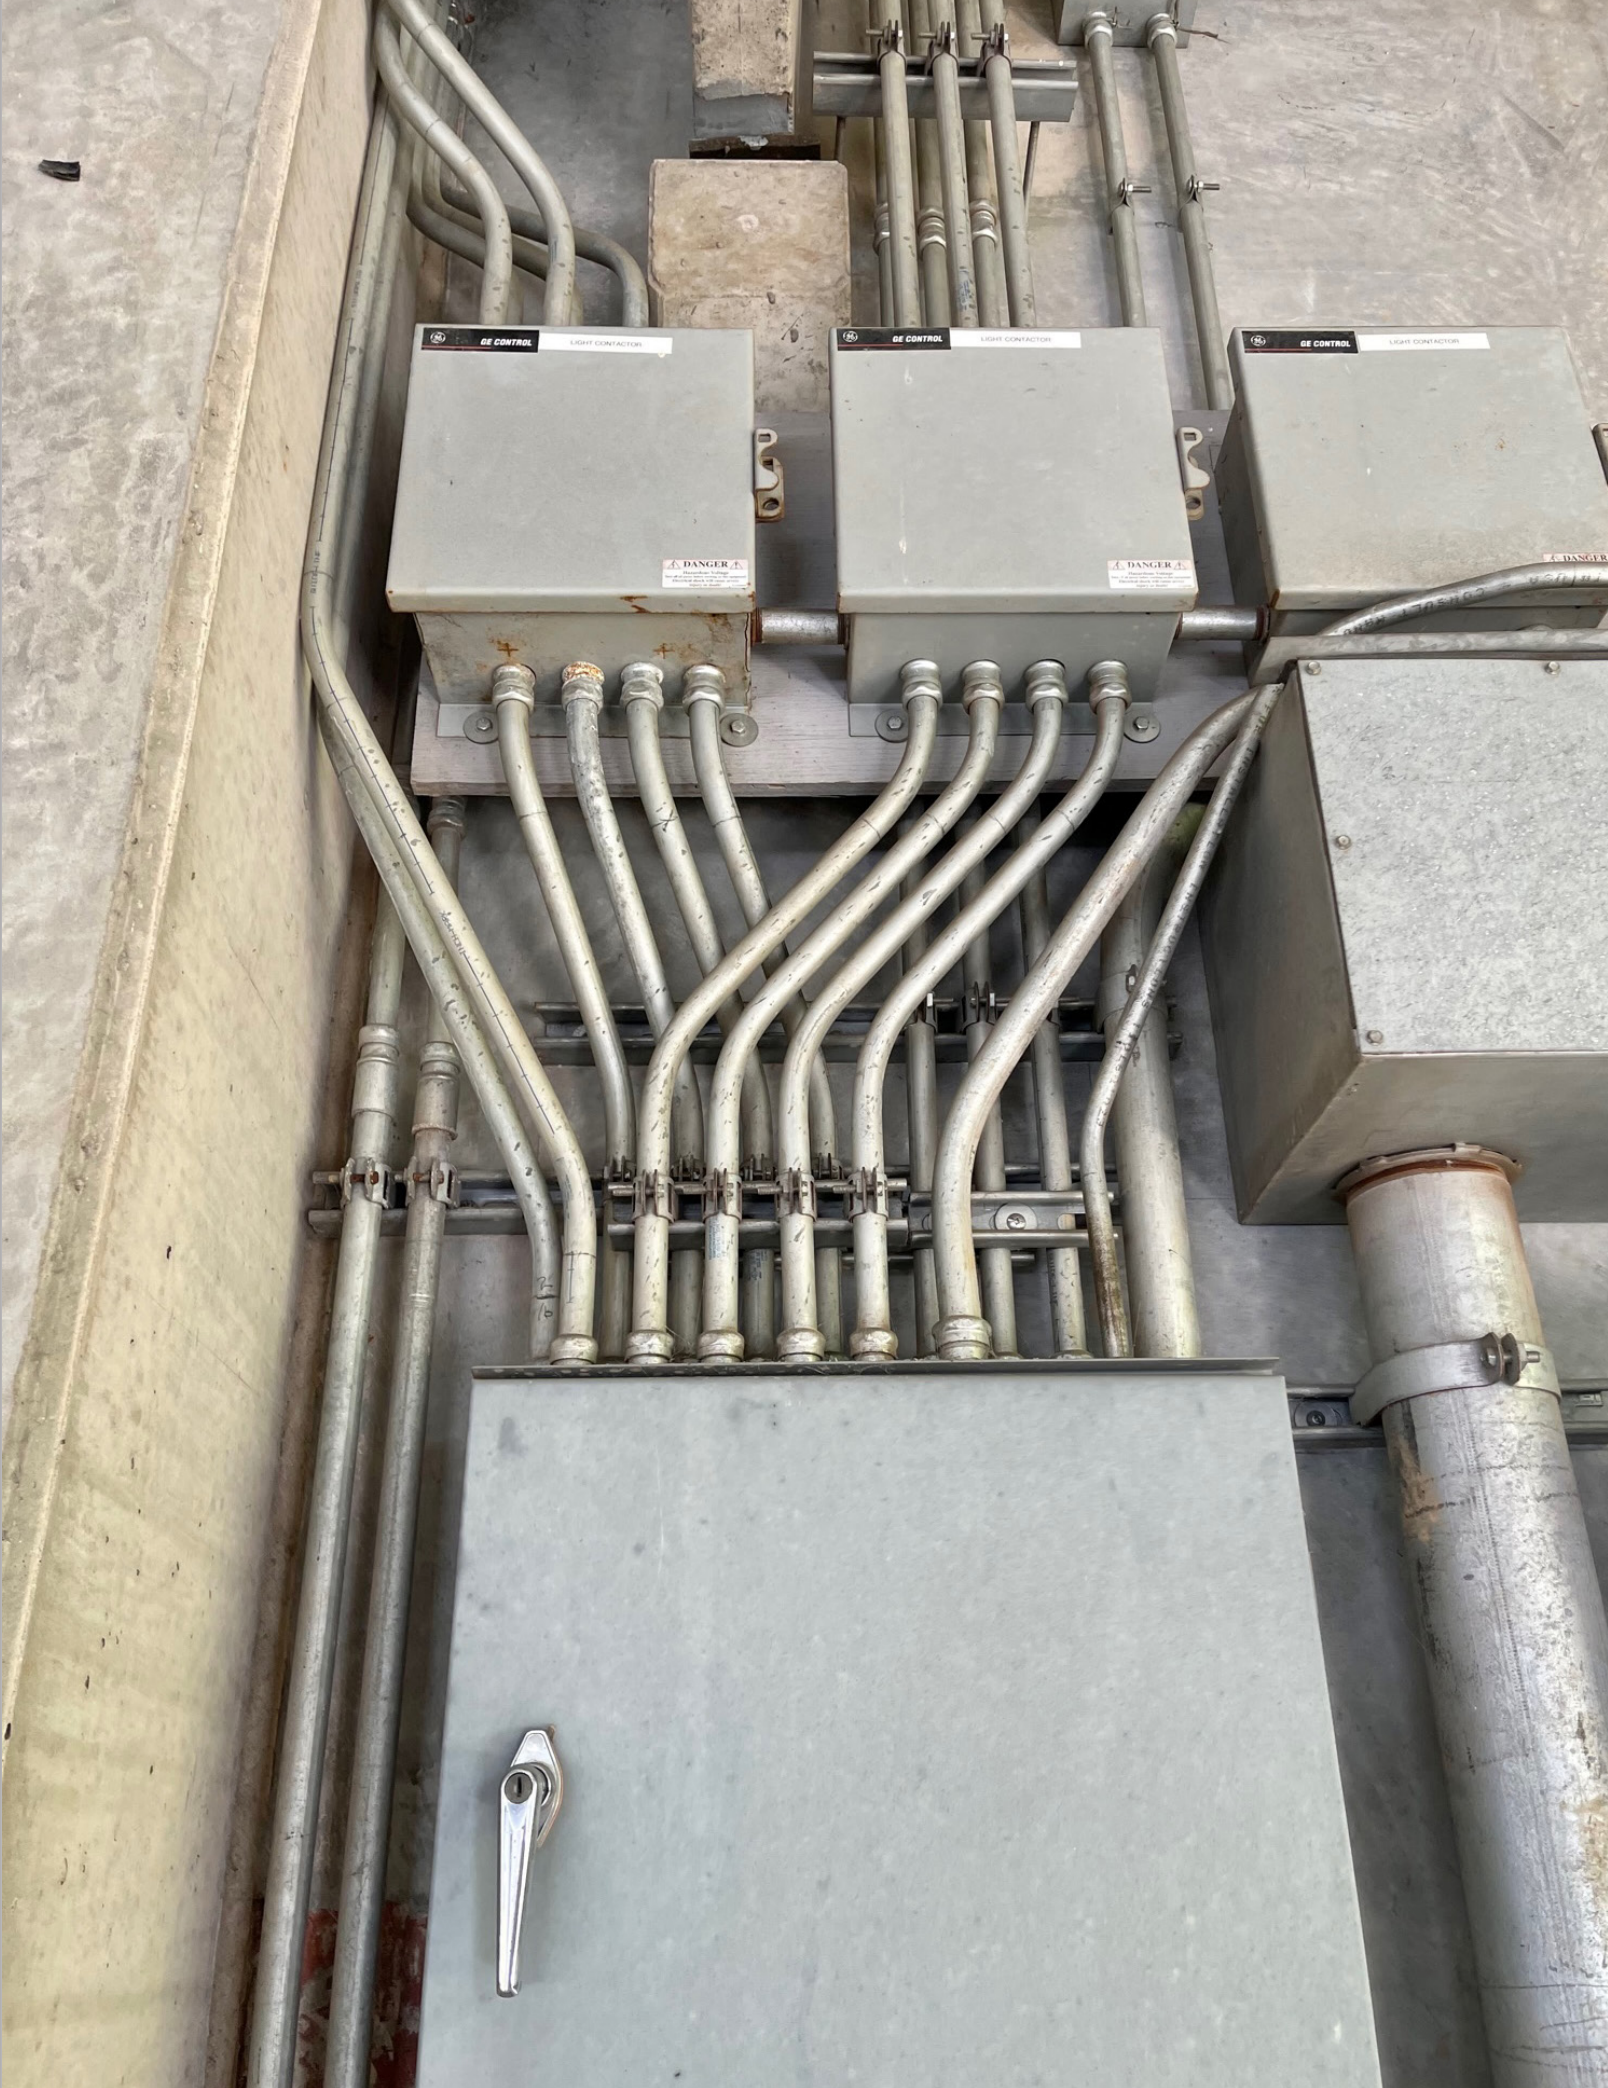

GE CONTROL
LIGHT CONTACTOR
DANGER
GE CONTROL
LIGHT CONTACTOR
DANGER
GE CONTROL
LIGHT CONTACTOR

EMT ELBOWS

90° - GALVANIZED STEEL



81



FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to EMT conduit; bend enables directional changes in conduit

STANDARD MATERIAL
- Galvanized steel


CERTIFICATIONS
- UL Standard: UL 797
- Fed. Spec: WW-C-563
- NEMA: ANSI C80.3-2015

PART #	SIZE	INNER QTY.	SHIP CASE	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B)STRAIGHT LEG EACH END	(C) OFFSET
81	1/2"	---	50	14	4"	2.875"	6.343"
82	3/4"	---	50	23	4.50"	2.875"	6.781"
83	1"	---	20	16	5.75"	3"	8.901"
84	1-1/4"	---	20	30	7.25"	3.25"	10.25"
85	1-1/2"	---	10	20	8.25"	3.625"	11.937"
86	2"	---	10	30	9.50"	4.1875"	14.031"
87	2-1/2"	1	50	300	10.50"	5.25"	16"
88	3"	1	35	315	13"	5.8125"	18.947"
89TZ	3-1/2"	1	35	385	15"	6.75"	22.218"
89A	4"	1	25	375	16"	6.9375"	23.437"

45° - GALVANIZED STEEL



21



FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to EMT conduit; bend enables directional changes in conduit

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Standard: UL 797
- Fed. Spec: WW-C-563
- NEMA: ANSI C80.3-2015


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B)STRAIGHT LEG EACH END
21	1/2"	---	50	11	4"	2.875"
22	3/4"	---	50	19	4.50"	2.875"
23	1"	---	35	25	5.75"	3"
24	1-1/4"	---	30	30	7.25"	3.25"
25TZ	1-1/2"	---	15	44	8.25"	3.625"
26TZ	2"	---	15	31	9.50"	4.1875"
27TZ	2-1/2"	1	50	250	10.50"	5.25"
28	3"	1	40	280	13"	5.8125"
29TZ	3-1/2"	1	35	315	15"	6.75"
30	4"	1	35	420	16"	6.9375"

EMT ELBOWS

30° - GALVANIZED STEEL



8430



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B)STRAIGHT LEG EACH END
8430	1-1/4"	---	30	19	7.25"	2.781"
8530	1-1/2"	---	15	25	8.25"	2.781"
8630	2"	---	10	20	9.50"	2.781"
8730	2-1/2"	1	50	161	10.50"	3"
8830	3"	1	35	153	13"	3.125"
8930	3-1/2"	1	35	244	15"	3.281"
89A30	4"	1	35	309	16"	3.375"

FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to EMT conduit; bend enables directional changes in conduit


STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- cULus Listed
- UL Standard: UL 797
- Fed. Spec: WW-C-563
- NEMA: ANSI C80.3-2015

22.5° - GALVANIZED STEEL



8422



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B) STRAIGHT LEG EACH END
8422	1-1/4"	---	30	17	7.25"	2.781"
8522	1-1/2"	---	15	24	8.25"	2.781"
8622	2"	---	10	18	9.50"	2.781"
8722	2-1/2"	1	50	150	10.50"	3"
8822	3"	1	35	175	13"	3.125"
8922	3-1/2"	1	35	210	15"	3.281"
89A22	4"	1	35	280	16"	3.375"

FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to EMT conduit; bend enables directional changes in conduit

STANDARD MATERIAL
- Galvanized steel


CERTIFICATIONS
- cULus Listed
- UL Standard: UL 797
- Fed. Spec: WW-C-563
- NEMA: ANSI C80.3-2015

EMT ELBOWS

15° - GALVANIZED STEEL



8415



PART #	PIPE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B) STRAIGHT LEG EACH END
8415	1-1/4"	---	30	16	7.25"	2.781"
8515	1-1/2"	---	15	22	8.25"	2.781"
8615	2"	---	10	16	9.50"	2.781"
8715	2-1/2"	1	50	150	10.50"	3"
8815	3"	1	35	140	13"	3.125"
8915	3-1/2"	1	35	210	15"	3.281"
89A15	4"	1	35	245	16"	3.375"

FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to EMT conduit; bend enables directional changes in conduit

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- cULus Listed
- UL Standard: UL 797
- Fed. Spec: WW-C-563
- NEMA: ANSI C80.3-2015

EMT SPECIAL RADIUS ELBOWS

GALVANIZED STEEL



8624

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
8624	2" x 90° x 24"	1	14
8636	2" x 90° x 36"	1	22
8836	3" x 90° x 36"	1	45
89A36	4" x 90° x 36"	1	55
89A48	4" x 90° x 48"	1	55

FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to EMT conduit; bend enables directional changes in conduit
- 45° or 90° bends

STANDARD MATERIAL
- Galvanized steel


CERTIFICATIONS
- UL Standard: UL 797
- Fed. Spec: WW-C-563
- NEMA: ANSI C80.3-2015

RIGID ELBOWS

90° - GALVANIZED STEEL



61



FEATURES

- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS

- For a secure connection to Rigid conduit; bend enables directional changes in conduit

STANDARD MATERIAL

- Galvanized steel

STANDARD FINISH

- Hot dip galvanized

CERTIFICATIONS

- cULus Listed
- Fed. Spec: WW-C-563
- 1/2"-4" meet UL 6 and ANSI C80.1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B) STRAIGHT LEG EACH END	(C) OFFSET
61	1/2"	---	50	40	4"	2.875"	6.343"
62	3/4"	---	50	54	4.50"	2.875"	6.781"
63	1"	---	20	40	5.75"	3"	8.901"
64	1-1/4"	---	20	60	7.25"	3.25"	10.25"
65	1-1/2"	---	10	42	8.25"	3.625"	11.937"
66	2"	---	10	68	9.50"	4.1875"	14.031"
67	2-1/2"	1	50	650	10.50"	5.25"	16"
68	3"	1	35	630	13"	5.8125"	18.947"
69	3-1/2"	1	35	910	15"	6.75"	22.218"
70	4"	1	25	825	16"	6.9375"	23.437"
70A	5"	1	30	1350	24"	11.125"	36.156"
70B	6"	1	24	1152	30"	12.4375"	41.46"

RIGID ELBOWS

45° - GALVANIZED STEEL



11



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B)STRAIGHT LEG EACH END
11	1/2"	---	50	26	4"	2.875"
12	3/4"	---	50	38	4.50"	2.875"
13	1"	---	35	45	5.75"	3"
14	1-1/4"	---	30	60	7.25"	3.25"
15	1-1/2"	---	15	45	8.25"	3.625"
16	2"	---	15	68	9.50"	4.1875"
17	2-1/2"	1	50	400	10.50"	5.25"
18	3"	1	40	455	13"	5.8125"
19	3-1/2"	1	35	560	15"	6.75"
20	4"	1	35	770	16"	6.9375"
20A	5"	1	42	1840	24"	8.125"
20B	6"	1	36	2556	30"	13.25"

FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to Rigid conduit; bend enables directional changes in conduit

STANDARD MATERIAL
- Galvanized steel


STANDARD FINISH
- Hot dip galvanized

CERTIFICATIONS
- Fed. Spec: WW-C-563
- 1/2" to 4" meet UL 6 and ANSI C80.1

30° - GALVANIZED STEEL



6430



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A)MIN. UL RADIUS	(B)STRAIGHT LEG EACH END
6430	1-1/4"	---	20	40	7.25"	2.781"
6530	1-1/2"	---	15	39	8.25"	2.781"
6630	2"	---	10	42	9.50"	2.781"
6730	2-1/2"	1	50	400	10.50"	3"
6830	3"	1	35	420	13"	3.125"
6930	3-1/2"	1	35	595	15"	3.281"
7030TZ	4"	1	35	700	16"	3.375"

FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to Rigid conduit; bend enables directional changes in conduit

STANDARD MATERIAL
- Galvanized steel


CERTIFICATIONS
- UL 797
- Fed. Spec: WW-C-563
- ANSI C80.1

RIGID ELBOWS

22.5° - GALVANIZED STEEL



6422



FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to Rigid conduit; bend enables directional changes in conduit

STANDARD MATERIAL
- Galvanized steel


CERTIFICATIONS
- UL 6
- Fed. Spec: WW-C-581
- ANSI C80.1

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A) MIN. UL RADIUS	(B)STRAIGHT LEG EACH END
6422	1-1/4"	---	20	34	7.25"	2.781"
6522	1-1/2"	---	15	36	8.25"	2.781"
6622	2"	---	10	38	9.50"	2.781"
6722	2-1/2"	1	50	400	10.50"	3"
6822	3"	1	35	385	13"	3.125"
6922	3-1/2"	1	35	490	15"	3.281"
7022	4"	1	35	630	16"	3.375"

15° - GALVANIZED STEEL



6415TZ



FEATURES
- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

APPLICATIONS
- For a secure connection to Rigid conduit; bend enables directional changes in conduit

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL 797
- Fed. Spec: WW-C-563
- ANSI C80.1

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	(A)MIN. UL RADIUS	(B)STRAIGHT LEG EACH END
6415TZ	1-1/4"	---	20	32	7.25"	2.781"
6515	1-1/2"	---	15	34	8.25"	2.781"
6615	2"	---	10	33	9.50"	2.781"
6715	2-1/2"	1	50	350	10.50"	3"
6815	3"	1	35	350	13"	3.125"
6915	3-1/2"	1	35	455	15"	3.281"
7015	4"	1	35	595	16"	3.375"

RIGID SPECIAL RADIUS ELBOWS

NPT THREAD WITH END CAP ON EACH END - GALVANIZED STEEL



6624

FEATURES

- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior
- NPT thread with end cap on each end

APPLICATIONS

- For a secure connection to Rigid conduit; bend enables directional changes in conduit

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- cULus

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
6624	2" x 90° x 24"	1	17
6636	2" x 90° x 36"	1	22
6648TZ	2" x 90° x 48"	1	29.5
6724	2-1/2" x 90° x 24"	1	26
6736	2-1/2" x 90° x 36"	1	34
6824	3" x 90° x 24"	1	33
6836	3" x 90° x 36"	1	43
6848	3" x 90° x 48"	1	60
6924	3-1/2" x 90° x 24"	1	41
7024	4" x 90° x 24"	1	47
7036	4" x 90° x 36"	1	72
7048	4" x 90° x 48"	1	81
7060	4" x 90° x 60"	1	88
70A36	5" x 90° x 36"	1	83
70A48	5" x 90° x 48"	1	108
70B36	6" x 90° x 36"	1	120
70B48	6" x 90° x 48"	1	145
70B60	6" x 90° x 60"	1	165

CONDUIT NIPPLES

GALVANIZED STEEL



64536



6457

FEATURES
- NPT thread
- High corrosion resistance

APPLICATIONS
- Use to extend a length of threaded Rigid or IMC conduit

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- cULus Listed
- Fed. Spec: WW-C-563
- 1/2"-4" meet UL 6 and ANSI C80.1

PART #	SIZE	LENGTH INCHES	MASTER QTY.	WEIGHT/ CASE (LBS.)
6451	1/2"	CLOSE	25	6
6451112	1/2"	1-1/2	25	8
64512	1/2"	2	25	12
6451212	1/2"	2-1/2	25	15
64513	1/2"	3	25	26
6451312	1/2"	3-1/2	25	6
64514	1/2"	4	25	26
64515	1/2"	5	25	33
64516	1/2"	6	25	40
64518	1/2"	8	1	54
645110	1/2"	10	1	68
645112	1/2"	12	1	82
6452	3/4"	CLOSE	25	9
6452112	3/4"	1-1/2	25	10
64522	3/4"	2	25	14
6452212	3/4"	2-1/2	25	19
64523	3/4"	3	25	26
6452312	3/4"	3-1/2	25	28
64524	3/4"	4	25	34
64525	3/4"	5	25	43
64526	3/4"	6	25	52
N-75700	3/4"	7	1	65
64528	3/4"	8	1	73
645210	3/4"	10	1	89
645212	3/4"	12	1	109
6453	1"	CLOSE	25	16
64532	1"	2	25	22
6453212	1"	2-1/2	25	28
64533	1"	3	25	26
6453312	1"	3-1/2	25	43
64534	1"	4	25	49
64535	1"	5	25	64
64536	1"	6	25	20
N-100700	1"	7	1	1
64538	1"	8	1	1
645310	1"	10	1	1
645312	1"	12	1	2

PART #	SIZE	LENGTH INCHES	MASTER QTY.	WEIGHT/ CASE (LBS.)
6454	1-1/4"	CLOSE	25	22
64542	1-1/4"	2	25	28
6454212	1-1/4"	2-1/2	25	37
64543	1-1/4"	3	25	25
6454312	1-1/4"	3-1/2	25	55
64544	1-1/4"	4	25	66
64545	1-1/4"	5	25	84
64546	1-1/4"	6	25	25
64548	1-1/4"	8	25	25
645410	1-1/4"	10	1	2
645412	1-1/4"	12	1	2
6455	1-1/2"	CLOSE	25	28
64552	1-1/2"	2	25	34
6455212	1-1/2"	2-1/2	25	44
64553	1-1/2"	3	25	25
6455312	1-1/2"	3-1/2	25	68
64554	1-1/2"	4	25	80
64555	1-1/2"	5	25	103
64556	1-1/2"	6	1	31
N-150700	1-1/2"	7	1	2
64558	1-1/2"	8	1	2
645510	1-1/2"	10	1	2
645512	1-1/2"	12	1	3
6456	2"	CLOSE	25	44
6456212	2"	2-1/2	25	15
64563	2"	3	25	25
6456312	2"	3-1/2	1	40
64564	2"	4	1	40
64565	2"	5	1	44
64566	2"	6	1	46
64567	2"	7	1	25
64568	2"	8	1	2
645610	2"	10	1	3
645612	2"	12	1	3

CONDUIT NIPPLES

GALVANIZED STEEL

(continued)



64536



6457

PART #	SIZE	LENGTH INCHES	MASTER QTY.	WEIGHT/ CASE (LBS.)
6457	2-1/2"	CLOSE	1	84
64573	2-1/2"	3	1	1
6457312	2-1/2"	3-1/2	1	12
64574	2-1/2"	4	1	150
64575	2-1/2"	5	1	197
64576	2-1/2"	6	1	3
N-250700	2-1/2"	7	1	3
64578	2-1/2"	8	1	3
645710	2-1/2"	10	1	4
645712	2-1/2"	12	1	5
6458	3"	CLOSE	1	1
64583	3"	3	1	1
6458312	3"	3-1/2	1	2
64584	3"	4	1	2
64585	3"	5	1	3
64586	3"	6	1	3
64588	3"	8	1	4
645810	3"	10	1	5
645812	3"	12	1	6


PART #	SIZE	LENGTH INCHES	MASTER QTY.	WEIGHT/ CASE (LBS.)
6459	3-1/2"	CLOSE	1	2
64594	3-1/2"	4	1	2
64595	3-1/2"	5	1	3
64596	3-1/2"	6	1	4
64598	3-1/2"	8	1	5
645910	3-1/2"	10	1	7
645912	3-1/2"	12	1	8
6410TZ	4"	CLOSE	1	2
64104	4"	4	1	3
64105	4"	5	1	4
64106	4"	6	1	4
N-400700	4"	7	1	3
64108	4"	8	1	6
641010	4"	10	1	8
641012	4"	12	1	9

RIGID COUPLINGS

TUBULAR THREADED TYPE - STEEL



51



PART #	SIZE	THREADS PER INCH	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
51	1/2"	14	150	20	1.63"	1.563"
52	3/4"	14	50	9	1.64"	1.625"
53	1"	11-1/2	30	10	1.97"	2"
54	1-1/4"	11-1/2	25	10	2.03"	2.063"
55	1-1/2"	11-1/2	25	14	2.06"	2.063"
56	2"	11-1/2	20	15	2.13"	2.125"
57	2-1/2"	8	12	22	2.19"	3.125"
58	3"	8	8	18	3.31"	3.25"
59	3-1/2"	8	4	14	3.41"	3.375"
60	4"	8	4	12	3.52"	3.50"
60A	5"	8	2	11	3.95"	3.75"
60B	6"	8	3	12	4.25"	4"

FEATURES
- NPSM thread type

APPLICATIONS
- Indoor or outdoor use
- Use to join and ensure proper alignment of threaded Rigid or IMC conduit

STANDARD MATERIAL
- Steel

STANDARD FINISH
- Zinc plated

CERTIFICATIONS
- UL Standard: UL 6A
- Fed. Spec: WW-C-563
- NEMA: ANSI C80.1-2015

316 STAINLESS STEEL



RC-50SS

LISTED

PART #	MATERIAL	RIGID SIZE	MASTER QTY.
RC-50SS	316 STAINLESS STEEL	1/2"	100
RC-75SS	316 STAINLESS STEEL	3/4"	100
RC-100SS	316 STAINLESS STEEL	1"	50
RC-125SS	316 STAINLESS STEEL	1-1/4"	50
RC-150SS	316 STAINLESS STEEL	1-1/2"	25
RC-200SS	316 STAINLESS STEEL	2"	25
RC-250SS	316 STAINLESS STEEL	2-1/2"	10
RC-300SS	316 STAINLESS STEEL	3"	1
RC-350SS	316 STAINLESS STEEL	3-1/2"	1

FEATURES
- NPSM thread type

APPLICATIONS
- Joins 2 pieces of threaded Rigid/IMC conduit.

STANDARD MATERIAL
- 316 Stainless Steel

CERTIFICATIONS
- UL listed

BOXES AND COVERS

Southwire's line of steel boxes and covers is one of the largest lines in the industry.

4" Square Boxes & Covers
4-11/16" Square Boxes & Covers
5" Square Boxes & Covers
6" Boxes & Covers
Pan Boxes & Covers
4" Octagon Boxes & Covers
Ceiling Fan Support
Masonry Boxes
Handy Boxes & Covers
Switch Boxes
Multi-Gang Boxes & Covers
Life Safety Boxes & Covers
Plenum Boxes & Covers
Romex® Brand SmartBox™ Non-Metallic Boxes
Accessories
Low Voltage/Media Plates



4" SQUARE BOXES

1-1/4" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



52141-1/2

LISTED

2 HR FIRE RATED

FEATURES
- 1-1/4" deep shallow box design allows conduits to be run into shallow stud walls

APPLICATIONS
- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52141-1/2	FLAT BOTTOM	(12) 1/2"	(5) 1/2"	17.5 (286.8)	50

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



52151-1/2DR

LISTED

2 HR FIRE RATED

FEATURES
- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS
- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed



52151-3/4DR




52151-SDR



52151-BLNK



52151-BLNKSS



52151-SDRPT

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52151-1/2DR	FLAT BOTTOM	(12) 1/2"	(3) 1/2"& (2) 3/4"	21.0 (344.1)	50
52151-3/4DR	FLAT BOTTOM	(8) 3/4"	(3) 1/2"& (2) 3/4"	21.0 (344.1)	50
52151-SDR	CONCENTRIC KO'S	(6) 1/2" & (4) 1/2" - 3/4"	(3) 1/2"& (2) 3/4"	21.0 (344.1)	50
52151-BLNK *	BLANK, NO KO'S	---	---	21.0 (344.1)	50
52151-BLNKSS *	BLANK, 316 STAINLESS STEEL	---	---	21.0 (344.1)	50
52151-SDRPT	RAISED GROUND WITH 7-1/2" PIGTAIL AND GROUND SCREW	(8) 1/2" & (4) 3/4"	(2) 1/2" & (2) 3/4"	21.0 (344.1)	50

*Not UL Listed

4" SQUARE BOXES

1-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52151-1/2

LISTED

2 HR FIRE RATED



52151-3/4



52151-S



52151-SPT



52151-OW

FEATURES

- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52151-1/2	RAISED GROUND	(12) 1/2"	(2) 1/2" & (2) 3/4"	21.0 (344.1)	50
52151-3/4	RAISED GROUND	(8) 3/4"	(2) 1/2" & (2) 3/4"	21.0 (344.1)	50
52151-S	ECCENTRIC KO'S, RAISED GROUND	(8) 1/2" & (4) 1/2" - 3/4"	(2) 1/2" & (2) 3/4"	21.0 (344.1)	50
52151-SPT	ECCENTRIC KO'S, WITH 8" (12 GA) PIGTAIL INSTALLED	(8) 1/2" & (4) 1/2" - 3/4"	(2) 1/2" & (2) 3/4"	21.0 (344.1)	50
52151-OW	OLD WORK WITH EARS & CLIPS	(6) 1/2"	(2) 1/2" & (2) 3/4"	21.0 (344.1)	25

4" SQUARE BRACKETED BOXES

1-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52151-AB

LISTED

2 HR FIRE RATED



52151-F



52151-3/4F



52151-FS



52151-B



52151-MS



52151-WB



52151-SWB



52151-DWS

FEATURES

- Combination knockouts allow for greater wiring flexibility
- 52151-DWS is drawn construction
- Complete description of bracket types and features can be found at the end of this section

APPLICATIONS

- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52151-AB	STUD FACE MOUNT, ECCENTRIC KO'S	AB	(6) 1/2" & (3) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	21.0 (344.1)	25
52151-F	FLAT, STUD SIDE MOUNT	F	(9) 1/2"	(3) 1/2" & (2) 1/2" – 3/4"	21.0 (344.1)	25
52151-3/4F	FLAT, STUD SIDE MOUNT	F	(6) 3/4"	(3) 1/2" & (2) 3/4"	21.0 (344.1)	25
52151-FS	FLAT, STUD SIDE MOUNT, ECCENTRIC KO'S	F	(6) 1/2" & (3) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	21.0 (344.1)	25
52151-B	STUD FACE MOUNT, RAISED GROUND	B	(6) 1/2" & (3) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	21.0 (344.1)	25
52151-MS	METAL STUD MOUNT, ECCENTRIC KO'S	MS	(6) 1/2" & (3) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	21.0 (344.1)	25
52151-WB	WOOD STUD MOUNT WITH HOOKS	WB	(9) 1/2"	(2) 1/2" & (2) 3/4"	21.0 (344.1)	25
52151-SWB	WOOD STUD MOUNT WITH HOOKS, ECCENTRIC KO'S	WB	(6) 1/2" & (3) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	21.0 (344.1)	25
52151-DWS	STUD FACE MOUNT, OFF SET, ECCENTRIC KO'S	W	(6) 1/2" & (3) 1/2" - 3/4"	(3) 1/2" & (2) 3/4"	21.0 (344.1)	25

4" SQUARE BOXES

1-1/2" DEEP - WELDED WITH CLAMPS



52151-R



52151-BX

LISTED

2 HR FIRE RATED

FEATURES
- Complete description of bracket types and features can be found at the end of this section

APPLICATIONS
- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions


STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52151-R	NMSC CLAMPS	NMSC	(6) 1/2" & (4) NM	(1) 1/2"	21.0 (344.1)	50
52151-BX	MC/BX CLAMPS	MC/BX	(6) 1/2" & (4) MC/BX	(1) 1/2"	21.0 (344.1)	50

4" SQUARE BRACKETED BOXES

1-1/2" DEEP - WELDED WITH CLAMPS



52151-MSR

LISTED

2 HR FIRE RATED




52151-FR



52151-FBX



52151-BBX



52151-MSBX

FEATURES
- Complete description of bracket types and features can be found at the end of this section

APPLICATIONS
- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
52151-FR	FLAT, STUD SIDE MOUNT, NMSC CLAMPS	NMSC	F	(2) 1/2" & (1) 1/2" – 3/4" & (4) NM	(1) 1/2"	21.0 (344.1)	25
52151-MSR	METAL STUD MOUNT, NMSC CLAMPS	NMSC	MS	(2) 1/2" & (1) 1/2" – 3/4" & (4) NM	(1) 1/2"	21.0 (344.1)	25
52151-FBX	FLAT, STUD SIDE MOUNT, MC/BX CLAMPS	MC/BX	F	(2) 1/2" & (1) 1/2" – 3/4" & (4) MC/BX	(1) 1/2"	21.0 (344.1)	25
52151-BBX	STUD FACE MOUNT, MC/BX CLAMPS	MC/BX	B	(3) 1/2" & (4) MC/BX	(1) 1/2"	21.0 (344.1)	25
52151-MSBX	METAL STUD MOUNT, MC/BX CLAMPS	MC/BX	MS	(2) 1/2" & (1) 1/2" – 3/4" & (4) MC/BX	(1) 1/2"	21.0 (344.1)	25
52151-FBXPT	FLAT, STUD SIDE MOUNT, MC/BX CLAMPS WITH 10/32 GROUND SCREW & 7-1/2" PIGTAIL	MC/BX	F	(2) 1/2" & (1) 1/2" & 3/4" ECCENTRIC	(1) 1/2"	21.0 (344.1)	25

4" SQUARE BOXES

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



52171-1/2DR

LISTED

2 HR FIRE RATED



52171-3/4DR



52171-SDR



52171-1DR



52171-BLNK



52171-BLNKSS

FEATURES

- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52171-1/2DR	FLAT BOTTOM	(12) 1/2"	(4) 1/2"	30.3 (496.5)	25
52171-3/4DR	FLAT BOTTOM	(8) 3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-SDR	CONCENTRIC KO'S	(6) 1/2" & (6) 1/2" – 3/4"	(3) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-1DR	RAISED GROUND	(8) 1"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-BLNK *	BLANK, NO KO'S	---	---	30.3 (496.5)	25
52171-BLNKSS *	BLANK, 316 stainless steel	---	---	30.3 (496.5)	25
52171-1/2-3/4	RAISED GROUND	(8) 1/2" & (4) 3/4"	2) 1/2" & (2) 3/4"	21.0 (344.1)	24

*Not UL Listed

4" SQUARE BOXES


2-1/8" DEEP - WELDED WITH CLAMPS



52171-R



52171-BX



52171-BXPT

LISTED

2 HR FIRE RATED

FEATURES

- Complete description of bracket types and features can be found at the end of this section

APPLICATIONS

- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52171-R	NMSC CLAMPS	NMSC	(6) 1/2" & (4) NM	(1) 1/2"	30.3 (496.5)	25
52171-BX	MC/BX CLAMPS	MC/BX	(6) 1/2" & (4) MC/BX	(1) 1/2"	30.3 (496.5)	25
52171-BXPT	MC/BX CLAMPS, PIG TAIL	MC/BX	(4) 1/2" & (2) 1/2" – 3/4" & (4) MC/BX	(1) 1/2"	30.3 (496.5)	25

4" SQUARE BOXES

2-1/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52171-3/4

LISTED

2 HR FIRE RATED



52171-3/4-1



52171-1



52171-S



52171-KOR



52171-SPT



52171-OW



52171-1/2

FEATURES

- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52171-1/2	RAISED GROUND	(12) 1/2"	(4) 1/2"	30.3 (496.5)	25
52171-3/4	RAISED GROUND	(8) 3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-3/4-1	RAISED GROUND	(4) 3/4" & (4) 1"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-1	RAISED GROUND	(8) 1"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-S	RAISED GROUND, ECCENTRIC KO'S,	(8) 1/2" & (4) 1/2"-3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	50
52171-KOR	ECCENTRIC KO'S RAISED 2 SIDES FOR STEEL WALLS	(8) 1/2" & (4) 1/2"-3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-SPT	ECCENTRIC KO'S, WITH 8" (12 GA) PIGTAIL INSTALLED	(8) 1/2" & (4) 1/2"-3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-OW	OLD WORK WITH EARS & CLIPS	(8) 1/2" & (2) 3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25

4" SQUARE BRACKETED BOXES

2-1/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52171-AB

FEATURES

- Complete description of bracket types and features can be found at the end of this section

APPLICATIONS

- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed



52171-F



52171-FS



52171-MS



52171-WB




52171-SWB

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52171-AB	STUD FACE MOUNT	AB	(6) 1/2" & (3) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	30.3 (496.5)	25
52171-F	FLAT, STUD SIDE MOUNT	F	(9) 1/2"	(3) 1/2" & (2) 1/2" – 3/4"	30.3 (496.5)	25
52171-FS	FLAT, STUD SIDE MOUNT	F	(6) 1/2" &(3) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	30.3 (496.5)	25
52171-MS	METAL STUD MOUNT	MS	(4) 1/2" & (5) 1/2" – 3/4"	(3) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-WB	WOOD STUD MOUNT WITH HOOKS	WB	(9) 1/2"	(3) 1/2" & (2) 1/2" – 3/4"	30.3 (496.5)	25
52171-SWB	WOOD STUD MOUNT WITH HOOKS	WB	(4) 1/2" & (5) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	30.3 (496.5)	25

4" SQUARE BRACKETED BOXES

2-1/8" DEEP - WELDED WITH CLAMPS

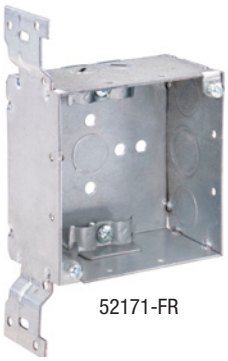

52171-FR

LISTED

2 HR FIRE RATED

FEATURES

- Complete description of bracket types and features can be found at the end of this section

APPLICATIONS


- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed



52171-MSR



52171-FBX



52171-MSBX



52171-BBX



52171-FBXPT

PART #	DESCRIPTION	CLAMP TYPE	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
52171-FR	FLAT, STUD SIDE MOUNT, NMSC CLAMPS	NMSC	F	(2) 1/2" & (1) 1/2" – 3/4" & (4) NM	(1) 1/2"	30.3 (496.5)	25
52171-MSR	METAL STUD MOUNT, NMSC CLAMPS	NMSC	MS	(3) 1/2" & (4) NM	(1) 1/2"	30.3 (496.5)	25
52171-FBX	FLAT, STUD SIDE MOUNT, MC/BX CLAMPS	MC/BX	F	(2) 1/2" & (1) 1/2" – 3/4"& (4) MC/BX	(1) 1/2"	30.3 (496.5)	25
52171-MSBX	METAL STUD MOUNT, MC/BX CLAMPS	MC/BX	MS	(2) 1/2"& (1) 1/2" – 3/4" & (4) MC/BX	(1) 1/2"	30.3 (496.5)	25
52171-BBX	STUD FACE MOUNT, MC/BX CLAMPS	MC/BX	B	(2) 1/2" & (1) 1/2" – 3/4" & (4) MC/BX	(1) 1/2"	30.3 (496.5)	25
52171-FBXPT	FLAT, STUD SIDE MOUNT, MC/BX CLAMPS, PIGTAIL	MC/BX	F	(2) 1/2" & (1) 1/2"– 3/4" & (4) MC/BX	(1) 1/2"	30.3 (496.5)	25

4" SQUARE BOXES

3-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52181-3/4



52181-3/4-1



52181-1



52181-S



52181-OW



52181-BLNK



52181-VTBAR

FEATURES

- 3-1/2" deep box allows for additional wiring capacity
- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS


- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52181-3/4	RAISED GROUND	(8) 3/4"	(2) 1/2" & (2) 3/4"	50.0 (819.4)	25
52181-3/4-1	RAISED GROUND, CONCENTRIC KO'S	(4) 1" & (4) 3/4 – 1"	(2) 1/2" & (2) 3/4"	50.0 (819.4)	25
52181-1	RAISED GROUND	(8) 1"	(2) 1/2" & (2) 3/4"	50.0 (819.4)	10
52181-S	RAISED GROUND, CONCENTRIC KO'S,	(4) 1/2" – 3/4" & (2) 1/2" & (2) 3/4"	(2) 1/2" & (2) 3/4"	50.0 (819.4)	25
52181-OW	CONCENTRIC KO'S, OLD WORK WITH EARS & CLIPS	(8) 1/2" & (4) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	50.0 (819.4)	10
52181-BLNK *	BLANK, NO KO'S	---	---	50.0 (819.4)	10
52181-VTBAR	4" SQUARE BOX WITH ADJUSTABLE 24" T-BAR FOR DROP CEILINGS	(4) 1/2" & (2) 3/4"	(2) 1/2" & (2) 3/4"	50.0 (819.4)	10

*Not UL Listed

4" SQUARE BRACKETED BOXES

3-1/2" DEEP- WELDED WITH CONDUIT KNOCKOUTS



52181-AB



52181-FS

LISTED

2 HR FIRE RATED

FEATURES

- 3-1/2" deep box allows for additional wiring capacity
- Combination knockouts allow for greater wiring flexibility
- Complete description of bracket types and features can be found at the end of this section
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52181-AB	CONCENTRIC KO'S, STUD FACE MOUNT	AB	(4) 1/2" – 3/4", (2) 3/4", (2) 1"	(2) 1/2" & (2) 3/4"	50.0 (819.4)	10
52181-FS	CONCENTRIC KO'S, FLAT, STUD SIDE MOUNT	F	(5) 1/2" & (5) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	50.0 (819.4)	10

4" SQUARE BOXES

4" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52191-BLNK



52191-3/4



52191-1



52191-S



52191-OW

FEATURES

- 4" deep box allows for additional wiring capacity
- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52191-BLNK *	BLANK, NO KO'S	---	---	56.0 (917.7)	10
52191-3/4	RAISED GROUND	(8) 3/4"	(2) 1/2" & (2) 3/4"	56.0 (917.7)	25
52191-1	RAISED GROUND	(8) 1"	(4) 1/2" – 3/4", (2) 3/4", (2) 1"	56.0 (917.7)	10
52191-S	RAISED GROUND, CONCENTRIC KO'S,	(4) 1/2" – 3/4", (2) 1/2", (2) 3/4"	(2) 1/2" & (2) 3/4"	56.0 (917.7)	25
52191-OW	CONCENTRIC KO'S, OLD WORK WITH EARS & CLIPS	(2) 1/2" & (2) 3/4"	(6) 1/2" & (6) 1/2" – 3/4"	56.0 (917.7)	10

*Not UL Listed

4" SQUARE EXTENSION RINGS

1-1/4" DEEP - WELDED WITH CONDUIT KNOCKOUTS



53141-1/2

FEATURES

- Combination Phillips/Slotted screw head

APPLICATIONS

- 4" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
53141-1/2	STANDARD EXTENSION RING	WELDED	(12) 1/2"	18.0 (295.0)	50

4" SQUARE EXTENSION RINGS

1-1/2" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS



53141-1/2



53151-3/4



53151-S



53151-SUB



53151-BLNK

FEATURES

- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
53151-1/2	STANDARD EXTENSION RING	WELDED	(12) 1/2"	21.0 (344.1)	50
53151-3/4	STANDARD EXTENSION RING	WELDED	(8) 3/4"	21.0 (344.1)	50
53151-S	CONCENTRIC KO'S, STANDARD EXTENSION RING	WELDED	(6) 1/2" & (6) 1/2" – 3/4"	21.0 (344.1)	50
53151-SUB	3" x 2" SWITCH BOX TO 4" SQ. CONVERSION RING	WELDED	(6) 1/2" & (6) 1/2" – 3/4"	21.0 (344.1)	50
53151-BLNK	BLANK, NO KO'S	DRAWN	---	21.0 (344.1)	50

4" & 4-11/16" SQUARE SPLIT EXTENSION RINGS

1-1/2" AND 2-1/8" DEEP
DRAWN WITH CONDUIT KNOCKOUTS


53151-1/2SPL


53151-SSPL


73151-SSPL

LISTED

FEATURES
- Combination Phillips/Slotted screw heads
- Two-piece split design

APPLICATIONS
- 4" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Split design allows for greater flexibility. There is no need to disconnect wiring already in place when adding a ring. Also allows easier access to the back of the box when pulling wire.

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	DEPTH	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
53151-1/2SPL	SPLIT EXTENSION RING	1-1/2"	(12) 1/2"	21.0 (344.1)	50
53151-SSPL	SPLIT EXTENSION RING	1-1/2"	(8) 1/2" & (4) 3/4"	21.0 (344.1)	50
73151-SSPL	SPLIT EXTENSION RING	1-1/2"	(6) 1/2" & (4) 3/4"	29.5 (483.4)	25

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS


53171-SSPL


73171-SSPL

LISTED

FEATURES
- Combination Phillips/Slotted screw heads
- Two-piece split design

APPLICATIONS
- 4" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Split design allows for greater flexibility. There is no need to disconnect wiring already in place when adding a ring. Also allows easier access to the back of the box when pulling wire.

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	DEPTH	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
53171-SSPL	ECCENTRIC KO'S, SPLIT EXTENSION RING	2-1/8"	(6) 1/2" & (6) 1/2" – 3/4"	30.3 (496.5)	50
73171-SSPL	SPLIT EXTENSION RING	1-1/2"	(6) 1/2" & (4) 3/4"	29.5 (483.4)	25

4" SQUARE EXTENSION RINGS

2-1/8" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS



53171-3/4

LISTED



53171-1



53171-S



53171-SUB



53171-A45



53171-BLNK

FEATURES

- 53171-A45 is used in pitched ceiling applications
- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" Square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
53171-3/4	STANDARD EXTENSION RING	DRAWN	(8) 3/4"	30.3 (496.5)	25
53171-1	STANDARD EXTENSION RING	DRAWN	(8) 1"	30.3 (496.5)	25
53171-S	CONCENTRIC KO'S, STANDARD EXTENSION RING	WELDED	(8) 1/2" & (4) 1/2"-3/4"	30.3 (496.5)	25
53171-SUB	3" x 2" SWITCH BOX TO 4" SQ. CONVERSION RING	WELDED	(8) 1/2" & (4) 1/2"-3/4"	30.3 (496.5)	50
53171-A45*	28.2 DEG ANGLE, SLOPE: .875" RISE TO 2.85" RISE	WELDED	---	21.0 (344.1)	10
53171-BLNK*	BLANK, NO KO'S	DRAWN	---	30.3 (496.5)	25

*Not UL Listed

BOX EXTENDER - WELDED



BEX-450



BEX-475



BEX-4100

FEATURES

- Special application product available in this extension ring style/depth

APPLICATIONS

- 4" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
BEX-450	4" SQ BOX EXT, 1/2" RAISED TO FINISH SURFACE	WELDED	---	6.75 (110.6)	25
BEX-475	4" SQ BOX EXT, 3/4" RAISED TO FINISH SURFACE	WELDED	---	10.6 (173.7)	25
BEX-4100	4" SQ BOX EXT, 1" RAISED TO FINISH SURFACE	WELDED	25	14.5(237.6)	50

4" SQUARE COVERS

INDUSTRIAL EXPOSED WORK, RAISED 1/2"



G1929

FEATURES

- Crushed corner design allows use of standard box cover screws
- Device mounting hardware included

APPLICATIONS

- 4" square, 1/2 in raised exposed work covers are used to close a 4" square junction box or to attach a device(s) in a surface mount industrial or commercial setting

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL, cULus Listed



G1930



G1938



G1939



G1935



BP-1935



BPO-1935



G1936



BP-1936



BPO-1936



G1947



G1950



G1941



G1948



G1951



G1932



G1944



G1942



G1943



G1949



G1933



G1937



G1940



G1952



G1929-SS



G1938-SS



G1939-SS



G1935-SS



G1947-SS



G1950-SS



G1953



C3452



C3453



C3454

PART #	DEVICE OPENING(S)	CUBIC INCHES (CM^3)	MASTER QTY.
G1929	BLANK	7.0 (114.8)	50
G1930	1/2" KO CENTERED	7.0 (114.8)	50
G1938	(1) DUPLEX	7.0 (114.8)	50
G1939	(2) DUPLEX	7.0 (114.8)	50
G1935	(1) TOGGLE	7.0 (114.8)	50
BP-1935	(1) TOGGLE, GAS BURNER, RED	7.0 (114.8)	25
BPO-1935	(1) TOGGLE, OIL BURNER, RED	7.0 (114.8)	25
G1936	(2) TOGGLES	7.0 (114.8)	50
BP-1936	(2) TOGGLES, GAS BURNER, RED	7.0 (114.8)	25
BPO-1936	(2) TOGGLES, OIL BURNER, RED	7.0 (114.8)	25
G1947	(1) DECORATOR & GFCI	7.0 (114.8)	50
G1950	(2) DECORATOR/GFCI	7.0 (114.8)	50
G1941	(1) TOGGLE & (1) DUPLEX	7.0 (114.8)	50
G1948	(1) TOGGLE, & (1) DECORATOR/GFCI	7.0 (114.8)	50
G1951	(1) DUPLEX & (1) DECORATOR/GFCI	7.0 (114.8)	50
G1932	(1) 1.406" DIAMETER	7.0 (114.8)	50
G1944	(1) 30-50A 2.141" DIAMETER	7.0 (114.8)	50
G1942	(1) 20A 1.594"DIAMETER	7.0 (114.8)	50
G1943	(1) 30A 1.719" DIAMETER	7.0 (114.8)	50
G1949	(1) 30-60A 2.441" DIAMETER	7.0 (114.8)	50
G1933	(2) 1.406"DIAMETER	7.0 (114.8)	50
G1937	(1) 1.406" DIAMETER & (1) TOGGLE	7.0 (114.8)	50
G1940	(1) 1.406" DIAMETER & (1) DUPLEX	7.0 (114.8)	50
G1952	(1) 1.406" DIAMETER & (1) DECORATOR/GFCI	7.0 (114.8)	50
G1929-SS	BLANK, 316 STAINLESS STEEL	6.5 (106.5)	50
G1938-SS	(1) DUPLEX, 316 STAINLESS STEEL	6.5 (106.5)	50
G1939-SS	(2) DUPLEX, 316 STAINLESS STEEL	6.5 (106.5)	50
G1935-SS	(1) TOGGLE, STAINLESS STEEL	6.5 (106.5)	50
G1947-SS	(1) DECORATOR & GFCI, 316 STAINLESS STEEL	6.5 (106.5)	50
G1950-SS	(2) DECORATOR/GFCI, 316 STAINLESS STEEL	6.5 (106.5)	50
G1953	(2) 1.60" DIAMETER	7.0(114.8)	50
C3452	(1) TOGGLE & (1) DUPLEX	6.6 (108.5)	50
C3453	(1) 1.406" DIAMETER & (1) DUPLEX	6.6 (108.5)	50
C3454	(1) DUPLEX	6.6 (108.5)	50
G1943-U	UNIVERSAL 1 DEVICE: 1.79", 1.59" OR 1.406" DIAMETER HOLE	7.0 (114.8)	10
G1947-U	UNIVERSAL 2 DEVICE: 2 GFCI, 2 TOGGLE, 2 DUPLEX	7.0 (114.8)	10
G1950-U	UNIVERSAL 1 DEVICE: GFCI, TOGGLE, DUPLEX	7.0 (114.8)	10

4" SQUARE FLAT COVERS



52C1



52C6

UL LISTED c UL us LISTED

FEATURES
- Keyhole mounting holes for easy installation
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS
- 4" square blank flat covers are used to en close a 4" square box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
52C1	BLANK	50
52C6	1/2" KNOCKOUT IN CENTER	50

4" SQUARE DEVICE EXTENDER RINGS

SINGLE AND DOUBLE DEVICE



DEX-150



DEX-250

FEATURES
- 2" long 6-32 mounting screws provided
- Mounting provisions allow ring to be quickly and easily installed to a wall box or existing device ring
- Rugged steel construction ensures solid mounting and also seals the box against the back of the drywall, tile, or plaster preventing energy loss due to air infiltration

APPLICATIONS
- Device Extender Rings are mounted to existing device rings and switch boxes that are set back in the wall .56" or more
- Unique design allows devices to be raised flush with finished wall surface

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	FOR RAISED DEVICE COVERS	MASTER QTY.
DEX-150	ONE DEVICE, EXTENDER, INCL. 6-32 HARDWARE	.56"	50
DEX-175		.81"	50
DEX-250	TWO DEVICE, EXTENDER, INCL. 6-32 HARDWARE	.56"	25
DEX-275		.81"	25

4" SQUARE SINGLE DEVICE RINGS



52C62A

UL LISTED c UL us LISTED

FEATURES
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS
- 4" square single device rings are used with 4" square boxes to mount switches, receptacles and devices

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL, cULus Listed



52C14-5/8



52C2-5/8



52C16



52C26

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
52C62A	FOR DRYWALL	FLAT	---	50
52C62	FOR DRYWALL	1/4"	1.5 (24.6)	50
52C13	FOR DRYWALL	1/2"	3.5 (57.3)	50
52C14-5/8	FOR DRYWALL	5/8"	4.5 (73.7)	50
52C14	FOR DRYWALL	3/4"	5.5 (90.1)	50
52C15	FOR DRYWALL	1"	7.5 (122.9)	25
52C16	FOR DRYWALL	1-1/4"	8.5 (139.3)	25
52C22	FOR DRYWALL	1-1/2"	11.3 (185.2)	25
52C23	FOR DRYWALL	2"	14.5 (237.6)	25
52C26	FOR DRYWALL OR TILE *	2-1/2"	16.0 (262.1)	25
52C28	FOR DRYWALL OR TILE *	3-1/2"	22.5 (368.7)	25
52C62A-SS	FOR DRYWALL FINISH , 316 STAINLESS STEEL	FLAT	---	50
52C62-SS		1/4"	1.5 (24.6)	50
52C13-SS		1/2"	3.5 (57.3)	50
52C14-SS		3/4"	4.5 (73.7)	50
52C15-SS		1"	7.5 (122.9)	25
52C16-SS		1-1/4"	7.5 (122.9)	25
52C22-SS		1-1/2"	11.3 (185.2)	25
52C23-SS		2"	14.5 (237.6)	25

*From UL Listed components

4" SQUARE SINGLE GANG DEVICE RINGS



52C22SQ

LISTED

c LISTED us

FEATURES
- 90°, welded corners
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members


APPLICATIONS
- 4"square single device rings are used with 4" square boxes to mount switches, receptacles and devices
- 90° square corners allow for easy, clean tile installation

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
52C13SQ	FOR TILE FINISH	1/2"	3.5 (57.3)	50
52C14SQ		3/4"	5.5 (90.1)	50
52C15SQ		1"	7.5 (122.9)	25
52C16SQ		1-1/4"	7.5 (122.9)	25
52C22SQ		1-1/2"	11.3 (185.2)	25
52C23SQ		2"	14.5 (237.6)	25

ADJUSTABLE



AMR158



AMR1



AMR0

LISTED

FEATURES
- Adjustable device rings allow a perfect flush installation to finished surfaces, ensuring that devices are securely fastened and well grounded to rings
- Telescoping one gang inner ring adjusts to finished wall surface for a perfect fit every time
- Great for prefabricated assemblies

APPLICATIONS
- 4" square adjustable single device rings are used with 4" square boxes to mount switches, receptacles and devices
- Adjustable device rings are used in ceilings, walls and floors when finished surface depth is unknown

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	DEPTH ADJUSTMENT	MASTER QTY.
AMR158	4" SQUARE, SINGLE DEVICE ADJUSTABLE	5/8" TO 1-1/4"	25
AMR1	4" SQUARE, SINGLE DEVICE ADJUSTABLE	3/4" TO 1-1/2"	25
AMR0	4" SQUARE TO 3-1/2" ROUND, 2-3/4" ON CENTER FIXTURE EARS ADJUSTABLE	3/4" TO 1-1/2"	25

4" SQUARE SINGLE GANG DEVICE RINGS

OFFSET FOR TRIM MOLDINGS



52C11

UL LISTED c UL us LISTED

FEATURES

- Offset device ring design positions wiring device away from finish trim moldings
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS

- 4" square single device rings are used with 4" square boxes to mount switches, receptacles and devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
52C09	FLAT	---	---	25
52C10	RAISED	1/4"	1.5 (24.6)	25
52C11	RAISED	1/2"	3.5 (57.3)	25
52C12	RAISED	5/8"	4.5 (73.7)	25
52C12-3/4	RAISED	3/4"	5.5 (90.1)	25
52C12-1	RAISED	1"	7.5 (122.9)	25

4" SQUARE SINGLE GANG EXTRA SLIM DEVICE RING

5/8" RAISED



52C2-5/8

FEATURES

- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS


- 4" square single device rings are used with 4" square boxes to mount switches, receptacles and devices
- Eliminates the need for a backplate when using narrow fixtures or devices

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	RAISED	MASTER QTY.
52C2-5/8	RAISED	5/8"	50

4" SQUARE DOUBLE GANG DEVICE RINGS



52C20A



52C18-5/8



52C19



52C25

FEATURES

- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS

- 4" square two device rings are used with 4" square boxes to mount switches, receptacles and devices

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL, cULus Listed

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
52C20A	FOR DRYWALL FINISH	FLAT	---	50
52C20		1/4"	3.0 (49.2)	50
52C17		1/2"	5.5 (90.1)	50
52C18-5/8		5/8"	7.3 (119.6)	50
52C18		3/4"	8.8 (144.2)	50
52C19		1"	12.0 (196.6)	25
52C21		1-1/4"	15.0 (245.8)	25
52C24		1-1/2"	15.5 (253.9)	25
52C25		2"	20.5 (335.9)	25
52C20A-SS	FOR DRYWALL FINISH, 316 STAINLESS STEEL	FLAT	---	50
52C20-SS		1/4"	3.0 (49.2)	50
52C17-SS		1/2"	5.5 (90.1)	50
52C18-SS		3/4"	7.3 (119.6)	50
52C21-SS		1-1/4"	15.0 (245.8)	25
52C24-SS		1-1/2"	15.5 (253.9)	25

4" SQUARE DOUBLE GANG DEVICE RINGS

ADJUSTABLE



AMR2

UL LISTED

FEATURES
- Adjustable device rings allow a perfect flush installation to finished surfaces, ensuring that devices are securely fastened and well grounded to rings
- Telescoping two gang inner ring adjusts to finished wall surface for a perfect fit every time
- Great for prefabricated assemblies

APPLICATIONS
- 4" square adjustable two device rings are used with 4" square boxes to mount switches, receptacles and devices
- Adjustable device rings are used in ceilings, walls and floors when finished surface depth is unknown

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	DEPTH ADJUSTMENT	MASTER QTY.
AMR2	4" SQUARE, TWO DEVICE ADJUSTABLE	3/4" TO 1-1/2"	25

90° CORNERS FOR TILE



52C17SQ

UL LISTED c UL us LISTED

FEATURES
- 90°, welded corners
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS
- 4" square two device rings are used with 4" square boxes to mount switches, receptacles and devices
- 90° square corners allow for easy, clean tile installation

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
52C17SQ	FOR TILE FINISH	1/2"	5.5 (90.1)	50
52C18SQ		3/4"	8.8 (144.2)	50
52C19SQ		1"	12.0 (196.6)	25
52C21SQ		1-1/4"	15.0 (245.8)	25
52C24SQ		1-1/2"	15.5 (253.9)	25
52C25SQ		2"	20.5 (335.9)	25

4" SQUARE DEVICE RING PARTITIONS



LVP41

FEATURES

- Score lines guide for proper fit with device ring
- To prevent breaking off too many scored tabs it is recommended that the partition is in place in the box before the scored tab is broken off

APPLICATIONS

- Device partitions are used when low voltage and power devices are installed next to each other in one 4" square box
- Partitions separate line voltage and low voltage into their own compartments, preventing any harmful interference that power devices can induce in low voltage devices that are installed next to them

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	FOR RAISED DEVICE COVERS	MASTER QTY.
LVP41	FOR BOX DEPTH 1-1/2"	1/2", 3/4", 1"	50
LVP42		5/8", 1-1/4", 1-1/2", 2"	50
LVP41D	FOR BOX DEPTH 2-1/8"	1/2", 3/4", 1"	50
LVP42D		5/8", 1-1/4", 1-1/2", 2"	50

4" SQUARE TO OCTAGON FIXTURE RINGS



52C4-5/8

UL LISTED c UL us LISTED

FEATURES
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members
- Patent #10,027,099
- Not rated for ceiling fan support, static fixture load only

APPLICATIONS
- 4" square to octagon raised device rings are used to mount light fixtures in walls and ceilings
- Rings convert a 4" square box to a 4" octagon opening with 8-32 threaded mounting tabs for lighting retrofit applications
- Octagon design allows additional space for LED drivers that do not fit in traditional square to round rings

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	RAISED	ON CENTER FIXTURE EARS	CUBIC INCHES (CM^3)	MASTER QTY.
52C4-F	4" SQUARE TO 4" OCTAGON	FLAT	3-1/2"	---	50
52C4-1/2		1/2"		6.0 (98.4)	25
52C4-5/8		5/8"		6.5 (106.6)	25
52C4-3/4		3/4"		8.7 (142.6)	50
52C4-1		1"		11.4 (186.9)	25
52C4-1-1/4		1-1/4"		14.0 (229.5)	50

ADJUSTABLE



AMR-52C4

FEATURES
- Telescoping inner ring adjusts to finished wall surface for a perfect fit
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members
- Fixture Ears 3-1/2" O.C.
- Not rated for ceiling fan support, static fixture load only

APPLICATIONS
- 4-11/16" square to octagon rings are used to mount light fixtures in walls and ceilings
- Rings convert a 4-11/16" box to a 4" octagon opening with 8-32 threaded mounting tabs for lighting applications
- Octagon design allows additional space for LED drivers that do not fit in traditional square to round rings

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	CUBIC INCHES (CM^3)	MASTER QTY.
AMR-52C4	4" SQUARE TO OCTAGON	5/8 TO 1-1/4	10

4" SQUARE TO ROUND FIXTURE RINGS



52C3-F



52C3-5/8



52C3-2

FEATURES

- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members
- Not rated for ceiling fan support, static fixture load only
- Fixture Ears 2-3/4" on center

APPLICATIONS

- 4" square to round raised device rings are used to mount light fixtures in walls and ceilings
- Rings convert a 4" square box to a 3-1/2" round opening with 8-32 threaded mounting tabs for lighting retrofit applications

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed

PART #	DESCRIPTION	RAISED	O.C FIXTURE EARS	CUBIC INCHES (CM^3)	MASTER QTY.
52C3-F	4" SQUARE TO 3-1/2" ROUND	FLAT	2-3/4"	---	50
52C3		1/2"		3.3 (54.1)	50
52C3-5/8		5/8"		4.3 (70.5)	50
52C3-3/4		3/4"		5.8 (95.1)	50
52C3-1		1"		6.8 (111.5)	50
52C3-1-1/4		1-1/4"		9.5 (155.7)	25
52C3-1-1/2		1-1/2"		10.3 (168.8)	25
52C3-2		2"		13.5 (221.3)	25

SOUTHWIRE "UNIVERSAL DESIGN"



52C3-1/2U

FEATURES

- Universal Rings feature fixture holes on both 2-3/4" or 3-1/2" centers and will accommodate 5/8" or 3/4" tile, drywall or plaster
- Multiple 8-32 mounting hole pattern assures a perfect alignment of mounted fixture
- Not rated for ceiling fan support

APPLICATIONS

- 4" square to round raised Universal Rings are used to mount lights, security camer as, exit signs, speakers, emergency lights and any other lighting fixtures

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed

PART #	DESCRIPTION	RAISED	O.C FIXTURE EARS	CUBIC INCHES (CM^3)	MASTER QTY.
52C3-1/2U	4" SQUARE TO 4" ROUND, UNIVERSAL COVER	1/2"	2-3/4" OR 3-1/2"	5.0 (81.9)	50
52C3-5/8U		5/8"		6.5 (106.6)	50
52C3-3/4U		3/4"		7.8 (127.9)	50

4" SQUARE TO ROUND FIXTURE RINGS

SOUTHWIRE "PERFECT FIT DESIGN"



EXR-F



EXR-5/8



EXR-2

FEATURES

- Dual-direction 8-32 device mounting tabs allow the installer to obtain a perfect fit for signal, lighting and security cameras without having to disassemble canopies fixture
- Not ceiling fan support rated (Static fixture load only)
- Fixture Ears 2-3/4" on center

APPLICATIONS

- 4" square to round raised Perfect Fit rings are mounted in ceiling or wall applications where proper alignment of any device or fixture is needed with canopy installed
- They are typically used on exit signs, emergency lights, ceiling fixtures, security cameras, wall sconce lights and electronic devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed

UL LISTED c UL us LISTED

PART #	DESCRIPTION	RAISED	O.C FIXTURE EARS	CUBIC INCHES (CM^3)	MASTER QTY.
EXR-F	4" SQUARE TO 4" ROUND, PERFECT FIT	FLAT	2-3/4"	---	25
EXR-1/2		1/2"		3.3 (54.1)	25
EXR-5/8		5/8"		4.3 (70.5)	25
EXR-3/4		3/4"		5.0 (81.9)	25
EXR-1		1"		6.8 (111.5)	25
EXR-1-1/4		1-1/4"		8.5 (139.3)	25
EXR-1-1/2		1-1/2"		10.3 (168.8)	25
EXR-2		2"		13.5 (221.3)	25

4" SQUARE STATIONARY FIXTURE HANGERS



52C50

FEATURES

- Mounting slots allow for fast installation
- Threaded fixture stem affixed to cover

APPLICATIONS

- 4" square fixture covers are used to hang commercial or industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/electronic devices from overhead ceiling installations
- Perfect for commercial or industrial applications where the pipe stem or fixture is not subjected to motion or vibration


CERTIFICATIONS

- Made from UL Listed components

PART #	DESCRIPTION	CONDUIT SIZE	MASTER QTY.
52C50	STATIONARY, WILL NOT SWING OR ROTATE, ZINC PLATED	1/2"	25
52C75		3/4"	25

4" SQUARE SWIVEL FIXTURE HANGERS

20° MAX SWING FROM VERTICAL



SC-5075HF



SC-50



SC-75



34S

UL LISTED

c UL us LISTED

FEATURES

- Keyhole slots allow for fast installation
- SC-5075HF features hinged door design that allows the installer to mount the cover on box and hang fixtures in one easy step
- Wire termination can be completed with the or open reducing time and labor expenses
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" square swivel fixture hangers are used to hang commercial or industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/electronic devices from overhead ceiling installations
- Perfect for commercial or industrial applications where the pipe stem or fixture might be subjected to motion or vibration

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed, E22445

PART #	DESCRIPTION	FITS CONDUIT	MASTER QTY.
SC-5075HF	HANDS-FREE DESIGN FOR WIRING OF FIXTURE	1/2" OR 3/4"	10
SC-50	STANDARD TYPE	1/2" ONLY	25
SC-75	STANDARD TYPE	3/4" ONLY	25
34S	STANDARD TYPE	1/2" OR 3/4"	25

4-11/16" SQUARE BOXES

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



72151-S



72151-3/4

UL LISTED

FEATURES

- Southwire 1-1/2" deep design allows conduits to be run into shallow stud walls
- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4-11/16" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
72151-S	CONCENTRIC KO'S, RAISED GROUND	(8) 1/2" & (4) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	29.5 (483.3)	25
72151-3/4	FLAT BOTTOM	(12) 3/4"	(3) 1/2" & (2) 3/4"	29.5 (483.3)	25

4-11/16" SQUARE BOXES

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



72171-BLNK



72171-1/2



72171-3/4



72171-S



72171-3/4-1



72171-1



72171-1-1/4



72171-BLNKSS



72171-1/2-3/4E

FEATURES

- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4-11/16" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
72171-BLNK*	BLANK, NO KO'S	---	---	42.0 (688.2)	25
72171-1/2	FLAT BOTTOM	(12) 1/2"	(2) 1/2" & (2) 3/4"	42.0 (688.2)	25
72171-3/4	FLAT BOTTOM	(12) 3/4"	(2) 1/2" & (2) 3/4"	42.0 (688.2)	25
72171-S	FLAT BOTTOM, CONCENTRIC KO'S,	(8) 1/2" & (4) 1/2" -3/4"	(2) 1/2" & (2) 3/4"	42.0 (688.2)	25
72171-3/4-1	RAISED GROUND	(6) 3/4"& (4) 1" OPP SIDES	(2) 1/2" & (2) 3/4"	42.0 (688.2)	25
72171-1	RAISED GROUND	(8) 1"	(2) 1/2" & (2) 3/4"	42.0 (688.2)	25
72171-1-1/4	RAISED GROUND	(4) 1 – 1/4" & (4) 1"	(2) 1/2" & (2) 3/4"	42.0 (688.2)	25
72171-BLNKSS	BLANK, 316 STAINLESS STEEL	---	---	42.0 (688.2)	25
72171-1/2-3/4E	RAISED GROUND, CONCENTRIC KO'S	(4) 1/2", (6) 1/2" & 3/4" CONCENTRIC	(2) 1/2", (2) 1/2" & 3/4" CONCENTRIC	42.0(688.2)	20

*Not UL Listed

4-11/16" SQUARE BOXES

2-1/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



72171-BLNKW

LISTED

FEATURES

- Combination knockouts allow for greater wiring flexibility

APPLICATIONS

- 4-11/16" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed



72171-1/2W



72171-3/4W



72171-3/4-1W



72171-1W



72171-SW



72171-1-1/4W



72171-SWPT

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
72171-BLNKW*	BLANK	---	---	42.0 (688.2)	25
72171-1/2W	RAISED GROUND	(12) 1/2"	(2) 1/2", (2) 3/4"	42.0 (688.2)	25
72171-3/4W	RAISED GROUND	(12) 3/4"	(2) 1/2", (2) 3/4"	42.0 (688.2)	25
72171-3/4-1W	RAISED GROUND	(6) 3/4", (4) 1"	(2) 1/2", (2) 3/4"	42.0 (688.2)	25
72171-1W	RAISED GROUND	(8) 1"	(2) 1/2", (2) 3/4"	42.0 (688.2)	25
72171-SW	RAISED GROUND, CONCENTRIC KO'S	(2) 1/2", (10) 1/2"-3/4"	(2) 1/2", (2) 3/4"	42.0 (688.2)	25
72171-1-1/4W	RAISED GROUND	(4) 1-1/4", (4) 1"	(2) 1/2", (2) 3/4"	42.0 (688.2)	25
72171-SWPT	RAISED GROUND, 10/32 GROUND SCREW & 7-1/2" PIGTAIL	(12) 1/2" & 3/4" ECC	(2) 1/2", (2) 1/2" & 3/4" ECC	42.0(688.2)	20

*Not UL Listed

4-11/16" SQUARE BOXES

2-1/8" DEEP - WELDED WITH CLAMPS



72171-BXW

LISTED

FEATURES
- Combination knockouts allow for greater wiring flexibility

APPLICATIONS
- 4-11/16" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
72171-BXW	CONCENTRIC KO'S, MC/BX CLAMPS	MC/BX	(6) 1/2" – 3/4" & (4) MC/BX	(3) 1/2" & (2) 3/4"	42.0 (688.2)	25

4-11/16" SQUARE BRACKETED BOXES

2-1/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



72171-FSW



72171-MSW

LISTED

FEATURES
- Combination knockouts allow for greater wiring flexibility

APPLICATIONS
- 4-11/16" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed


PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
72171-FSW	CONCENTRIC KO'S, FLAT, STUD SIDE MOUNT	F	(2) 1/2",(7) 1/2" - 3/4"	(2) 1/2", (2) 3/4"	42.0 (688.2)	25
72171-MSW	CONCENTRIC KO'S, METAL STUD MOUNT	MS	(2) 1/2", (7) 1/2" - 3/4"	(2) 1/2", (2) 3/4"	42.0 (688.2)	25

4-11/16" SQUARE BRACKETED BOXES

2-1/8" DEEP - WELDED WITH CLAMPS



72171-FBXW



72171-MSBXW

LISTED

FEATURES
- Combination knockouts allow for greater wiring flexibility

APPLICATIONS
- 4-11/16" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
72171-FBXW	CONCENTRIC KO'S, FLAT, STUD SIDE MOUNT, MC/BX CLAMPS	MC/BX	F	(6) 1/2" - 3/4", (4) MC/BX	(3) 1/2", (2) 3/4"	42.0 (688.2)	25
72171-MSBXW	CONCENTRIC KO'S, METAL STUD MOUNT, MC/BX CLAMPS	MC/BX	MS	(3) 1/2" - 3/4", (4) MC/BX	(3) 1/2", (2) 3/4"	42.0 (688.2)	25

4-11/16" SQUARE BOXES

3" DEEP - WELDED WITH CONDUIT KNOCKOUTS



72181-BLNK

LISTED



72181-3/4



72181-S



72181-1



72181-1-1/4



72181-1-1/2

FEATURES
- Combination knockouts allow for greater wiring flexibility
- 3" depth allows for additional wiring capacity

APPLICATIONS
- 4-11/16" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
72181-BLNK*	BLANK	---	---	60.0 (983.3)	25
72181-3/4	RAISED GROUND	(12) 3/4"	(2) 1/2", (2) 3/4"	60.0 (983.3)	25
72181-S	RAISED GROUND, CONCENTRIC KO'S	(6) 1/2", (6) 1/2" - 3/4"	(2) 1/2", (2) 3/4"	60.0 (983.3)	25
72181-1	RAISED GROUND	(8) 1"	(2) 1/2", (2) 3/4"	60.0 (983.3)	25
72181-1-1/4	RAISED GROUND	(8) 1-1/4"	(2) 1/2", (2) 3/4"	60.0 (983.3)	20
72181-1-1/2	RAISED GROUND	(4) 1-1/2"	(2) 1/2", (2) 3/4"	60.0 (983.3)	20

*Not UL Listed

4-11/16" SQUARE BOXES

FOR DATA CABLE, 3" DEEP- WELDED WITH CONDUIT KNOCKOUTS



72181-DTA



72181-DTAB

UL LISTED

FEATURES

- Combination knockouts allow for greater wiring flexibility
- 3" depth allows for additional wiring capacity
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- Southwire 4-11/16" data boxes are used for audio, video, data and power applications, providing plenty of space for Cat 6A and fiber optic cable bends

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
72181-DTA	RAISED GROUND	---	(2) 1/2" – 3/4", (2) 1" – 1-1/4", (2) 1", 1-1/4 -1-1/2" & 2"	(2) 1/2" - CONCENTRIC (2) 1/4" & 1"	60.0 (983.3)	10
72181-DTAB	STUD FACE MOUNT	AB	(2) 1/2" – 3/4", (2) 1" – 1-1/4", (2) 1", 1-1/4 – 1-1/2" & 2"	(2) 1/2" - CONCENTRIC (2) 1/4" & 1"	60.0 (983.3)	10

4-11/16" SQUARE EXTENSION RINGS

1-1/2" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS



73151-S



73151-SW

UL LISTED

FEATURES

- Combination knockouts allow for greater wiring flexibility

APPLICATIONS

- 4-11/16" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT		
73151-S	STANDARD EXTENSION RING, CONCENTRIC KO'S	DRAWN	(2) 1/2" & (10) 1/2" - 3/4"	29.5 (483.4)	25
73151-SW	STANDARD EXTENSION RING, CONCENTRIC KO'S	WELDED	(2) 1/2" & (10) 1/2" - 3/4"	29.5 (483.4)	25

4-11/16" SQUARE EXTENSION RINGS

2-1/8" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS



73171-1/2

UL LISTED

FEATURES

- Combination knockouts allow for greater wiring flexibility
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4-11/16" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed



73171-3/4



73171-S



73171-1




73171-3/4W



73171-1W



73171-SW



73171-BLNK



73171-1-1/4W



73171-BLNKW



73171-SUB

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT		
73171-1/2	STANDARD EXTENSION RING	DRAWN	(12) 1/2"	43.0 (704.6)	25
73171-3/4	STANDARD EXTENSION RING	DRAWN	(12) 3/4"	43.0 (704.6)	25
73171-S	STANDARD EXTENSION RING, CONCENTRIC KO'S	DRAWN	(2) 1/2" & (10) 1/2" - 3/4"	43.0 (704.6)	25
73171-1	STANDARD EXTENSION RING	DRAWN	(8) 1"	43.0 (704.6)	25
73171-3/4W	STANDARD EXTENSION RING	WELDED	(12) 3/4"	43.0 (704.6)	25
73171-SW	STANDARD EXTENSION RING, CONCENTRIC KO'S	WELDED	(2) 1/2" & (10) 1/2" - 3/4"	43.0 (704.6)	25
73171-1W	STANDARD EXTENSION RING	WELDED	(8) 1"	43.0 (704.6)	25
73171-1-1/4W	STANDARD EXTENSION RING	WELDED	(8) 1-1/4"	43.0 (704.6)	25
73171-SUB	3" x 2" SWITCH BOX TO 4-11/16" SQ. CONVERSION RING	WELDED	2) 1/2" & (10) 1/2" - 3/4"	43.0 (704.6)	50
73171-BLNK	BLANK, NO KO'S	DRAWN	---	43.0 (704.6)	25
73171-BLNKW	BLANK, NO KO'S	WELDED	---	43.0 (704.6)	25

4-11/16" SQUARE EXTENSION RINGS

3" DEEP - WELDED WITH CONDUIT KNOCKOUTS



73181-BLNK



73181-SW

LISTED

FEATURES

- Combination knockouts allow for greater wiring flexibility

APPLICATIONS

- 4-11/16" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT		
73181-BLNK	BLANK, NO KO'S	WELDED	---	60.0 (983.3)	25
73181-SW*	STANDARD EXTENSION RING	WELDED	(6) 1/2", (6) 1/2" - 3/4"	60.0 (983.3)	25

*Not UL Listed

4-11/16" SQUARE FLAT COVERS



72C1



72C6

LISTED

c LISTED us

FEATURES

- Keyhole mounting holes for easy installation
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4-11/16" square blank flat covers are used to enclose a 4-11/16" square box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
72C1	BLANK	50
72C6	1/2" KO IN CENTER	50

4-11/16" SQUARE SINGLE DEVICE RINGS



72C62A



72C14-5/8



72C23

FEATURES
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS
- 4-11/16" square single device rings are used with 4-11/16" square boxes to mount switches, receptacles and devices

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

UL LISTED c UL US LISTED

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
72C62A	FOR DRYWALL FINISH	FLAT	---	50
72C62		1/4"	1.5 (24.6)	50
72C13		1/2"	3.5 (57.3)	50
72C14-5/8		5/8"	4.5 (73.7)	50
72C14		3/4"	5.5 (90.1)	25
72C15		1"	7.5 (122.9)	25
72C16		1-1/4"	9.5 (155.6)	25
72C22		1-1/2"	11.0 (180.2)	25
72C23		2"	16.0 (126.1)	25

4-11/16" SQUARE SINGLE DEVICE RINGS
ADJUSTABLE



AMR111B



AMR011B

FEATURES
- Adjustable device rings allow a perfect flush installation to finished surfaces, ensuring that devices are securely fastened and well grounded to rings
- Telescoping one gang inner ring adjusts to finished wall surface for a perfect fit every time
- Great for prefabricated assemblies

APPLICATIONS
- 4-11/16" square adjustable single device rings are used with 4-11/16" square boxes to mount switches, receptacles and devices
- Adjustable device rings are used in ceilings, walls and floors when finished surface depth is unknown

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	DEPTH ADJUSTMENT	MASTER QTY.
AMR111B	4-11/16" SQUARE, SINGLE DEVICE ADJUSTABLE	3/4" TO 1-1/2"	25
AMR011B	4-11/16" SQ. TO 4" ROUND, 2-3/4" ON CENTER FIXTURE EARS ADJUSTABLE	3/4" TO 1-1/2"	25

4-11/16" SQUARE DOUBLE GANG DEVICE RINGS



72C20A

LISTED LISTED

FEATURES

- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS

- 4-11/16" square two device rings are used with 4-11/16" square boxes to mount switches, receptacles and devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed



72C20



72C17



72C18-5/8



72C18



72C19



72C21



72C24




72C25

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
72C20A	FOR DRYWALL FINISH	FLAT	---	50
72C20		1/4"	3.0 (49.2)	50
72C17		1/2"	5.5 (90.3)	25
72C18-5/8		5/8"	7.3 (119.6)	25
72C18		3/4"	8.8 (144.2)	25
72C19		1"	12.0 (196.6)	25
72C21		1-1/4"	15.0 (245.8)	25
72C24		1-1/2"	15.5 (254.0)	25
72C25		2"	20.5 (335.9)	25

4-11/16" SQUARE DOUBLE GANG DEVICE RINGS

ADJUSTABLE



AMR211B

FEATURES

- Adjustable device rings allow a perfect flush installation to finished surfaces, ensuring that devices are securely fastened and well grounded to rings
- Telescoping two gang inner ring adjusts to finished wall surface for a perfect fit every time
- Great for prefabricated assemblies

APPLICATIONS

- 4-11/16" square adjustable two device rings are used with 4-11/16" square boxes to mount switches, receptacles and devices
- Adjustable device rings are used in ceilings, walls and floors when finished surface depth is unknown

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	DEPTH ADJUSTMENT	MASTER QTY.
AMR211B	4-11/16" SQUARE, TWO DEVICE ADJUSTABLE	3/4" TO 1-1/2"	10

4-11/16" SQUARE DEVICE RING PARTITIONS



LVP51



LV52

FEATURES

- Score lines guide for proper fit with device ring
- To prevent breaking off too many scored tabs it is recommended that the partition is in place in the box before the scored tab is broken off

APPLICATIONS

- Device partitions are used when low voltage and power devices are installed next to each other in one 4-11/16" square box
- Partitions separate line voltage and low voltage into their own compartments, preventing any harmful interference that power devices can induce in low voltage devices that are installed next to them

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	FOR RAISED DEVICE RINGS	MASTER QTY.
LVP51	FOR BOX DEPTH 2-1/8"	FLAT, 1/4", 1/2", 3/4", 1"	25
LVP52		5/8", 1-1/4", 1-1/2", 2"	25

4-11/16" SQUARE TO OCTAGON FIXTURE RING



72C4-5/8

FEATURES
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members
- Not rated for ceiling fan support, static fixture load only

APPLICATIONS
- 4-11/16" square to octagon raised device rings are used to mount light fixtures in walls and ceilings
- Rings convert a 4-11/16" square box to a 4" octagon opening with 8-32 threaded mounting tabs for lighting retrofit applications
- Octagon design allows additional space for LED drivers that do not fit in traditional square to round rings

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	RAISED	O.C. FIXTURE EAR	CUBIC INCHES (CM^3)	MASTER QTY.
72C4-5/8	4-11/16" SQUARE TO 4" OCTAGON	5/8"	3-1/2"	6.5 (106.6)	25

ADJUSTABLE



AMR-72C4

FEATURES
- Telescoping inner ring adjusts to finished wall surface for a perfect fit
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members
- Fixture Ears 3-1/2" O.C.
- Not rated for ceiling fan support, static fixture load only

APPLICATIONS
- 4-11/16" square to octagon rings are used to mount light fixtures in walls and ceilings
- Rings convert a 4-11/16" box to a 4" octagon opening with 8-32 threaded mounting tabs for lighting applications
- Octagon design allows additional space for LED drivers that do not fit in traditional square to round rings

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	CUBIC INCHES (CM^3)	MASTER QTY.
AMR-72C4	4-11/16" SQUARE TO OCTAGON	5/8 TO 1-1/4	10

4-11/16" SQUARE TO ROUND FIXTURE RINGS



72C3-F



72C3



72C3-5/8



72C3-3/4



72C3-1



72C3-1-1/4



72C3-1-1/2



72C3-2

FEATURES

- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members
- Not rated for ceiling fan support, static fixture load only
- Fixture Ears 2-3/4" on center

APPLICATIONS

- 4-11/16" square to round raised device rings are used to mount light fixtures in walls and ceilings
- Rings convert a 4-11/16" square box to a 3-1/2" round opening with 8-32 threaded mounting tabs for lighting retrofit applications

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed

PART #	DESCRIPTION	RAISED	O.C. FIXTURE EAR	CUBIC INCHES (CM^3)	MASTER QTY.
72C3-F	4-11/16" SQUARE TO 3-1/2" ROUND	FLAT	2-3/4"	---	25
72C3		1/2"	2-3/4"	3.5 (57.4)	25
72C3-5/8		5/8"	2-3/4"	4.8 (78.7)	25
72C3-3/4		3/4"	2-3/4"	5.4 (88.5)	25
72C3-1		1"	2-3/4"	6.5 (106.6)	25
72C3-1-1/4		1-1/4"	2-3/4"	9.5 (155.7)	25
72C3-1-1/2		1-1/2"	2-3/4"	10.0 (163.9)	25
72C3-2		2"	2-3/4"	12.9 (211.39)	25

4-11/16" SQUARE EXPOSED WORK RAISED 1/2" COVERS



72C29

LISTED LISTED

FEATURES
- Device mounting hardware included

APPLICATIONS
- 4-11/16" square, 1/2 in raised exposed work covers are used to close a 4-11/16" square junction box or to attach a device(s) in a surface mount industrial setting

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed



72C38



72C39



72C35



72C36



72C47



72C49



72C48



72C41



72C51



72C32



72C42



72C44



72C45



72C50



72C37



72C40


PART #	DEVICE OPENING(S)	CUBIC INCHES (CM^3)	MASTER QTY.
72C29	BLANK	10.3 (168.7)	25
72C38	(1) DUPLEX	10.3 (168.7)	25
72C39	(2) DUPLEX	10.3 (168.7)	25
72C35	(1) TOGGLE	10.3 (168.7)	25
72C36	(2) TOGGLES	10.3 (168.7)	25
72C47	(1) DECORATOR/GFCI	10.3 (168.7)	25
72C49	(2) DECORATOR/GFCI	10.3 (168.7)	25
72C48	(1) TOGGLE & (1) DECORATOR/GFCI	10.3 (168.7)	25
72C41	(1) TOGGLE & (1) DUPLEX	10.3 (168.7)	25
72C51	(1) DUPLEX & (1) DECORATOR/GFCI	10.3 (168.7)	25
72C32	(1) 1.406" DIAMETER	10.3 (168.7)	25
72C42	(1) 1.594" DIAMETER	10.3 (168.7)	25
72C44	(1) 30-50A 2.141" DIAMETER	10.3 (168.7)	25
72C45	(1) HUBBELL CS-6369, 50A TWIST LOCK	10.3 (168.7)	25
72C50	(1) 50A 2.141" DIAMETER	10.3 (168.7)	25
72C37	(2) 1.406" DIAMETER	10.3 (168.7)	25
72C40	(2) 1.620" DIAMETER	10.3 (168.7)	25
72C52	1.719 DIAMETER	10.3(168.7)	25

4-11/16" SQUARE SWIVEL FIXTURE HANGERS

20° MAX SWING FROM VERTICAL



SC-507511BHF



SC-507511B

UL LISTED c UL us LISTED

FEATURES

- Keyhole slots allow for fast installation
- SC-507511BHF features hinged door design that allows the installer to mount the cover on box and hang fixtures in one easy step
- Wire termination can be completed with the door open reducing time and labor expenses
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4-11/16" square swivel fixture hangers are used to hang industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/ electronic devices from overhead ceiling installations
- Perfect for industrial applications where the pipe stem or fixture might be subjected to motion or vibration

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed

PART #	DESCRIPTION	CONDUIT SIZE	MASTER QTY.
SC-507511BHF	HANDS-FREE WIRING OF FIXTURE	1/2" OR 3/4"	10
SC-507511B	STANDARD TYPE	1/2" OR 3/4"	10

4-11/16" SQUARE TO 4" SQUARE COVER ADAPTERS



72CP



72C4S-3/4

UL LISTED c UL us LISTED

FEATURES

- 8-32 mounting tabs
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS

- 4-11/16" to 4" square adapter covers convert 4-11/16" square boxes so they will accept 4" square covers
- Raised rings allow for additional wire capacity

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- Only 72CP UL, cULus Listed

PART #	DESCRIPTION	ACTUAL RAISED DIMENSION	MASTER QTY.
72CP	ADAPTS 4-11/16" SQ. BOX TO ACCEPT ALL 4" SQ. DEVICE RINGS OR COVERS	FLAT	50
72C4S-1/2		.56"	25
72C4S-3/4		.81"	25
72CP-SS	4-11/16" TO 4" ADAPTER PLATE, 316 STAINLESS STEEL	FLAT	25

5" SQUARE BOXES

2-7/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



5SQBLNK



5SQ5075



5SQ50100



5SQ5075100



5SQ100125



5SQ50750W

FEATURES

- Combination knockouts allow for greater wiring flexibility

APPLICATIONS

- 5" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions
- Large cu. in. capacity provides additional space for conductors or devices
- Perfect solution for sensitive bend radius data cable

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS


- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
5SQBLNK*	BLANK, FLAT BOTTOM	67.0 (1097.9)	---	67.0 (1097.9)	10
5SQ5075	FLAT BOTTOM, CONCENTRIC KO'S	67.0 (1097.9)	(12) 1/2" – 3/4"	67.0 (1097.9)	10
5SQ50100	FLAT BOTTOM	67.0 (1097.9)	(4) 1/2" & (8) 1"	67.0 (1097.9)	10
5SQ5075100	FLAT BOTTOM, CONCENTRIC KO'S	67.0 (1097.9)	(4) 1/2" – 3/4", (4) 1/2", (4) 1"	67.0 (1097.9)	10
5SQ100125	FLAT BOTTOM	67.0 (1097.9)	(4) 1" & (4) 1–1/4"	67.0 (1097.9)	10
5SQ50750W	OLD WORK WITH EARS & CLIPS	67.0 (1097.9)	(2) 1/2"& 10 1/2" – 3/4"	67.0 (1097.9)	10

*Not UL Listed

5" SQUARE EXTENSION RING

2-7/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



5XT5075

FEATURES

- Combination knockouts allow for greater wiring flexibility

APPLICATIONS

- 5" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT		
5XT5075	STANDARD EXTENSION RING, CONCENTRIC KO'S	(12) 1/2" - 3/4"	67.0 (1097.9)	10

5" SQUARE FLAT COVERS



5BC

LISTED LISTED

FEATURES
- Mounting slots for easy installation

APPLICATIONS
- 5" square blank flat covers are used to en close a 5" square box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
5BC	BLANK	25

5" SQUARE TO 4" SQUARE COVER ADAPTERS



5CP

LISTED LISTED

FEATURES
- 8-32 mounting tabs
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS
- 5" to 4" square adapter covers convert 5" square boxes so they will accept 4" square covers

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	ACTUAL 4" RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
5CP	ADAPTS 5" SQ. BOX TO ACCEPT ALL 4" SQ. DEVICE RINGS OR COVERS	FLAT	---	25

5" SQUARE SINGLE DEVICE RINGS



5158

FEATURES
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS
- 5" square single device rings are used with 5" square boxes to mount switches, receptacles and devices

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- Uses UL, cULus Listed components

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
5158	FOR DRYWALL FINISH	5/8"	4.5 (73.7)	25
5175		3/4"	5.5 (90.1)	25
51100		1"	7.5 (122.9)	25
51125		1-1/4"	8.5 (139.3)	25
51150		1-1/2"	11.3 (185.2)	25

ADJUSTABLE



51AMR-158


FEATURES
- Adjustable device rings allow a perfect flush installation to finished surfaces, ensuring that devices are securely fastened and well grounded to rings
- Telescoping one gang inner ring adjusts to finished wall surface for a perfect fit every time
- Great for prefabricated assemblies

APPLICATIONS
- 5" square adjustable single device rings are used with 5" square boxes to mount switches, receptacles and devices
- Adjustable device rings are used in ceilings, walls and floors when finished surface depth is unknown

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	DEPTH ADJUSTMENT	MASTER QTY.
51AMR-158	5" SQUARE, SINGLE DEVICE ADJUSTABLE	5/8" TO 1-1/4"	25
51AMR-1		3/4" TO 1-1/2"	25

5" SQUARE DOUBLE GANG DEVICE RINGS



5258

FEATURES
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS
- 5" square single device rings are used with 5" square boxes to mount switches, receptacles and devices

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
5258	FOR DRYWALL FINISH	5/8"	7.3 (119.6)	50
5275		3/4"	8.8 (144.2)	50
52100		1"	12.0 (196.6)	25
52125		1-1/4"	15.0 (245.8)	25
52150		1-1/2"	15.5 (253.9)	25
52200		2"	20.5 (335.9)	25

ADJUSTABLE



52AMR-2

FEATURES
- Adjustable device rings allow a perfect flush installation to finished surfaces, ensuring that devices are securely fastened and well grounded to rings
- Telescoping one gang inner ring adjusts to finished wall surface for a perfect fit every time
- Great for prefabricated assemblies

APPLICATIONS
- 5" square adjustable single device rings are used with 5" square boxes to mount switches, receptacles and devices
- Adjustable device rings are used in ceilings, walls and floors when finished surface depth is unknown

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	DEPTH ADJUSTMENT	MASTER QTY.
52AMR-2	5" SQUARE, TWO DEVICE ADJUSTABLE	3/4" TO 1-1/2"	25

5" SQUARE BOXES

3" DEEP, WITH HINGED PLATE ASSEMBLIES



5PF5075

LISTED

FEATURES

- 5" square hinged assemblies allows easy wiring access to large capacity box
- 5PF5075 assembly allows any 4" square device cover to mounted to a 5" square box

APPLICATIONS

- 5" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions
- Large cu. in. capacity provides additional space for conductors or devices
- Perfect solution for sensitive bend radius data cable
- Unbracketed assemblies are used in surface mount applications

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
5PF5075	5" SQ. BOX WITH 4" SQ. HINGED DEVICE RING MOUNTING PLATE	(12) 1/2" – 3/4"	(2) 3/4" & (3) 1/2"	67.0 (1097.9)	10

5" SQUARE BOXES

3" DEEP WITH BRACKETS AND HINGED PLATE ASSEMBLIES



5PF5075AB

FEATURES

- 5" square hinged assemblies allows easy wiring access to large capacity box
- 5PF5075AB assembly allows any 4" square device cover to mounted to a 5" square box
- AB style bracket allows box to be positioned on either side of metal or wood stud

APPLICATIONS

- 5" square boxes are used to distribute power to a number of electrical devices where multiple conductor runs are split into two or more directions
- Large cu. in. capacity provides additional space for conductors or devices
- Perfect solution for sensitive bend radius data cable

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- From UL Listed components

PART #	DESCRIPTION	BRACKET TYPE	BUILT-IN STANDOFF SUPPORT	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
5PF5075AB	HINGED DEVICE RING MOUNTING PLATE WITH RAISED SINGLE DEVICE RING	AB	3-1/2"	(12) 1/2" – 3/4"	(2) 3/4" & (3) 1/2"	67.0 (1097.9)	4

6" SQUARE BOXES

1-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



6150-BLNK



6150-S

LISTED

FEATURES

- Combination knockouts allow for greater wiring flexibility
- Large design ensures there are no sharp bends that may damage the cables inner conductors ensuring the inner conductor remains intact and capable of fast signal transmission (reference cable manufacturers to comply with the minimum bend radius of cable manufactures)

APPLICATIONS

- 6" square junction boxes provide extra wire capacity allowing electric and data wires and cables to be properly routed and housed
- The large cubic capcity supports CAT 5E, CAT 6, augmented CAT 6, CAT 7, augmented CAT 7, and fiber optic cables

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
6150-BLNK*	BLANK, FLAT BOTTOM	---	---	50.0 (819.4)	10
6150-S	CONCENTRIC KO'S, RAISED GROUND	(6) 1/2" & (6) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	50.0 (819.4)	10
6150-3/4	RAISED GROUND	(12) 3/4"	(2) 1/2" & (2) 3/4"	50.0 (819.4)	10

*Not UL Listed

6" SQUARE BOXES

2-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



6250-BLNK



6250-S



6250-3/4



6250-1



6250-1-1/4

FEATURES

- Combination knockouts allow for greater wiring flexibility
- Large design ensures there are no sharp bends that may damage the cables inner conductors ensuring the inner conductor remains intact and capable of fast signal transmission (reference cable manufacturers to comply with the minimum bend radius of cable)

APPLICATIONS

- 6" square junction boxes provide extra wire capacity allowing electric and data wires and cables to be properly routed and housed
- The large cubic capacity supports CAT 5E, CAT 6, augmented CAT 6, CAT 7, augmented CAT 7, and fiber optic cables

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
6250-BLNK*	BLANK, FLAT BOTTOM	---	---	84.0 (1376.6)	10
6250-S	CONCENTRIC KO'S, FLAT BOTTOM	(6) 1/2" & (6) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	84.0 (1376.6)	10
6250-3/4	RAISED GROUND	(12) 3/4"	(2) 1/2" & (2) 3/4"	84.0 (1376.6)	10
6250-1	RAISED GROUND	(12) 1"	(2) 1/2" & (2) 3/4"	84.0 (1376.6)	10
6250-1-1/4	RAISED GROUND	(8) 1-1/4"	(2) 1/2" & (2) 3/4"	84.0 (1376.6)	10

*Not UL Listed

6" SQUARE BOXES

3-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



6350-BLNK



6350-S



6350-3/4



6350-1



6350-1-1/4



6350-1-1/2

FEATURES

- Combination knockouts allow for greater wiring flexibility
- Large design ensures there are no sharp bends that may damage the cables inner conductors ensuring the inner conductor remains intact and capable of fast signal transmission (reference cable manufacturers to comply with the minimum bend radius of cable)

APPLICATIONS

- 6" square junction boxes provide extra wire capacity allowing electric and data wires and cables to be properly routed and housed
- The large cubic capcity supports CAT 5E, CAT 6, augmented CAT 6, CAT 7, augmented CAT 7, and fiber optic cables

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
6350-BLNK*	BLANK, FLAT BOTTOM	---	---	118.0 (1933.4)	10
6350-S	CONCENTRIC KO'S, RAISED GROUND	(6) 1/2", (6) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	118.0 (1933.4)	10
6350-3/4	RAISED GROUND	(12) 3/4"	(2) 1/2" & (2) 3/4"	118.0 (1933.4)	10
6350-1	RAISED GROUND	(12) 1"	(2) 1/2" & (2) 3/4"	118.0 (1933.4)	10
6350-1-1/4	RAISED GROUND	(8) 1-1/4"	(2) 1/2" & (2) 3/4"	118.0 (1933.4)	10
6350-1-1/2	RAISED GROUND	(8) 1-1/2"	(2) 1/2" & (2) 3/4"	118.0 (1933.4)	10

*Not UL Listed

6" SQUARE EXTENSION RINGS

1-1/2", 2-1/2", 3-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



6150-EXT



6350-EXT

UL LISTED

FEATURES
- Combination knockouts allow for greater wiring flexibility

APPLICATIONS
- 6" square extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	RING DEPTH	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM3)	MASTER QTY.
6150-EXT*	STANDARD EXTENSION RING, CONCENTRIC KO'S	1-1/2"	(6) 1/2" & (6) 1/2" – 3/4"	50.0 (819.4)	10
6350-EXT	STANDARD EXTENSION RING, CONCENTRIC KO'S	3-1/2"	(6) 1/2"& (6) 1/2" – 3/4"	118.0 (1933.4)	10

*Not UL Listed

6" SQUARE FLAT COVERS



6BC

UL LISTED c UL us LISTED

FEATURES
- Slotted mounting holes for easy installation

APPLICATIONS
- 6" square blank flat covers are used to enclose a 6" square box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
6BC	BLANK	25

6" SQUARE TO 4" SQUARE COVER ADAPTERS



6CP

LISTED cULus LISTED

FEATURES
- 8-32 mounting tabs
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS
- 6" to 4" square adapter covers convert 6" square boxes so they will accept 4" square covers

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	ACTUAL 4" RAISED DIMENSION	CUBIC INCHES (CM^3)	MASTER QTY.
6CP	ADAPTS 6" SQ. BOX TO ACCEPT ALL 4" SQ. DEVICE RINGS OR COVERS	FLAT	---	25

6" SQUARE SINGLE DEVICE RINGS



61-1/2

LISTED cULus LISTED

FEATURES
- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS
- 6" square single device rings are used with 6" square boxes to mount switches, receptacles and devices


STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
61-1/2	FOR DRYWALL	1/2"	4.0 (65.6)	25
61-5/8	FOR DRYWALL	5/8"	5.0 (81.9)	25
61-3/4	FOR DRYWALL	3/4"	6.0 (98.4)	25
61-1	FOR DRYWALL	1"	8.0 (131.1)	25
61-1-1/4	FOR DRYWALL	1-1/4"	10.0 (163.9)	25
61-1-1/2	FOR DRYWALL	1-1/2"	12.0 (196.7)	25
61-2	FOR DRYWALL	2"	16.0 (126.1)	25

6" SQUARE SINGLE DEVICE RINGS

ADJUSTABLE



61AMR-158

FEATURES

- Adjustable device rings allow a perfect flush installation to finished surfaces, ensuring that devices are securely fastened and well grounded to rings
- Telescoping one gang inner ring adjusts to finished wall surface for a perfect fit every time
- Great for prefabricated assemblies

APPLICATIONS

- 6" square adjustable single device rings are used with 6" square boxes to mount switches, receptacles and devices
- Adjustable device rings are used in ceilings, walls and floors when finished surface depth is unknown

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	DEPTH ADJUSTMENT	MASTER QTY.
61AMR-158	6" SQUARE, SINGLE DEVICE	DEPTH 5/8" TO 1-1/4"	10
61AMR-1	6" SQUARE, SINGLE DEVICE	DEPTH 3/4" TO 1-1/2"	10

6" SQUARE TWO GANG DEVICE RINGS



62-1/2

UL LISTED c UL us LISTED

FEATURES

- Angled slots on the covers compensate for up to 12° of box misalignment on upright framing members

APPLICATIONS

- 6" square two device rings are used with 6" square boxes to mount switches, receptacles and devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed



62-5/8



62-3/4



62-1



62-1-1/4



62-1-1/2



62-2

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
62-1/2	FOR DRYWALL	1/2"	6.0 (98.4)	25
62-5/8	FOR DRYWALL	5/8"	7.3 (119.7)	25
62-3/4	FOR DRYWALL	3/4"	8.8 (144.3)	25
62-1	FOR DRYWALL	1"	11.7 (191.8)	25
62-1-1/4	FOR DRYWALL	1-1/4"	15.0 (245.9)	25
62-1-1/2	FOR DRYWALL	1-1/2"	15.5 (253.9)	25
62-2	FOR DRYWALL	2"	20.5 (335.9)	25

6" SQUARE TWO GANG AND THREE GANG DEVICE RINGS

ADJUSTABLE



62AMR-2



63AMR-3

PART #	DESCRIPTION	DEPTH ADJUSTMENT	MASTER QTY.
62AMR-2	2 DEVICE, ADJUSTABLE RING	3/4" TO 1-1/2"	10
63AMR-3	3 DEVICE, ADJUSTABLE RING	3/4" TO 1-1/2"	10

FEATURES

- Adjustable device rings allow a perfect flush installation to finished surfaces, ensuring that devices are securely fastened and well grounded to rings
- Telescoping two and three gang inner ring adjusts to finished wall surface for a perfect fit every time
- Great for prefabricated assemblies

APPLICATIONS

- 6" square adjustable two and three device rings are used with 6" square boxes to mount switches, receptacles and devices
- Adjustable device rings are used in ceilings, walls and floors when finished surface

STANDARD MATERIAL

- Galvanized steel

LOW VOLTAGE RINGS FOR HOLLOW DRYWALL

OLD WORK



WBF-1



WBF-2



WBF-4

PART #	DESCRIPTION	FOR DRYWALL THICKNESS	MASTER QTY.
WBF-1	SINGLE DEVICE	3/8" TO 1-1/2"	100
WBF-2	TWO DEVICES	3/8" TO 1-1/2"	50
WBF-4	4" SQUARE	3/8" TO 1-1/2"	50

FEATURES

- For 3/8" through 1-1/2" drywall
- Unique design allows brackets to be mounted vertically or horizontally
- Includes mounting screws

APPLICATIONS

- Old-work device mounting rings are used to add a low voltage device in drywall, tile or plaster wall opening

STANDARD MATERIAL

- Galvanized steel

STUD-MOUNT LOW VOLTAGE RINGS

FOR HOLLOW DRYWALL, NEW CONSTRUCTION, STANDARD DUTY



SLR-1-EV



SLR-2-EV

FEATURES

- For 3/8" thru 1-1/2" drywall
- Unique design allows brackets to be mounted vertically or horizontally against wood or steel stud
- Side-stud tab adds rigidity to bracket
- .035" thick galvanized steel

APPLICATIONS

- New construction, stud mounted device rings are used to add a low voltage device in drywall

STANDARD MATERIAL

- Galvanized steel


PART #	DESCRIPTION	NUMBER OF DEVICES	FOR DRYWALL THICKNESS	MASTER QTY.
SLR-1-EV	VERTICAL OR HORIZONTAL MOUNT	SINGLE	1/2" OR 5/8"	50
SLR-2-EV	VERTICAL OR HORIZONTAL MOUNT	TWO	1/2" OR 5/8"	50

STUD-MOUNT LOW VOLTAGE RINGS

FOR HOLLOW DRYWALL, NEW CONSTRUCTION, HEAVY DUTY



SLR-150



SLR-250

FEATURES

- For 3/8" through 1-1/2" drywall
- Unique design allows brackets to be mounted vertically or horizontally against wood or steel stud
- Side-stud tab adds rigidity to bracket
- .0625" thick galvanized steel

APPLICATIONS


- New construction, stud mounted device rings are used to add a low voltage device or power (with addition of box) in drywall

STANDARD MATERIAL


- Galvanized steel

PART #	DESCRIPTION	NUMBER OF DEVICES	FOR DRYWALL THICKNESS	MASTER QTY.
SLR-150	VERT OR HORZ MOUNT, 4" SQUARE BOX MOUNT OPTION	SINGLE	1/2"	50
SLR-158		SINGLE	5/8"	25
SLR-250	VERT OR HORZ MOUNT, 4" SQUARE BOX MOUNT OPTION	TWO	1/2"	50
SLR-258		TWO	5/8"	25
SLR-275		TWO	3/4"	25

ROMEX® BRAND SMARTBOX™ LOW VOLTAGE BOX-PVC



MSBLV1G

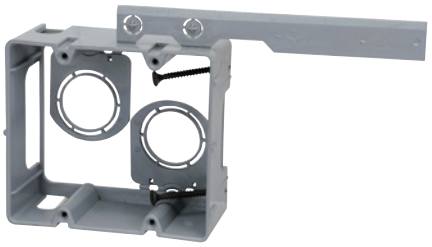

MSBLV2G

FEATURES
- Leveling tab for easy alignment to adjacent box
- Heavy 42 lbs. mounting screws included
- Horizontal or vertical mount
- #6-32 threaded device mounting holes

APPLICATIONS
- Use to run low voltage cable to where TV and computer locations are suited

STANDARD MATERIAL
- PVC

CERTIFICATIONS
- RoHS Compliant

RoHS


PART #	DESCRIPTION	CUBIC INCHES (CM^3)	MASTER QTY.
MSBLV1G	1 GANG	10.75 (176.16)	16
MSBLV2G	2 GANG	20.84 (341.51)	50

STUD-MOUNT LOW VOLTAGE RINGS

FOR HOLLOW DRYWALL, NEW CONSTRUCTION, ADJUSTABLE DEPTH



AMR-1-LV



AMR-2-LV

FEATURES
- Stud face mounting bracket can be quickly and easily screwed directly to wood or metal framing in new construction applications

APPLICATIONS
- Telescoping adjustable depth one gang low voltage device rings allow the installer to adjust the device to the perfect finished wall surface providing a secure connection point for low voltage jacks and other data connections

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	NUMBER OF DEVICES	FOR DRYWALL THICKNESS	MASTER QTY.
AMR-1-LV	VERT MOUNT	SINGLE	5/8" TO 1-1/4"	10
AMR-2-LV	VERT MOUNT	TWO	5/8" TO 1-1/4"	10

MEDIA WALL PLATES, SNORKEL OPENING

NONMETALLIC, WHITE



LVP1NP



LVP1SH



LVP2NP



LVP3NP

FEATURES

- Vertical or horizontal mounting styles available

APPLICATIONS

- One, two and three gang low-voltage plates are manufactured with an open-nose in cable splash to conceal multiple AV cables behind your flat panel TV or other media platform

STANDARD MATERIAL

- Plastic

PART #	DESCRIPTION	VERTICAL OR HORIZONTAL	NUMBER OF DEVICES	PLATE SIZE	MASTER QTY.
LVP1NP	SNORKEL PLATE WITH SCREWS	VERTICAL	SINGLE	4-5/8" x 2-3/4"	25
LVP1SH	SNORKEL PLATE WITH OLD WORK CLIPS (FOR 3/4" TO 1" DEPTH)	HORIZONTAL	SINGLE	4-7/8" x 3-1/4"	25
LVP2NP	SNORKEL PLATE WITH SCREWS	HORIZONTAL	TWO	4-1/2"x 4-1/2"	10
LVP3NP	SNORKEL PLATE WITH SCREWS	HORIZONTAL	THREE	4-1/2" x 6-3/8"	10

MEDIA WALL PLATES, GROMMET OPENING

WITH WINGS, NONMETALLIC, WHITE



LVP1

FEATURES

- Mounting wings are molded into cable plate and fasten tightly against the back of any drywall and require no additional parts or screws

APPLICATIONS

- One and two gang cable plates come with a flexible opening to allow low voltage cables through a wall while keeping the opening in the wall covered
- They are perfect for eliminating connections at the wall and can hold up to six cables

STANDARD MATERIAL

- Plastic

PART #	DESCRIPTION	VERTICAL OR HORIZONTAL	NUMBER OF DEVICES	PLATE SIZE	MASTER QTY.
LVP1	GROMMETED OPENING, WITH OLD WORK WINGS	VERTICAL	SINGLE	4-1/2" x 2-3/4"	25

MEDIA WALL PLATES, SNORKEL OPENING

WITH RECEPTACLE COMBO, NONMETALLIC WHITE



DPBOSDUP



DPBOSGF

FEATURES

- The oversized box includes a 15 Amp receptacle or GFCI that is recessed back in the box so power cords do not interfere with wall mounting the TV
- Use the snap in clips to secure the box to the opening
- Finished trim on the box makes for a clean wall install

APPLICATIONS


- Oversized cut-in recessed media boxes are used on existing hollow walls when you need both GFCI protected power and low voltage cables pulled to one location
- Various low voltage cables to be pulled for any media play

STANDARD MATERIAL

- Plastic

PART #	DESCRIPTION	CONFIGURATION	PLATE SIZE	MASTER QTY.
DPBOSDUP	SNORKEL OPENING WITH SCREWS & 2, 15 AMP RECEP'S	ANGLE & RECESSED	7-5/8" x 8-1/8"	20
DPBOSGFI	SNORKEL OPENING WTIH SCREWS & 2, 15 AMP GFCI RECEP'S	ANGLE & RECESSED	7-5/8" x 8-1/8"	20

2-GANG POWER/DATA WALL BOXES



DPB-2



DPB-20W



DPB-2F

FEATURES

- Steel box partition included
- Rubber grommets on sharp knockout edges insures low voltage wires will not get damaged

APPLICATIONS

- Two-device box for one power outlet and one low voltage device
- Perfect for power and low voltage combo box needed behind computers, flat screen televisions and other electronic appliances
- Includes plastic partition
- "OW" suffix for old work applications
- "F" suffix bracketed box for new construction

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
DPB-2	BOX NO BRACKET, STEEL PARTITION, KO GROMMETS ON DATA SIDE	(2) 1/2" – 3/4"	(6) 1/2" – 3/4"	31.8 (521.1)	25
DPB-20W	OLD WORK WITH EARS & CLIPS, KO GROMMETS ON DATA SIDE	(2) 1/2" – 3/4"	(6) 1/2" – 3/4"	31.8 (521.1)	25
DPB-2F	"F" BRACKET, STEEL PARTITION, KO GROMMETS ON DATA SIDE	(2) 1/2" – 3/4"	(6) 1/2" – 3/4"	31.8 (521.1)	25

3-1/2" ROUND PAN BOX

1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS
FIXTURE EARS 2-3/4" ON CENTER



46111



46111-R



46111-OW

FEATURES
- Use to add sconce lights, cameras, alarms, etc. to any wall

APPLICATIONS
- 3-1/2" round pans are used to mount ceiling, and wall lighting fixtures when a shallow depth box is required
- 46111-OW old work design allows light fixtures to be mounted in a wall or ceiling fixtures in applications in front of plumbing pipes, HVAC ducts or PVC pipe

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

UL LISTED

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
46111	FLAT BOTTOM	---	(3) 1/2" & (4) PRIOUTS	3.8 (62.3)	50
46111-R	KO AND NMSC CLAMPS	---	(1) 1/2" & (4) PRIOUTS	3.8 (62.3)	50
46111-OW	OLD WORK CLAMP/FLANGE AND PIGTAIL	---	(2) 1/2"	3.8 (62.3)	50

3-1/2" ROUND PAN BOX EXTENSION RING

1/2" DEEP, FIXTURE EARS 2-3/4" ON CENTER



47111

UL LISTED

FEATURES
- Slotted pan box mounting tabs for easy installation

APPLICATIONS
- Pan extension rings are used to mount ceiling and wall lighting fixtures and to provide additional wire capacity when needed on existing pan boxes
- Pan box extension rings prevent the need to replace old pan boxes and wiring from circuits when additional wiring is needed

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CUBIC INCHES (CM^3)	MASTER QTY.
47111	EXTENSION RING, EASY-ON DESIGN	3.8 (62.3)	10

4" ROUND PAN BOX

1/4" DEEP - DRAWN WITH CONDUIT KNOCKOUTS, EXTRA SHALLOW FIXTURE EARS 3-1/2" ON CENTER



56113

LISTED

FEATURES
- Combo head fixture mounting screws

APPLICATIONS
- 4" round super shallow, pan box is used to run power where old 1/4" or 3/8" drywall/ plaster overlay is installed
- Typically used in surface mount applications

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
56113	FLAT BOTTOM, DRYWALL OVERLAY EXISTING SURFACE	---	(5) 1/2"	3.8 (62.3)	50

4" ROUND PAN BOX


1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS FIXTURE EARS 3-1/2" ON CENTER



56111



56111-R



56111-OW

LISTED

FEATURES
- Use to add sconce lights, cameras, alarms, etc. to any wall

APPLICATIONS
- 4" round pans are used to mount ceiling, and wall lighting fixtures when a shallow depth box is required
- 56111-OW old work design allows light fixtures to be mounted in a wall or ceiling fixtures in applications in front of plumbing pipes, HVAC ducts or PVC pipe

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
56111	FLAT BOTTOM	---	(5) 1/2"	5.5 (90.2)	50
56111-R	KO'S AND NMSC CLAMPS	---	(3) 1/2", (4) NM	5.5 (90.2)	50
56111-OW	OLD WORK CLAMP/FLANGE AND PIGTAIL	---	(2) 1/2"	5.5 (90.2)	50

4" ROUND PAN BOX EXTENSION RING

1/2" DEEP, FIXTURE EARS 3-1/2" ON CENTER



57111

FEATURES
- Slotted pan box mounting tabs for easy installation

APPLICATIONS
- Pan extension rings are used to mount ceiling and wall lighting fixtures and to provide additional wire capacity when needed on existing pan boxes
- Pan box extension rings prevent the need to replace old pan boxes and wiring from circuits when additional wiring is needed

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CUBIC INCHES (CM^3)	MASTER QTY.
57111	EXTENSION RING EASY-ON DESIGN	6.0 (98.3)	50

4" ROUND PAN BOX

FLAT COVERS



54C1-R



54C6-R



54CBPO

LISTED LISTED

FEATURES
- Keyhole mounting holes for easy installation

APPLICATIONS
- 4" round flat covers are used to close off a 4" round pan as a junction box, add a wiring device, or to mount a light fixture

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
54C1-R	BLANK, NO KO	50
54C6-R	1/2" CENTER KO	50
54CBPO	TOGGLE, OIL BURNER, RED	25

4" ROUND PAN BOX, FIXTURE RINGS

FIXTURE EARS 2-3/4" ON CENTER



54C3-F



54C3-5/8



54C3-2

FEATURES

- Keyhole mounting holes for easy installation
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" round raised fixture rings are used to mount a light fixture in a ceiling or on wall

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed

UL LISTED c UL US LISTED

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
54C3-F	FOR DRYWALL	FLAT	---	25
54C3		1/2"	3.0 (49.2)	25
54C3-5/8		5/8"	4.8 (78.7)	25
54C3-3/4		3/4"	5.8 (95.1)	25
54C3-1		1"	7.8 (127.9)	25
54C3-1-1/4		1-1/4"	9.5 (155.7)	25
54C3-1-1/2		1-1/2"	10.0 (163.9)	25
54C3-2		2"	13.5 (221.3)	25

4" ROUND PAN BOX, FIXTURE RINGS

ADJUSTABLE, FIXTURE EARS 2-3/4" ON CENTER



AMR-00

FEATURES

- Adjustable fixture ring allows a perfect flush installation to finished surfaces, ensuring that fixture is securely fastened and well grounded to rings
- Telescoping round inner ring adjusts to finished wall surface for a perfect fit every time

APPLICATIONS

- 4" round fixture ring is used with 4" round boxes to mount lighting fixtures
- Adjustable fixture ring is used in ceilings or walls when finished surface depth is unknown

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	DEPTH ADJUSTMENT	MASTER QTY.
AMR-00	4" ROUND, ADJUSTABLE RING	3/4" TO 1-1/2"	25

4" ROUND SWIVEL FIXTURE HANGERS

20° MAX SWING FROM VERTICAL



SC-5075HFR



SC-50R



SC-75R



33R

FEATURES

- Keyhole slots allow for fast installation
- SC-5075HFR features hinged door design that allows the installer to mount the cover on box and hang fixtures in one easy step
- Wire termination can be completed with the door open reducing time and labor expenses

APPLICATIONS

- 4" round swivel fixture hangers are used to hang commercial or industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/ electronic devices from overhead ceiling installations
- Perfect for commercial or industrial applications where the pipe stem or fixture might be subjected to motion or vibration

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL, cULus Listed

PART #	DESCRIPTION	FITS CONDUIT	MASTER QTY.
SC-5075HFR	HANDS-FREE WIRING OF FIXTURE	1/2" OR 3/4"	25
SC-50R	STANDARD TYPE	1/2" ONLY	25
SC-75R	STANDARD TYPE	3/4" ONLY	25
33R	STANDARD TYPE	1/2" OR 3/4"	25

3-1/2" OCTAGON BOXES

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS
EARS 2-3/4" ON CENTER



24151-1/2



24151-R

FEATURES

- Combo-head ficture/cover mounting screws

APPLICATIONS

- Octagon boxes are used to install ceiling and wall lighting fixtures or convenience outlets and devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
24151-1/2	FLAT BOTTOM	(4) 1/2"	(1) 1/2"	11.5 (188.5)	25
24151-R	NMSC CLAMPS	(2) 1/2" (4) NMSC	(1) 1/2"	11.5 (188.5)	50

3-1/2" OCTAGON FLAT COVERS



24C6

LISTED

c LISTED us

FEATURES
- Keyhole mounting holes for easy installation

APPLICATIONS
- 3-1/2" octagon flat covers are used to close off a 3-1/2" octagon box as a junctions box

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
24C6	1/2" CENTER KO	25

4" OCTAGON BOXES

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS FIXTURE EARS 3-1/2" ON CENTER



54151-1/2

LISTED

FEATURES
- Combo-head fixture/cover mounting screws

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed



54151-DE



54151-OW



54151-DEOW



54151-3/4



54151-S



54151-BLNK

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
54151-1/2	FLAT BOTTOM	(4) 1/2"	(5) 1/2"	14.0 (229.5)	50
54151-DE	FLAT BOTTOM, 2 ADDITIONAL FIXTURE EARS	(4) 1/2"	(5) 1/2"	14.0 (229.5)	50
54151-OW	OLD WORK WITH EARS & CLIPS	---	(3) 1/2", (2) 3/4"	14.0 (229.5)	50
54151-DEOW	OLD WORK WITH EARS & CLIPS, 2 ADDITIONAL FIXTURE EARS	(4) 1/2"	(3) 1/2", (2) 3/4"	14.0 (229.5)	50
54151-3/4	FLAT BOTTOM	(4) 3/4"	(3) 1/2", (2) 3/4"	14.0 (229.5)	50
54151-S	FLAT BOTTOM	(2) 1/2", (2) 3/4"	(3) 1/2", (2) 3/4"	14.0 (229.5)	50
54151-BLNK *	BLANK, NO KO'S	---	---	15.5 (254.0)	50
54151-SGS	RAISED GROUND WITH 10/32 GROUND SCREW	(2) 1/2", (2) 3/4"	(2) 1/2", (2) 3/4"	14.0(229.5)	50
54151-ES	RAISED GROUND	(4) 1/2"&3/4" CONC.	(2) 1/2", (2) 1/2"&3/4" CONC.	14.0(229.5)	50

*Not UL Listed

4" OCTAGON BOXES

1-1/2" DEEP - DRAWN WITH CLAMPS
FIXTURE EARS 3-1/2" ON CENTER



54151-R



54151-BX



54151-OWR



54151-OWBX

FEATURES
- Combo-head fixture/cover mounting screws

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices


STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed


PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
54151-R	NMSC CLAMPS	NMSC	(4) NM	(1) 1/2"	14.0 (229.5)	50
54151-OWR	NMSC CLAMPS, OLD WORK WITH EARS & CLIPS	NMSC	(6) 1/2", (4) NM	(1) 1/2"	14.0 (229.5)	25
54151-BX	MC/BX CLAMPS	MC/BX	(2) 1/2", (4) MC/BX	(1) 1/2"	14.0 (229.5)	25
54151-OWBX	MC/BX CLAMPS, OLD WORK WITH EARS & CLIPS	MC/BX	(4) MC/BX	(1) 1/2"	14.0 (229.5)	25

4" OCTAGON BRACKETED BOXES

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS
FIXTURE EARS 3-1/2" ON CENTER

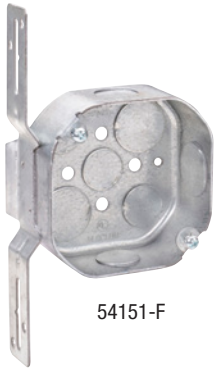

54151-F



54151-J

FEATURES
- Combo-head fixture/cover mounting screws

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices


STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
54151-F	FLAT, STUD SIDE MOUNT	F	(2) 1/2", (1) 3/4"	(3) 1/2", (2) 3/4"	14.0 (229.5)	25
54151-J	NAIL SPIKE BRACKET	J	(4) 1/2"	(5) 1/2"	14.0 (229.5)	25

4" OCTAGON BRACKETED BOXES


1-1/2" DEEP - DRAWN WITH CLAMPS
FIXTURE EARS 3-1/2" ON CENTER

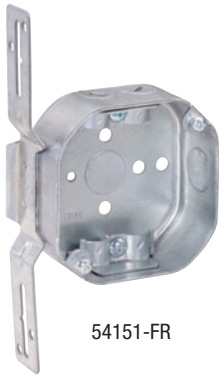


54151-FR



54151-FBX



54151-JR



54151-JBX

LISTED

FEATURES
- Combo-head fixture/cover mounting screws

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
54151-FR	FLAT, STUD SIDE MOUNT, NMSC CLAMPS	NMSC	F	(2) 1/2" & (4) NM	(1) 1/2"	14.0 (229.5)	25
54151-JR	NAIL SPIKE BRACKET	NMSC	J	(2) 1/2" & (4) NM	(1) 1/2"	14.0 (229.5)	25
54151-FBX	FLAT, STUD SIDE MOUNT, MC/BX CLAMPS	MC/BX	F	(2) 1/2" & (4) MC/BX	(1) 1/2"	14.0 (229.5)	25
54151-JBX	NAIL SPIKE BRACKET	MC/BX	J	(2) 1/2" & (4) MC/BX	(1) 1/2"	14.0 (229.5)	25

4" OCTAGON BOXES

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS, EARS 3-1/2" ON CENTER



54171-1/2

LISTED

FEATURES
- Combo-head fixture/cover mounting screws

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices. Special application product available in this cover style

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed



54171-DE



54171-OW



54171-DEOW



54171-3/4



54171-S



54171-BLNK



54171-1/2BB



54171-BLNKSS



54171-SVTSS

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
54171-1/2	FLAT BOTTOM	(4) 1/2"	(3) 1/2 & (2) 3/4"	20.0 (327.8)	25
54171-DE	FLAT BOTTOM, 2 ADDITIONAL FIXTURE EARS	(4) 1/2"	(3) 1/2" & (2) 3/4"	20.0 (327.8)	25
54171-OW	OLD WORK WITH EARS & CLIPS	(2) 1/2"	(3) 1/2" & (2) 3/4"	20.0 (327.8)	25
54171-DEOW	OLD WORK WITH EARS & CLIPS, 2 ADDITIONAL FIXTURE EARS	(2) 1/2"	(3) 1/2" & (2) 3/4"	20.0 (327.8)	25
54171-3/4	FLAT BOTTOM	(4) 3/4"	(3) 1/2" & (2) 3/4"	20.0 (327.8)	25
54171-S	CONCENTRIC KO'S, FLAT BOTTOM	(2) 1/2" & (2) 1/2" – 3/4"	(3) 1/2" & (2) 3/4"	20.0 (327.8)	25
54171-BLNK *	BLANK, NO KO'S	---	---	21.5 (352.3)	25
54171-1/2BB	BLANK BOTTOM	(4) 1/2"	---	21.5 (352.3)	25
54171-BLNKSS *	BLANK, 304 STAINLESS STEEL	---	---	21.5 (352.3)	25
54171-SVTSS	PLENUM, 304 STAINLESS STEEL	(2) 1/2" & (2) 3/4"	(3) 1/2" & (2) 3/4"	21.5 (352.3)	25

*Not UL Listed

4" OCTAGON BOXES

2-1/8" DEEP - DRAWN WITH CLAMPS, EARS 3-1/2" ON CENTER



54171-R



54171-BX



54171-OWBX

FEATURES
- Combo-head fixture/cover mounting screws

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices
- Special application product available in this cover style

STANDARD MATERIAL
- Galvanized steel


CERTIFICATIONS
- UL Listed

UL LISTED

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
54171-R	NMSC CLAMPS	NMSC	(2) 1/2" & (4) NM	(1) 1/2"	20.0 (327.8)	25
54171-BX	MC/BX CLAMPS	MC/BX	(2) 1/2" & (4) MC/BX	(1) 1/2"	20.0 (327.8)	25
54171-OWBX	MC/BX CLAMPS, OLD WORK WITH EARS & CLIPS	MC/BX	(4) MC/BX	(1) 1/2"	20.0 (327.8)	25

4" OCTAGON CEILING GRID/T-BAR BOXES

2-1/8" DEEP - DRAWN WITH CLAMPS, EARS 3-1/2" ON CENTER



54171-TBAR

FEATURES
- Multi-depth break-away side tabs allow box to fit snugly on any ceiling T-bar rail
- Tab on back of the box allows tie wires to be secure to ceiling structures
- Combo-head fixture mounting screws

APPLICATIONS
- 4" octagon boxes with side T-bar slots are used for low voltage applications such as security cameras and life safety systems in drop ceiling applications

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
54171-TBAR	T-BAR CEILING GRID, BACKSIDE EYELET FOR WIRE SUPPORT	(4) T-BAR SLOTS, NO KO'S	(2) 1/2"	20.0 (327.8)	25

4" OCTAGON BRACKETED BOXES

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS EARS 3-1/2" ON CENTER



54171-F

LISTED

FEATURES
- Combo-head fixture mounting screws


APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices

STANDARD MATERIAL
- Galvanized steel


CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
54171-F	FLAT, STUD SIDE MOUNT, 1/2" SET BACK	F	(3) 1/2"	(5) 1/2"	20.0 (327.8)	25

2-1/8" DEEP - DRAWN WITH CLAMPS, EARS 3-1/2" ON CENTER

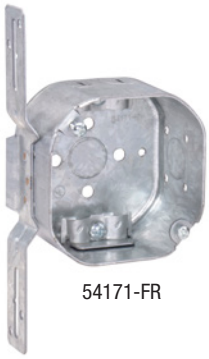

54171-FR




54171-JBR

LISTED



54171-FBX



54171-JBX

FEATURES
- Combo-head fixture mounting screws

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
54171-FR	FLAT, STUD SIDE MOUNT, 1/2" SET BACK, NMSC CLAMPS	NMSC	F	(1) 1/2" & (4) NM	(1) 1/2"	20.0 (327.8)	25
54171-JBR	NAIL SPIKE BRACKET	NMSC	J	(2) 1/2" & (4) NM	(1) 1/2"	20.0 (327.8)	25
54171-FBX	FLAT, STUD SIDE MOUNT, 1/2" SET BACK, MC/BX CLAMPS	MC/BX	F	(1) 1/2" & (4) MC/BX	(1) 1/2"	20.0 (327.8)	25
54171-JBX	NAIL SPIKE BRACKET	MC/BX	J	(2) 1/2" & 4) MC/BX	(1) 1/2"	20.0 (327.8)	25

4" OCTAGON OPEN SPLICE BOXES

2-1/8" DEEP - DRAWN WITH CLAMPS, EARS 3-1/2" ON CENTER



54171-OPR

FEATURES
- Open side slots allow cable to slide down into the box and be secured by included non–metallic cable clamps
- Attachable side panels and a blank box cover protect and complete the connection

APPLICATIONS
- 4" octagon open splice boxes are designed to secure and protect open splices in walls and ceilings
- Unique design allows the installer to insert the open splice wires and connections inside the octagon box and secure it in place without the need to disconnect the cables and compromise the power source
- Eliminates illegal open splices in field

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
54171-OPR	OPEN SPLICE BOX, REMOVABLE SIDE PANELS, WITH COVER	R	(4) NM	---	20.0 (327.8)	25

4" OCTAGON BOXES

3-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS EARS 3-1/2" ON CENTER



54181-BLNK



54181-S



54181-OW

FEATURES
- Combo-head fixture/cover mounting screws

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed


UL LISTED

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
54181-BLNK*	BLANK	---	---	37.0 (606.4)	25
54181-S	CONCENTRIC KO'S, FLAT BOTTOM	(4) 1/2" - 3/4"	(3) 1/2", (2) 3/4"	37.0 (606.4)	25
54181-OW	OLD WORK WITH EARS & CLIPS	(4) 1/2" - 3/4"	(3) 1/2", (2) 3/4"	37.0 (606.4)	25

*Not UL Listed

4" OCTAGON CEILING GRID/T-BAR BOXES

3-1/2" DEEP - DRAWN WITH CLAMPS, EARS 3-1/2" ON CENTER



54181-TBAR

FEATURES

- Multi-depth break-away side tabs allow box to fit snugly on any ceiling T-bar rail
- Tab on back of the box allows tie wires to be secure to ceiling structures
- Combo-head fixture mounting screws

APPLICATIONS

- 4" octagon boxes with side T-bar slots are used for low voltage applications such as security cameras and life safety systems in drop ceiling applications

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
54181-TBAR	T-BAR CEILING GRID, BACKSIDE EYELET FOR WIRE SUPPORT	(4) T-BAR SLOTS & (4) 1/2" – 3/4"	(2) 1/2"	37.0 (606.4)	25

4" OCTAGON EXTENSION RINGS

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS EARS 3-1/2" ON CENTER



55151-1/2



55151-S



55151-3/4

LISTED

FEATURES

- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS

- 4" octagon extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT		
55151-1/2	STANDARD EXTENSION RING	(4) 1/2"	14.0 (229.5)	25
55151-3/4		(4) 3/4"	14.0 (229.5)	50
55151-S		(2) 1/2" & (2) 3/4"	14.0 (229.5)	50

*Not UL Listed

4" OCTAGON EXTENSION RINGS

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS
EARS 3-1/2" ON CENTER



55171-S

LISTED

FEATURES
- Special application product available in this box/style depth. Reference Boxes and Covers Special Application section for details

APPLICATIONS
- 4" octagon extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
55171-S	STANDARD EXTENSION RING	(2) 1/2" & (2) 3/4"	20.0 (327.8)	25

*Not UL Listed

4" OCTAGON FLAT COVERS



54C1

LISTED

c LISTED us



54C40



54C6



54C41



54C42

FEATURES
- Keyhole mounting holes for easy installation

APPLICATIONS
- 4" octagon flat covers are used to close off a 4" octagon box as a junction box, add a wiring device, or to mount a light fixture
- Special application product available in this cover style

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
54C1	BLANK	50
54C6	1/2" CENTER KO	50
54C40	DUPLEX	50
54C41	1.4" DIAMETER	50
54C42	TOGGLE	50

4" OCTAGON STATIONARY FIXTURE HANGERS



54C50

LISTED LISTED

FEATURES
- Mounting slots allow for fast installation
- Threaded fixture stem affixed to cover

APPLICATIONS
- 4" octagon fixture covers are used to hang commercial or industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/ electronic devices from overhead ceiling installations
- Perfect for commercial or industrial applications where the pipe stem or fixture is not subjected to motion or vibration

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	CONDUIT SIZE	MASTER QTY.
54C50	WILL NOT SWING OR ROTATE	1/2"	25

4" OCTAGON TO 4" SQUARE ADAPTER



52C1-OCT

FEATURES
- 8-32 mounting tabs every time

APPLICATIONS
- 4" octagon to 4" square adapter allows 4" square covers to be mounted to traditional 4" octagon boxes or 4" round pan boxes
- Adapters are used as a conversion plate to provide 4" square mounting tabs for life safety and other low voltage devices

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	MASTER QTY.
52C1-OCT	CONVERTS 4" OCT OR ROUND TO 4" SQUARE	25

4" OCTAGON BOXES


1-1/2" DEEP - DRAWN, WITH CONDUIT OR CLAMPS, BAR HANGER ASSEMBLIES



54151-HU



54151-HUR

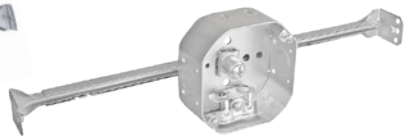

54151-HUBX

FEATURES

- Design allows boxes to be installed any where along the length of the bar
- Box pre-installed to bar for quick installation
- See Southwire BHC for replacement clip & screw
- Not designed or intented for ceiling fan support

APPLICATIONS

- Adjustable length box bar hangers allow electrical boxes to be quickly and easily installed between ceiling joists or wall studs
- Box included

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	MAX. RECOMMENDED STATIC FIXTURE SUPPORT (LBS.)	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
54151-HU	16" TO 24" ADJUSTABLE BAR WITH CONDUIT BOX	10	(4) 1/2"	(2) 1/2" & (2) 3/4"	15.5 (254.0)	25
54151-HUR	16" TO 24" ADJUSTABLE BAR, WITH NMSC CLAMPS BOX	10	(2) 1/2" & (4) NM	---	15.5 (254.0)	25
54151-HUBX	16" TO 24" ADJUSTABLE BAR, WITH MC/BX CLAMPS BOX	10	(2) 1/2" & (4) MC/BX	---	15.5 (254.0)	25

ADJUSTABLE BAR HANGERS

GALVANIZED STEEL



BHA1C



BHA1

FEATURES

- Box clip installs in 1/2" knockouts, located on the bottom of boxes
- Design allows boxes to be installed any where along the length of the bar
- See Southwire BHC for replacement clip & screw
- Not designed or intended for ceiling fan support
- UL rated for 50 lbs. on 16" centers

APPLICATIONS

- Adjustable length box bar hangers allow electrical boxes to be quickly and easily installed between ceiling joists or wall studs

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

LISTED

PART #	JOIST OR STUD SPAN	BOX MOUNTING	MAX. RECOMMENDED STATIC FIXTURE SUPPORT (LBS.)	MASTER QTY.
BHA1C	16" TO 24"	BOX-LOCKING CLIP	50	50
BHA1		BOX LOCK CLIP & THREADED STUD	50	50

BH SERIES BAR HANGERS

REPLACEMENT CLIP AND SCREW SET



BHC

FEATURES

- Includes clip and screw

APPLICATIONS

- Use to affix box to Southwire bar hangers BH Series

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	MASTER QTY.
BHC	CLIP AND SCREW	50

3-1/2" ROUND PAN BOX

3/4" DEEP, - DRAWN, FIXTURE EARS 2-3/4" ON CENTER FOR CEILING FAN & FIXTURE SUPPORT



46112

LISTED

FEATURES
- Mounting hardware included

APPLICATIONS
- Ceiling fan rated pan boxes are used to mount ceiling fans and heavy light fixtures when a shallow depth box is required

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	RECOMMENDED MAX LOAD RATINGS		KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.	SIDE CONDUIT	BOTTOM CONDUIT		
46112	CEILING FAN/LIGHT FIXTURE SUPPORT	70	150	---	(2) 1/2"	6.0 (98.4)	25

4" ROUND CEILING FAN BOXES

1/2" DEEP CEILING FAN BOXES



56112-CF

LISTED

c LISTED us

FEATURES
- No protruding ground screw
- Metal dust cover provided to keep out debris during construction
- Mounting hardware and instructions provided

APPLICATIONS
- Ceiling fan rated boxes are used to mount ceiling fans or heavy light fixtures

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	BOX DEPTH	RECOMMENDED MAX LOAD RATINGS		KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.	PACKAGING TYPE
			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.	SIDE CONDUIT	BOTTOM CONDUIT			
56112-CF	CEILING FAN PAN	1/2"	70	150	---	(5) 1/2"	5.3 (86.9)	10	CHIPBOARD
56112-CF-BULK	CEILING FAN PAN	1/2"	70	150	---	(5) 1/2"	5.3 (86.9)	10	BULK

4" ROUND CEILING FAN BOXES

1-1/2" DEEP CEILING FAN BOXES



54151-CFNB

LISTED cULus LISTED

FEATURES
- 1/2" Side knockouts
- No protruding ground screw
- Metal dust cover provided to keep out debris during construction
- Mounting hardware and instructions provided

APPLICATIONS
- Ceiling fan rated boxes are used to mount ceiling fans or heavy light fixtures

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	BOX DEPTH	RECOMMENDED MAX LOAD RATINGS		KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.	PACKAGING TYPE
			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.	SIDE CONDUIT	BOTTOM CONDUIT			
54151-CFNB	CEILING FAN BOX	1-1/2"	70	150	(2) 1/2"	(3) 1/2"	15.3 (250.7)	8	CHIPBOARD
54151-CFNB-BULK	CEILING FAN BOX	1-1/2"	70	150	(2) 1/2"	(3) 1/2"	15.3 (250.7)	20	BULK

2 1/8" DEEP CEILING FAN BOXES



54171-CFNB

LISTED cULus LISTED

FEATURES
- 1/2" Side knockouts
- No protruding ground screw
- Metal dust cover provided to keep out debris during construction
- Mounting hardware and instructions provided

APPLICATIONS
- Ceiling fan rated boxes are used to mount ceiling fans or heavy light fixtures

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	BOX DEPTH	RECOMMENDED MAX LOAD RATINGS		KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.	PACKAGING TYPE
			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.	SIDE CONDUIT	BOTTOM CONDUIT			
54171-CFNB	CEILING FAN BOX	2-1/8"	70	150	(2) 1/2"	(3) 1/2"	21.7 (355.6)	6	CHIPBOARD

4" ROUND CEILING FAN BOXES

1-1/2" DEEP NEW WORK CEILING FAN BRACES



54151-CFBH

LISTED LISTED

FEATURES
- Adjustable for joist spacing from 16" to 24"
- 1/2" Side knockouts
- Metal dust cover provided to keep out debris during construction
- Mounting hardware and instructions provided

APPLICATIONS
- New work ceiling fan braces are mounted between joists to support ceiling fans or heavy light fixtures

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	BOX DEPTH	CEILING FAN (DYNAMIC) LBS		FIXTURE (STATIC) LBS		KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			16" JOIST SPAN	24" JOIST SPAN	16" JOIST SPAN	24" JOIST SPAN	SIDE CONDUIT	BOTTOM CONDUIT		
54151-CFBH	NEW WORK CEILING FAN BRACE AND BOX - CHIPBOARD BOX	1/2"	70	70	210	90	(2) 1/2"	(2) 1/2"	15.3 (250.7)	6
54151-CFBH-BULK	NEW WORK CEILING FAN BRACE AND BOX - BULK PACKAGING	1/2"	70	70	210	90	(2) 1/2"	(2) 1/2"	15.3 (250.7)	12

1-1/2", & 2-1/8" DEEP OLD WORK CEILING FAN BRACES



54151-CFOW

LISTED LISTED

FEATURES
- Adjustable for joist spacing from 16" to 24"
- Mounting hardware and instructions provided

APPLICATIONS
- Old work ceiling fan braces are mounted between joists to support ceiling fans or heavy light fixtures


STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	BOX DEPTH	CEILING FAN (DYNAMIC) LBS		FIXTURE (STATIC) LBS		KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			16" JOIST SPAN	24" JOIST SPAN	16" JOIST SPAN	24" JOIST SPAN	SIDE CONDUIT	BOTTOM CONDUIT		
54151-CFOW	OLD WORK CEILING FAN BRACE AND BOX - CHIPBOARD BOX	1-1/2"	70	35	110	50	(2) 1/2"	(2) 1/2"	15.3 (250.7)	6
54171-CFOW	OLD WORK CEILING FAN BRACE AND BOX - CHIPBOARD BOX	2-1/8"	70	35	110	50	(2) 1/2"	(2) 1/2"	21.7 (355.6)	4

4" OCTAGON CEILING GRID/T-BAR BOXES

2-1/8" DEEP - DRAWN WITH CLAMPS, EARS 3-1/2" ON CENTER



54171-TBAR

FEATURES
- Multi-depth break-away side tabs allow box to fit snugly on any ceiling T-bar rail
- Tab on back of the box allows tie wires to be secure to ceiling structures
- Combo-head fixture mounting screws

APPLICATIONS
- 4" octagon boxes with side T-bar slots are used for low voltage applications such as security cameras and life safety systems in drop ceiling applications

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
54171-TBAR	T-BAR CEILING GRID, BACKSIDE EYELET FOR WIRE SUPPORT	(4) T-BAR SLOTS, NO KO'S	(2) 1/2"	20.0 (327.8)	25

2-1/8" DEEP - DRAWN, FIXTURE EARS 3-1/2" ON CENTER FOR CEILING FAN & FIXTURE SUPPORT IN GRID/T-BAR CEILING



54171-TBFN

FEATURES
- Mounting hardware included
- Multi-depth break-away side tabs allow box to fit snugly on any ceiling T-bar rail
- Tab on back of the box allows tie wires to be secure to ceiling structures
- Combo-head fixture mounting screws
- Box must be tied into overhead ceiling structure

APPLICATIONS
- T-Grid ceiling fan rated octagon boxes are mounted on the top side of a t-grid ceiling

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	RECOMMENDED MAX LOAD RATINGS		KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.	SIDE CONDUIT	BOTTOM CONDUIT		
54171-TBFN	T-BAR CEILING GRID, BACKSIDE EYELET FOR WIRE SUPPORT	35	150	(4) T-BAR SLOTS, (4) 1/2" - 3/4"	(2) 1/2"	20.0 (327.8)	25

5" & 8" ROUND COVERS

BLANK FINISH, STEEL, PAINTED WHITE



CBC-275

FEATURES

- Solutions for both 2-3/4" on center and 3-1/2" on center box ears
- White finished mounting screws included

APPLICATIONS

- White ceiling blank-up covers are used to cover 3-1/2" or 4" round/octagon box openings in ceilings or walls

STANDARD MATERIAL

- Galvanized steel

CBC-F



CBC-350

CBCU



CBC-275800




CBC-350800

PART #	DESCRIPTION	OUTSIDE DIAMETER	RAISED	MASTER QTY.
CBC-275	FITS FIXTURE EARS 2-3/4" ON CENTER	5" ROUND	1/4"	25
CBC-F	FITS FIXTURE EARS 2-3/4" ON CENTER	5" ROUND	FLAT	25
CBC-350	FITS FIXTURE EARS 3-1/2" ON CENTER	5" ROUND	1/4"	25
CBCU	CENTER HOLE WITH FIXTURE STRAP & SCREWS	5" ROUND	1/4"	25
CBC-275800	FITS FIXTURE EARS 2-3/4" ON CENTER	8" ROUND	3/4"	25
CBC-350800	FITS FIXTURE EARS 3-1/2" ON CENTER	8" ROUND	1"	25

DECORATIVE CEILING TRIM RINGS

STEEL AND PAINTED WHITE



CBD-800



CBD-1200

PART #	DESCRIPTION	OUTSIDE DIAMETER	MASTER QTY.
CBD-800	3-3/4" OPENING, HIDES COMPROMISED EDGES	8" ROUND	25
CBD-1200		12" ROUND	25

FEATURES

- Easily hides imperfections around boxes
- Smooth and durable white powder coating allows for easy cleaning or painting
- Trim rings are mounted between finish surface and fixture canopy

APPLICATIONS

- Steel decorative ceiling trim rings allow you to hide imperfections between the finished surface an box when installing light fixtures and ceiling fans

STANDARD MATERIAL

- Galvanized Steel

DECORATIVE HOLE COVER

STEEL AND PAINTED WHITE



CBS-800



CBS-1200

PART #	DESCRIPTION	OUTSIDE DIAMETER	MASTER QTY.
CBS-800	COVERS UP UNUSED CEILING OR WALL OPENINGS	8" ROUND	25
CBS-1200		12" ROUND	25

FEATURES

- Cover includes a slightly undersized locking bar that spans the back side of the hole damage in the drywall or plaster to provide a secure mounting
- Cover includes a slightly undersized locking bar that spans the back side of the hole damage in the drywall or plaster to provide a secure mounting
- Long center screw allows easy maneuvering of the locking bar into place
- Smooth and durable white powder coating allows easy cleaning or painting

APPLICATIONS

- Steel, decorative covers allow you to attractively cover large holes in walls or ceilings without incurring the expense and delay of a drywall repair

STANDARD MATERIAL

- Galvanized steel

RECESSED CAN LIGHT BLANK-UP COVERS

STEEL AND PAINTED WHITE



CBC-600



CBC-800



CBC-1200

FEATURES

- Smooth, white powder-coated finish blends with white ceiling paint for an attractive appearance in any finished space
- Tapered, 1/4" outside edge seats firmly against the ceiling surface
- Includes multiple spring lengths to accommodate various can depths

APPLICATIONS


- Recessed can light blank-up plate is used to cover the exposed hole left in the ceiling by unused & abandoned can lights
- It covers the entire fixture hole and prevents heat loss and risk of shock if the socket is energized and open

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	OUTSIDE DIAMETER	TAPER TO EDGE	MASTER QTY.
CBC-600	COVERS UNUSED CAN LIGHT OPENING	6" ROUND	1/4"	25
CBC-800		8" ROUND	1/4"	25
CBC-1200		12" ROUND	1/4"	25

RECESSED CAN LIGHT CONVERSION KIT

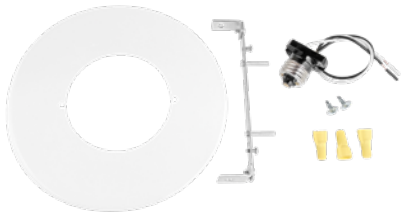

CLC-800

FEATURES

- Solutions for both 2-3/4" on center and 3-1/2" on center box ears
- White finished mounting screws included

APPLICATIONS

- White ceiling blank-up covers are used to cover 3-1/2" or 4" round/octagon box openings in ceilings or walls

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	OUTSIDE DIAMETER	MASTER QTY.
CLC-800	3.75" I.D.	8" ROUND	10

FIXTURE CANOPY STEMS

WHITE PENDANT FIXTURE STEMS – 3/8" IPS



LFS-375-12WH

FEATURES

- Use with canopy sets to mount lights and signs

APPLICATIONS

- White 12" long 3/8 in IPS light fixture stems are used in finished spaces to hang lighting fixtures from ceilings

STANDARD MATERIAL

- Galvanized steel

LFS-375-18WH



LFS-375-24WH

LFS-375-36WH



LFS-375-48WH



LFS-375-60WH



LFS-16WHT



LFS-375-NUT

PART #	LENGTH	MASTER QTY.
LFS-375-12WH	12"	1
LFS-375-18WH	18"	1
LFS-375-24WH	24"	1
LFS-375-36WH	36"	1
LFS-375-48WH	48"	1
LFS-375-60WH	60"	1
LFS-16WHT	3/8" COUPLER-WHITE	1
LFS-375-NUT	3/8" LOCKNUT	1

HIGH BAY FIXTURE HOOKS



CPMH1

FEATURES
- Includes locknut
- Setscrew prevents vibratory loosening
- Weight rating is 300kgs
- Includes gasketed cover for wet locations

APPLICATIONS
- High bay fixture hooks are used to hang light fixtures from multiple structural members
- 3/4" locknut for CPMH1
- Made of rugged malleable iron, the hook includes a through-hole for easy wiring

STANDARD MATERIAL
- Galvanized steel

PART #	HEIGHT (INCHES)	MASTER QTY.
CPMH1	3.46	25

FIXTURE LOOP

ZINC DIE CAST



71



FEATURES
- Male threaded shaft
- Weight rating is 50 lbs.

APPLICATIONS
- Use with hook to securely hang fixtures

STANDARD MATERIAL
- Zinc die cast


PART #	SIZE	UNIT CARTON	SHIP CASE	WEIGHT/ CASE	A	B
71	1/2" MALE	25	250	15	1.27"	1.12"

FIXTURE LOCKNUTS

STEEL



278



FEATURES
- Male threaded shaft

APPLICATIONS
- Use with hook to securely hang fixtures

STANDARD MATERIAL
- Zinc die cast

PART #	SIZE	UNIT CARTON	SHIP CASE	WEIGHT/ CASE	A	B
278	1/8"	100	1000	1	.625"	.20"
279	1/4"	100	1000	1	.715"	.20"
280	3/8" SQUARE	---	200	5	1"	.22"

3" X 2" SWITCH BOXES

1-1/2" DEEP - GANGABLE WITH CONDUIT KNOCKOUTS



G500

LISTED

2 HR FIRE RATED

FEATURES
- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity

APPLICATIONS
- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G500	WITH EARS	(6) 1/2"	(2) 1/2"	7.5 (122.9)	50

1-1/2" DEEP - GANGABLE WITH CLAMPS



G500-R



G500-BX



G500-OWBX

LISTED

2 HR FIRE RATED

FEATURES
- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity

APPLICATIONS
- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
G500-R	WITH EARS, NMSC CLAMPS	NMSC	(4) NM	(1) 1/2"	7.5 (122.9)	50
G500-BX	WITH EARS, MC/BX CLAMPS	MC/BX	(4) MC/BX	(1) 1/2"	7.5 (122.9)	50
G500-OWBX	WITH EARS & OLD WORK CLIPS, MC/BX CLAMPS	MC/BX	(4) MC/BX	(1) 1/2"	7.5 (122.9)	50

3" X 2" SWITCH BOXES

2" DEEP - GANGABLE WITH CONDUIT KNOCKOUTS



G600



G600-OW

FEATURES
- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity


APPLICATIONS
- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL
- Galvanized steel


CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G600	WITH EARS	(6) 1/2"	(2) 1/2"	9.0 (147.5)	50
G600-OW	WITH EARS & OLD WORK WINGS	(6) 1/2"	(2) 1/2"	9.0 (147.5)	50

2" DEEP - GANGABLE WITH CLAMPS



G600-R



G600-BX

FEATURES
- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity

APPLICATIONS
- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices


STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
G600-R	WITH EARS, NMSC CLAMPS	NMSC	(4) NM	(1) 1/2"	9.0 (147.5)	50
G600-BX	WITH EARS, MC/BX CLAMPS	MC/BX	(4) MC/BX	(1) 1/2"	9.0 (147.5)	50

3" X 2" SWITCH BOXES

2-1/4" DEEP - GANGABLE WITH CLAMPS, BEVELED BACK



G601BVR



G601BVROW

LISTED

2 HR FIRE RATED

FEATURES

- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity
- Beveled back design prevent clamp screws from protruding into back wall

APPLICATIONS

- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
G601BVR	WITH EARS, NMSC CLAMPS	NMSC	(4) NM	(1) 1/2"	10.5 (172.1)	50
G601BVROW	WITH EARS & OLD WORK CLIPS, NMSC CLAMPS	NMSC	(4) NM	(1) 1/2"	10.5 (172.1)	50

2-1/2" DEEP - GANGABLE WITH CONDUIT KNOCKOUTS



G601



G601-OW



G601-3/4

LISTED

2 HR FIRE RATED

FEATURES

- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity

APPLICATIONS

- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed


PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G601	WITH EARS	(6) 1/2"	(2) 1/2"	12.0 (196.6)	50
G601-OW	WITH EARS & OLD WORK WINGS	(6) 1/2"	(2) 1/2"	12.0 (196.6)	50
G601-3/4	WITH EARS	(6) 3/4"	(2) 3/4"	12.0 (196.6)	50

3" X 2" SWITCH BOXES

2-1/2" DEEP - GANGABLE WITH CLAMPS



G601-R



G601-OWR



G601-BX



G601-OWBX

FEATURES

- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity

APPLICATIONS

- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
  Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
G601-R	WITH EARS, NMSC CLAMPS	NMSC	(4) NM	(1) 1/2"	12.0 (196.6)	50
G601-OWR	WITH EARS & OLD WORK CLIPS, NMSC CLAMPS	NMSC	(4) NM	(1) 1/2"	12.0 (196.6)	50
G601-BX	WITH EARS, MC/BX CLAMPS	MC/BX	(4) MC/BX	(1) 1/2"	12.0 (196.6)	50
G601-OWBX	WITH EARS & OLD WORK CLIPS, MC/BX CLAMPS	MC/BX	(4) MC/BX	(1) 1/2"	12.0 (196.6)	50

3" X 2" SWITCH BOXES

2-1/2" DEEP BRACKETED BOXES
GANGABLE WITHOUT OR WITH CLAMPS




G601-F



G601-FR



G601-FBX



G601-BBX

FEATURES
- Gangable for multiple switches or device installations

APPLICATIONS
- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
G601-F	FLAT, STUD SIDE MOUNT, KO'S	---	F	(4) 1/2"	(2) 1/2"	12.0 (196.6)	25
G601-FR	FLAT, STUD SIDE MOUNT, NMSC CLAMPS	NMSC	F	(4) 1/2"	(2) 1/2"	12.0 (196.6)	25
G601-FBX	STUD FACE MOUNT, MC.BX CLAMPS	MC/BX	F	(4) 1/2"	(2) 1/2"	12.0 (196.6)	25
G601-BBX	STUD FACE MOUNT, MC/BX CLAMPS	MC/BX	B	(4) 1/2"	(1) 1/2"	12.0 (196.6)	50

3" X 2" SWITCH BOXES

2-3/4" DEEP - GANGABLE WITH CONDUIT KNOCKOUTS



G602



G602-OW



G602-3/4

FEATURES

- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall

APPLICATIONS

- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL


- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G602	WITH EARS	(6) 1/2"	(2) 1/2"	12.5 (204.84)	50
G602-OW	WITH EARS & OLD WORK WINGS	(6) 1/2"	(2) 1/2"	12.5 (204.84)	50
G602-3/4	WITH EARS	(6) 3/4"	(2) 3/4"	12.5 (204.84)	50

2-3/4" DEEP - GANGABLE WITH CLAMPS



G602-R



G602-BX

FEATURES

- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity

APPLICATIONS

- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
G602-R	WITH EARS, NMSC CLAMPS	NMSC	(4) NM	(1) 1/2"	12.5 (204.84)	50
G602-BX	WITH EARS, MC/BX CLAMPS	BMC/BX	(6) 1/2"/(4) MC/BX	(1) 1/2"	12.5 (204.84)	50

3" X 2" SWITCH BOXES

2-3/4" DEEP BRACKETED BOXES - WITHOUT OR WITH CLAMPS



G602-FR



G602-FBX

FEATURES
- Gangable for multiple switches or device installations

APPLICATIONS
- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL
- Galvanized steel


CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
G602-F	FLAT, STUD SIDE MOUNT, KO'S	---	F	(4) 1/2"	(2) 1/2"	12.5 (204.8)	25
G602-FR	FLAT, STUD SIDE MOUNT, NMSC CLAMPS	NMSC	F	(4) 1/2"	(1) 1/2"	12.5 (204.8)	25
G602-FBX	STUD FACE MOUNT, MC/BX CLAMPS	MC/BX	F	(4) 1/2"	(1) 1/2"	12.5 (204.8)	50

3-1/2" DEEP - GANGABLE WITH CONDUIT KNOCKOUTS



G603



G603-OW



G603-3/4

FEATURES
- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity

APPLICATIONS
- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices


STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed


PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G603	WITH EARS	(6) 1/2"	(2) 1/2"	17.0 (278.6)	25
G603-OW	WITH EARS & OLD WORK WINGS	(6) 1/2"	(2) 1/2"	17.0 (278.6)	50
G603-3/4	WITH EARS	(8) 3/4"	(2) 3/4"	17.0 (278.6)	25

3" X 2" SWITCH BOXES

3-1/2" DEEP - GANGABLE WITH CLAMPS



G603-R



G603-BX

UL LISTED

2 HR FIRE RATED

FEATURES

- Gangable for multiple switches or device installations
- Plaster ears allow easy cut in when outlets or switches need to be added to existing wall
- OW series includes plaster ears and side clips to secure switch box in wall cavity

APPLICATIONS

- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS


- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
G603-R	WITH EARS, NMSC CLAMPS	NMSC	(4) NM	(1) 1/2"	17.0 (278.6)	25
G603-BX	WITH EARS, MC/BX CLAMPS	MC/BX	(6) 1/2"/(4) MC/BX	(1) 1/2"	17.0 (278.6)	25

3-1/2" DEEP BRACKETED BOXES - WITHOUT OR WITH CLAMPS



G603-F

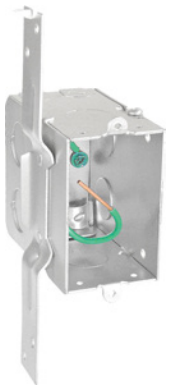

G603-FR



G603-FBX

UL LISTED

2 HR FIRE RATED

FEATURES

- Gangable for multiple switches or device installations

APPLICATIONS

- Switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Gangable switch boxes allow installer to construct a box to hold multiple devices

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	CLAMP TYPE	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
G603-F	FLAT, STUD SIDE MOUNT, KO'S	---	F	(4) 1/2"	(2) 1/2"	17.0 (278.6)	25
G603-FR	FLAT, STUD SIDE MOUNT, NMSC CLAMPS	NMSC	F	(4) 1/2"	(1) 1/2"	17.0 (278.6)	25
G603-FBX	STUD FACE MOUNT, MC.BX CLAMPS	MC/BX	F	(4) 1/2"	(1) 1/2"	17.0 (278.6)	25

LARGE CAPACITY BRACKETED MULTI-DEVICE SWITCH BOXES

WELDED WITH CONDUIT KNOCKOUTS, 1/2" BRACKET SET BACK



TB-325-F

UL LISTED

FEATURES

- Large capacity design is perfect for large GFCI devices or dimmers

APPLICATIONS

- Multiple device switch boxes are used to support three or more toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Multi device boxes are perfect for commercial Applications where multiple point lighting controls is necessary

STANDARD MATERIAL


- Galvanized steel

CERTIFICATIONS

- UL Listed




TB-425-F



TB-525-F



TB-335-F



TB-435-F

PART #	DESCRIPTION	BOX DEPTH	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT	BOTTOM CONDUIT		
TB-325-F	3 GANG, FLAT, STUD SIDE MNT, CONCENTRIC KO'S	2-1/2"	F	(8) 1/2" – 3/4"	(6) 1/2" – 3/4"	45.0 (737.5)	5
TB-425-F	4 GANG, FLAT, STUD SIDE MNT, CONCENTRIC KO'S	2-1/2"	F	(10) 1/2" – 3/4"	(8) 1/2" – 3/4"	59.0 (966.9)	5
TB-525-F	5 GANG, FLAT, STUD SIDE MNT, CONCENTRIC KO'S	2-1/2"	F	(12) 1/2" – 3/4"	(10) 1/2" – 3/4"	74.0 (1212.7)	5
TB-335-F	3 GANG, FLAT, STUD SIDE MNT, CONCENTRIC KO'S	3-1/2"	F	(14) 1/2" – 3/4"	(6) 1/2" – 3/4"	65.0 (1065.2)	5
TB-435-F	4 GANG, FLAT, STUD SIDE MNT, CONCENTRIC KO'S	3-1/2"	F	(18) 1/2" – 3/4"	(8) 1/2" – 3/4"	87.0 (1425.7)	5

MULTI-DEVICE SWITCH BOXES


2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



MGSB-2



MGSB-3



MGSB-4



MGSB-20W



MGSB-30W



MGSB-40W

FEATURES

- Large capacity design is perfect for large GFCI devices or dimmers
- Drawn design for exposed surface mount applications
- OW series includes plaster ears and side clips to secure switch box in wall cavity

APPLICATIONS

- Multiple device switch boxes are used to support three or more toggle switches, duplex devices, decorative devices and a variety of electrical outlets
- Multi device boxes are perfect for commercial application where multiple point lighting controls is necessary

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
MGSB-2	2 DEVICE, RAISED GROUND, CONCENTRIC KO'S	(2) 1/2" & (4) 1/2" – 3/4"	(4) 1/2" & (2) 3/4"	30.3 (496.6)	25
MGSB-3	3 DEVICE, FLAT BOTTOM, CONCENTRIC KO'S	(4) 1/2" & (6) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	44.0 (721.1)	25
MGSB-4	4 DEVICE, FLAT BOTTOM, CONCENTRIC KO'S	(4) 1/2" & (8) 1/2" – 3/4"	(4) 1/2" & (3) 3/4"	57.8 (947.2)	20
MGSB-20W	2 DEVICE, OLD WORK WITH EARS & CLIPS, CONCENTRIC KO'S	(4) 1/2" & (4) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.6)	25
MGSB-30W	3 DEVICE, OLD WORK WITH EARS & CLIPS, CONCENTRIC KO'S	(6) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	44.0 (721.1)	25
MGSB-40W	4 DEVICE, OLD WORK WITH EARS & CLIPS, CONCENTRIC KO'S	(8) 1/2" – 3/4"	(4) 1/2" & (3) 3/4"	57.8 (947.2)	20

MULTI-DEVICE BRACKETED BOXES

2-1/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS
1/2" BRACKET SET BACK



MGSB-2F



MGSB-3F



MGSB-4F

FEATURES
- Large capacity design is perfect for large GFCI devices or dimmers

APPLICATIONS
- Multiple device switch boxes are used to support three or more toggle switches, duplex devices, decorative devices and a variety of electrical outlets

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

UL LISTED

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
MGSB-2F	2 DEVICE, STUD SIDE MOUNT, CONCENTRIC KO'S	F	(3) 1/2" & (3) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.6)	25
MGSB-3F	3 DEVICE, STUD SIDE MOUNT, CONCENTRIC KO'S	F	(1) 1/2" & (6) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	44.0 (721.1)	20
MGSB-4F	4 DEVICE, STUD SIDE MOUNT, CONCENTRIC KO'S	F	(2) 1/2" & (8) 1/2" – 3/4"	(4) 1/2" & (3) 3/4"	57.8 (947.2)	5

DEVICE LEVELER/RETAINER



DLC

UL LISTED

FEATURES
- Flat, C-shape design provides for easy installation

APPLICATIONS
- Device leveler is used to support switches, outlets and devices in over-sized drywall openings. Helps prevent device from being pushed back into wall opening

STANDARD MATERIAL
- Zinc plated steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	MASTER QTY.
DLC	HEIGHT 4.25" X WIDTH 2.30", ZINC PLATED STEEL	100

MADISON STRAP

OLD WORK BOX SUPPORTS, STEEL, GALVANIZED



102

LISTED

FEATURES

- Available in two lengths for shallow or deep switch boxes

APPLICATIONS

- Madison strap is used to secure a switch box in a hollow wall cavity of drywall or plaster


STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	INNER QTY	MASTER QTY.
102	2-1/4" LEGS. BULK	100 PAIRS	500 PAIRS

3" X 2" GANGABLE SWITCH BOX PARTITION

FOR 3-1/2" DEEP BOXES



GBD-350

APPLICATIONS

- Switch box partition is used to separate power and data within two 3-1/2" deep gangable 3" x 2" switch boxes

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	MASTER QTY.
GBD-350	FOR 3-1/2" DEEP SWITCH BOXES	25

3" X 2" SWITCH BOX EXTENSION



SBEX

PART #	DESCRIPTION	MASTER QTY.
SBEX	SWITCH BOX EXTENSION	50

FEATURES
- Telescoping design adjusts to proper wall depth
- Adjustment range 1/4" to 1"
- Hardware included
- This product is subject to acceptance by an electrical inspector


APPLICATIONS
- Switch box extension rings are used to add depth to existing single device or two device box
- Creates barrier between wall surface and wiring system

STANDARD MATERIAL
- Galvanized steel

SWITCH BOX EARS AND CLIPS



OWE



OWC

PART #	DESCRIPTION	MASTER QTY.
OWE	OLD WORK BOX - EARS	100
OWC	OLD WORK BOX - CLIPS	100 (50 PAIRS)

FEATURES
- Old work ears are 2-screw, ear type
- Old work box clips are designed to be used with 1/2" or 5/8" thick standard drywall
- One pair of ears and clips are required per box to secure in wall

APPLICATIONS
- Switch box old work plaster ears catch on wall surfaces to prevent boxes from falling in hollow wall
- Old work box clips are used to convert standard switch boxes to old work boxes

STANDARD MATERIAL
- Galvanized steel

DOOR JAM SWITCH KITS

COMPLETE KITS



DJSKWH



DJSK

PART #	DESCRIPTION	COLOR	MASTER QTY.
DJSKWH	INCLUDES BOX, PLATE, SWITCH, WIRE LEADS	WHITE	10
DJSK		TAN	10


PRODUCT FEATURES
- Switch contains a normally-closed contact so that the circuit will be ON when the door is open
- Kit consists of a push-button switch with a metal box and a cover plate
- Mounting hardware is included

APPLICATIONS
- Door Jamb Switch Kit mounts in a door jamb to activate lights or other electrical items when the door is open
- All purpose switch for indoor use on sliding or hinged doors in locations like closets, darkrooms, and walk-in refrigerators

STANDARD MATERIAL
- Galvanized steel

MINI HANDY/UTILITY BOX

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS, 3-3/4" H X 1-1/2" W



G19180-BLNK



G19180

UL LISTED

FEATURES
- Available with or without knockouts

APPLICATIONS
- Mini handy boxes are ideal for tight spaces in stud walls or when limited surface mounting space is available
- Mini handy boxes are used as a junction box, not used for device installations

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G19180-BLNK*	BLANK, FLAT BOTTOM	---	---	6.8 (111.4)	50
G19180	FLAT BOTTOM	(8) 1/2"	(3) 1/2"	6.8 (111.4)	50

*Not UL Listed

MINI HANDY/UTILITY BOX FLAT COVERS

3-3/4" H X 1-1/2" W



G19190

UL LISTED c UL us LISTED

FEATURES
- Captive cover screws for easy installation

APPLICATIONS
- Mini handy boxes covers are used to close a mini handy box as a junction point

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
G19190	BLANK WITH CAPTIVE SCREWS	50

4" X 2" HANDY/UTILITY BOX

1-1/4" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



G19279

FEATURES
- Small, rectangular design that allow for power outlets and switches to be installed in limited space applications
- Raised ground provision ensures ground screw will not interfere with wall surface

APPLICATIONS
- 1-1/4 " deep handy utility boxes are extra shallow for applications with limited wall depth
- They are used for convenience outlets, switches and small junction boxes in exposed work applications and can be used for appliances and machinery

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G19279	RAISED GROUND	(8) 1/2"	(2) 1/2"	9.5 (155.7)	50

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



G19280-S



G19280

FEATURES
- Raised ground provision ensures ground screw will not interfere with wall surface

APPLICATIONS
- Handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G19280-S	RAISED GROUND	(4) 1/2" & (2) 3/4, (2) 1/2" & 3/4" CONCENTRIC	(1) 3/4"	11.5 (188.5)	50
G19280	RAISED GROUND,	(8) 1/2"	(2) 1/2"	11.5 (188.5)	50

4" X 2" HANDY/UTILITY BOX

1-7/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



G19281

LISTED

2 HR FIRE RATED

FEATURES

- Raised ground provision ensures ground screw will not interfere with wall surface (reference table)

APPLICATIONS

- Handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL



G19281NGH



G19281-3/4



G19281-SS



G19281-S-3/4



G19281-3/4GS



G19281-1/2-3/4



G19281-S



G19281-1/2-3/4GS



G19281-BLNKSS

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G19281	RAISED GROUND	(8) 1/2"	(2) 1/2"	13.0 (213.0)	50
G19281NGH	FLAT BOTTOM	(8) 1/2"	(3) 1/2"	13.0 (213.0)	50
G19281-3/4	RAISED GROUND	(6) 3/4"	(2) 1/2"	13.0 (213.0)	50
G19281-SS	RAISED GROUND, 304 STAINLESS STEEL	(8) 1/2"	(2) 1/2"	13.0 (213.0)	50
G19281-S-3/4	FLAT BOTTOM	(4) 3/4" & (2) 1/2" & 3/4" CONCENTRIC	(2) 3/4"	13.0(213)	50
G19281-3/4GS	RAISED GROUND WITH 10/32 GROUND SCREW	6) 3/4"	(1) 3/4"	13.0(213)	50
G19281-1/2-3/4	FLAT BOTTOM	(4) 1/2", (4) 3/4"	(2) 1/2" & (1) 3/4"	13.0(213)	50
G19281-S	FLAT BOTTOM	(6) 1/2" & 3/4" CONCENTRIC	(2) 3/4"	13.0(213)	50
G19281-1/2-3/4GS	RAISED GROUND WITH 10/32 GROUND SCREW	(4) 1/2" & (4) 3/4"	(1) 1/2" & (1) 3/4"	13.0(213)	50
G19281-BLNKSS *	BLANK, 304 STAINLESS STEEL	---	---	13.0(213)	50

*Not UL Listed

4" X 2" HANDY/UTILITY BOX

1-7/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



G19281-AB



G19281-F

LISTED

2 HR FIRE RATED

FEATURES
- Side or face mount stud brackets available

APPLICATIONS
- Handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
G19281-AB	STUD FACE MOUNT, 1/2" SET BACK	AB	(5) 1/2"	(3) 1/2"	13.0 (213.0)	25
G19281-F	FLAT, STUD SIDE MOUNT, 1/2" SET BACK	F	(5) 1/2"	(3) 1/2"	13.0 (213.0)	25

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



G19282

LISTED

2 HR FIRE RATED

FEATURES
- Raised ground provision ensures ground screw will not interfere with wall surface (reference table)

APPLICATIONS
- Handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL



G19282NGH



G19282-3/4



G19282-BLNK



G19282-BLNKSS



G19282-SS

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G19282	RAISED GROUND	(8) 1/2"	(2) 1/2"	13.5 (221.2)	50
G19282NGH	FLAT BOTTOM	(8) 1/2"	(3) 1/2"	13.5 (221.2)	50
G19282-3/4	RAISED GROUND	(6) 3/4"	(2) 1/2"	13.5 (221.2)	50
G19282-BLNK *	BLANK, NO KO'S	---	---	13.5 (221.2)	50
G19282-BLNKSS *	BLANK, 316 STAINLESS STEEL	---	---	13.5 (221.2)	50
G19282-SS	RAISED GROUND, 316 STAINLESS STEEL	(8) 1/2"	(2) 1/2"	13.5 (221.2)	50
G19282-1/2-3/4	FLAT BOTTOM	(6) 1/2" AND (2) 3/4"	(2) 1/2"	13.5 (221.2)	50

*Not UL Listed

4" X 2" HANDY/UTILITY BRACKETED BOX

2-1/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



G19282-AB



G19282-F

FEATURES
- Side or face mount stud brackets available

APPLICATIONS
- Handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
G19282-AB	STUD FACE MOUNT, 1/2" SET BACK	AB	(5) 1/2"	(3) 1/2"	13.5 (221.2)	25
G19282-F	FLAT, STUD SIDE MOUNT, 1/2" SET BACK	F	(5) 1/2"	(3) 1/2"	13.5 (221.2)	25

4" X 2" HANDY/UTILITY BOX

2-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



4SSLD-1/2

FEATURES
- 2-1/8" depth accommodates large devices such as dimmers and GFCI's

APPLICATIONS
- Handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
4SSLD-1/2	FLAT BOTTOM	(8) 1/2"	(2) 1/2"	18.3 (299.9)	50

4" X 2" HANDY/UTILITY EXTENSION RINGS

1-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



G19280-E

LISTED

FEATURES
- Key hole mounting for easy installation

APPLICATIONS
- Handy box extension rings are added to 4" x 2" handy boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT		
G19280-E	WITH KEYHOLE MOUNTING HOLES	WELDED	(8) 1/2"	11.5 (188.5	50

1-7/8" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS



G19281-E

LISTED

FEATURES
- Key hole mounting for easy installation

APPLICATIONS
- Handy box extension rings are added to 4" x 2" handy boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT		
G19281-E	WITH KEYHOLE MOUNTING HOLES	WELDED	(8) 1/2"	13.0 (213.0)	25

4" X 2" HANDY/UTILITY BOX COVERS



G19290

UL LISTED c UL US LISTED

FEATURES
- Captive cover screws

APPLICATIONS
- Handy box covers are used to close a 4" x 2" handy box or to attach a device(s) in a surface mount industrial or commercial setting

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL, cULus Listed



G19430



G19530



G19380



G19350



BPO-19350



BP-19350



G19470



G19390



G19320



G19420



G19290-SS

PART #	DESCRIPTION	MASTER QTY.
G19290	BLANK	100
G19430	1/2" KO CENTERED	100
G19530	(1) 1/2" – 3/4" & (1) OPEN 1/2" KO	25
G19380	DUPLEX	100
G19350	TOGGLE	100
BPO-19350	TOGGLE, OIL BURNER, RED	25
BP-19350	TOGGLE, GAS BURNER, RED	25
G19470	GFCI	100
G19390	.47" DIAMETER	25
G19320	1.406" DIAMETER	25
G19420	20A 1.594" DIAMETER	25
G19290-SS	BLANK, 316 STAINLESS STEEL	25

4-1/8" X 2-1/2" OVERSIZED HANDY/UTILITY BOX

1-7/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



G20281

LISTED

2 HR FIRE RATED

FEATURES
- Large, oversized design with additional height and width

APPLICATIONS
- Oversized handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications
- Additional height and width are perfect for large dimmer devices or large devices with side terminals

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
G20281	RAISED GROUND	(8) 1/2"	(2) 1/2"	16.5 (270.4)	50

OVERSIZED HANDY/UTILITY COVERS

4-1/8"H X 2-1/2" W



G20290

LISTED

c UL US LISTED

FEATURES
- Captive cover screws

APPLICATIONS
- Oversized handy box covers are designed specifically to fix oversized handy boxes
- Various covers are available to accommodate a wide range for wiring device types and styles

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed



G20430



G20380



G20350



G20470




G20320

PART #	DESCRIPTION	MASTER QTY.
G20290	BLANK	25
G20430	1/2" KO CENTERED	25
G20380	DUPLEX	25
G20350	TOGGLE	25
G20470	GFCI	25
G20320	1.406" DIAMETER	25

GANG BOXES

WELDED WITH CONDUIT KNOCKOUTS



GB-1582

UL LISTED

FEATURES

- Concentric Knockouts

APPLICATIONS

- Multi-gang boxes are used when multiple electrical or low voltage devices must be mounted in one location
- They can also be used as large capacity junction boxes

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	DEPTH	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
GB-1582	2 GANG	1-5/8"	(12) 1/2" – 3/4"	(4) 1/2", (2) 3/4"	46.0 (753.8)	25
GB-1583	3 GANG	1-5/8"	(14) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	58.5 (958.7)	20
GB-1584	4 GANG	1-5/8"	(16) 1/2" – 3/4"	(16) 1/2", (4) 3/4"	71.0 (1163.5)	20
GB-1585	5 GANG	1-5/8"	(18) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	81.0 (1327.4)	10
GB-1586	6 GANG	1-5/8"	(20) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	95.0 (1556.8)	5
GB-1587	7 GANG	1-5/8"	(22) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	108.5 (1777.9)	5
GB-1588	8 GANG	1-5/8"	(24) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	122.0 (1999.3)	5
GB-2122	2 GANG	2-1/2"	(12) 1/2" – 3/4"	(4) 1/2", (2) 3/4"	71.0 (1163.5)	25
GB-2122341	2 GANG	2-1/2"	(8) 3/4" – 1"& (4) 1/2" – 3/4"	(4) 1/2", (2) 3/4"	71.0 (1163.5)	25
GB-2123	3 GANG	2-1/2"	(14) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	90.5 (1483.1)	20
GB-2123341	3 GANG	2-1/2"	(10) 3/4" – 1" & (4) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	90.5 (1483.1)	20
GB-2124	4 GANG	2-1/2"	(16) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	111.8 (1832.1)	20
GB-2124341	4 GANG	2-1/2"	(12) 3/4" – 1" & (4) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	111.8 (1832.1)	20
GB-2125	5 GANG	2-1/2"	(18) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	128.5 (2105.8)	10
GB-2125341	5 GANG	2-1/2"	(14) 3/4" – 1" & (4) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	128.5 (2105.8)	10
GB-2126	6 GANG	2-1/2"	(20) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	148.0 (2425.3)	5
GB-2126341	6 GANG	2-1/2"	(16) 3/4" – 1" & (4) 1/2" - 3/4"	(6) 1/2", (4) 3/4"	148.0 (2425.3)	5
GB-2127	7 GANG	2-1/2"	(22) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	169.5 (2777.7)	5
GB-2127341	7 GANG	2-1/2"	(18) 3/4" – 1" & (4) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	169.5 (2777.7)	5
GB-2128	8 GANG	2-1/2"	(24) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	188.8 (3093.9)	5
GB-2128341	8 GANG	2-1/2"	(20) 3/4" – 1" & (4) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	188.8 (3093.9)	5
GB-2129	9 GANG	2-1/2"	(26) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	208.0 (3408.6)	5
GB-2129341	9 GANG	2-1/2"	(22) 3/4" – 1", (4) 1/2" – 3/4"	(6) 1/2", (4) 3/4"	208.0 (3408.6)	5



GB-1583



GB-1584



GB-1585



GB-1586



GB-1587



GB-1588



GB-2122



GB-2122341



GB-2123



GB-2123341



GB-2124



GB-2124341



GB-2125



GB-2125341



GB-2126



GB-2126341



GB-2127



GB-2127341



GB-2128



GB-2128341




GB-2129



GB-2129341

GANG BOX EXTENSION RINGS

WELDED WITH CONDUIT KNOCKOUTS

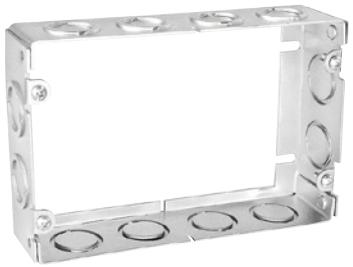

GBEX-1582

FEATURES

- Concentric Knockouts

APPLICATIONS

- Multi-gang box extension rings are mounted to the same length existing box to provide additional wire capacity when needed
- Gang box extension rings save the installer time and money by eliminating the need to remove old boxes, connectors and devices when more wire capacity is required

STANDARD MATERIAL

- Galvanized steel



GBEX-1583



GBEX-1584



GBEX-1585



GBEX-1586



GBEX-1587



GBEX-1588



GBEX-2122



GBEX-2123



GBEX-2124



GBEX-2125



GBEX-2126



GBEX-2127



GBEX-2129

PART #	DESCRIPTION	DEPTH	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
GBEX-1582	2 GANG	1-5/8"	(12) 1/2" – 3/4"	46.0 (753.8)	25
GBEX-1583	3 GANG		(14) 1/2" – 3/4"	58.5 (958.7)	20
GBEX-1584	4 GANG		(16) 1/2" – 3/4"	71.0 (1163.5)	20
GBEX-1585	5 GANG		(18) 1/2" – 3/4"	81.0 (1327.4)	10
GBEX-1586	6 GANG		(20) 1/2" – 3/4"	95.0 (1556.8)	5
GBEX-1587	7 GANG		(22) 1/2" – 3/4"	108.5 (1777.9)	5
GBEX-1588	8 GANG		(24) 1/2" – 3/4"	122.0 (1999.3)	5
GBEX-2122	2 GANG	2-1/2"	(12) 1/2" – 3/4"	71.0 (1163.5)	25
GBEX-2123	3 GANG		(14) 1/2" – 3/4"	90.5 (1483.1)	20
GBEX-2124	4 GANG		(16) 1/2" – 3/4"	111.8 (1832.1)	20
GBEX-2125	5 GANG		(18) 1/2" – 3/4"	128.5 (2105.8)	10
GBEX-2126	6 GANG		(20) 1/2" – 3/4"	148.0 (2425.3)	5
GBEX-2127	7 GANG		(22) 1/2" – 3/4"	169.5 (2777.7)	5
GBEX-2129	9 GANG		(26) 1/2" – 3/4"	208.0 (3408.6)	5

GANG BOX DEVICE RINGS

NON-ADJUSTABLE



GBDC-122



GBDC-123



GBDC-124



GBDC-125



GBDC-126



GBDC-127



GBDC-128



GBDC-129



GBDC-342



GBDC-343



GBDC-344



GBDC-345



GBDC-346



GBDC-347



GBDC-348



GBDC-349

FEATURES

- Each cover fits corresponding box size and one box size smaller

APPLICATIONS

- Multi-gang raised device covers are used when multiple electrical or low voltage devices must be installed in finished wall applications
- Gang box raised device covers allow the installer to mount multiple devices in one box location and attach finished wall plates flush with interior drywall plaster or tile

STANDARD MATERIAL

- Galvanized steel


CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
GBDC-122	2 GANG	1/2"	8.0 (131.1)	25
GBDC-123	3 GANG		11.5 (188.5)	20
GBDC-124	4 GANG		14.8 (242.6)	10
GBDC-125	5 GANG		17.5 (286.8)	10
GBDC-126	6 GANG		20.3 (332.7)	10
GBDC-127	7 GANG		24.0 (393.3)	5
GBDC-128	8 GANG		26.8 (439.2)	5
GBDC-129	9 GANG		31.8 (521.2)	5
GBDC-342	2 GANG	3/4"	11.0 (180.3)	20
GBDC-343	3 GANG		17.0 (278.58)	10
GBDC-344	4 GANG		21.5 (352.4)	10
GBDC-345	5 GANG		26.0 (426.1)	10
GBDC-346	6 GANG		30.5 (499.9)	10
GBDC-347	7 GANG		36.0 (589.9)	5
GBDC-348	8 GANG		41.3 (676.8)	5
GBDC-349	9 GANG		46.3 (758.8)	5

GANG BOXES DEVICE RINGS

ADJUSTABLE



AMR3



AMR4

FEATURES

- Design allows a perfect flush installation to finished surfaces, ensuring that devices are securely fastened and well grounded to rings

APPLICATIONS

- Adjustable raised device rings are used with mating multi-gang boxes
- Covers are used in ceilings, walls and floors when finished surface depth is unknown or in question

STANDARD MATERIAL

- Galvanized steel

PART #	DESCRIPTION	RAISED ADJUSTMENT	MASTER QTY.
AMR3	3 GANG	3/4" TO 1-1/2"	20
AMR4	4 GANG		5

GANG BOXES AND DEVICE PARTITIONS

ZINC PLATED STEEL



GBP-158-F



GBP-15812



GBP-15834



GBP-212-F



GBP-21212



GBP-21234

FEATURES

- Dividers create a shield between power and low voltage signals that prevents electrical interference and disturbance all the way up to the finished surface

APPLICATIONS

- Partitions/dividers are used to separate low voltage and electrical power devices when they are installed next to each other in a multi-gang box

STANDARD MATERIAL

- Zinc plated steel

CERTIFICATIONS

- UL, cULus Listed (excludes 4, 5, 6 gang)

PART #	DESCRIPTION	FOR BOX DEPTH	MASTER QTY.
GBP-158-F	FOR FLAT COVERS	1-5/8"	50
GBP-15812	FOR 1/2" RAISED COVERS		50
GBP-15834	FOR 3/4"RAISED COVERS		50
GBP-212-F	FOR FLAT COVERS	2-1/2"	50
GBP-21212	FOR 1/2" RAISED COVERS		50
GBP-21234	FOR 3/4"RAISED COVERS		50

GANG BOX STEP DOWN RINGS



GBSD-3150

FEATURES

- Device opening is raised 1/2" for drywall and provides 6-32 mounting tabs

APPLICATIONS

- Allows larger multi gang boxes to be used when fewer devices are needed to complete installation

STANDARD MATERIAL

- Galvanized steel



GBSD-3250



GBSD-4150



GBSD-4250



GBSD-4350



GBSD-3175



GBSD-3275



GBSD-4175



GBSD-4275



GBSD-4375

PART #	DESCRIPTION	DOWN TO DEVICE OPENINGS	RAISED	MASTER QTY.
GBSD-3150	FITS 3 GANG BOX	1	1/2"	5
GBSD-3250	FITS 3 GANG BOX	2		5
GBSD-4150	FITS 4 GANG BOX	1		5
GBSD-4250	FITS 4 GANG BOX	2		5
GBSD-4350	FITS 4 GANG BOX	3		5
GBSD-3175	FITS 3 GANG BOX	1	3/4"	5
GBSD-3275	FITS 3 GANG BOX	2		5
GBSD-4175	FITS 4 GANG BOX	1		5
GBSD-4275	FITS 4 GANG BOX	2		5
GBSD-4375	FITS 4 GANG BOX	3		5

GANG BOX FLAT COVERS



GBBC-2

UL LISTED c UL us LISTED

FEATURES
- Slotted mounting holes for quick installation and adjustment

APPLICATIONS
- Multi-gang box flat covers are used to cover electrical wires and connectors inside multi gang boxes

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	FITS BOX	NUMBER OF DEVICE OPENINGS	MASTER QTY.
GBBC-2	BLANK	2 GANG	---	5
GBBC-3		3 GANG		5
GBBC-4		4 GANG		5
GBBC-5		5 GANG		5
GBBC-6		6 GANG		1
GBBC-7		7 GANG		1
GBBC-8		8 GANG		1
GBBC-9		9 GANG		1
GBTC-2	TOGGLE SWITCH	2 GANG	2	20
GBTC-3		3 GANG	3	20
GBTC-4		4 GANG	4	10
GBTC-5		5 GANG	5	10
GBTC-6		6 GANG	6	5
GBTC-7		7 GANG	7	5
GBTC-8		8 GANG	8	5
GBTC-9		9 GANG	9	5
GBGFI-2	DECORATOR	2 GANG	2	5
GBGFI-3		3 GANG	3	5
GBGFI-4		4 GANG	4	5
GBGFI-5		5 GANG	5	5
GBGFI-6		6 GANG	6	1
GBGFI-7		7 GANG	7	1
GBGFI-8		8 GANG	8	1
GBGFI-9		9 GANG	9	1
GBDUP-2	DUPLEX OPENINGS	2 GANG	2	5
GBDUP-3		3 GANG	3	5
GBDUP-4		4 GANG	4	5
GBDUP-5		5 GANG	5	5
GBDUP-6		6 GANG	6	1
GBDUP-7		7 GANG	7	1
GBDUP-8		8 GANG	8	1


GBBC-3


GBBC-4


GBBC-5


GBBC-6


GBBC-7


GBBC-8


GBBC-9


GBTC-2


GBTC-3


GBTC-4


GBTC-5


GBTC-6



GBTC-7



GBTC-8



GBTC-9



GBGFI-2



GBGFI-3



GBGFI-4


GBGFI-5


GBGFI-6



GBGFI-7



GBGFI-8

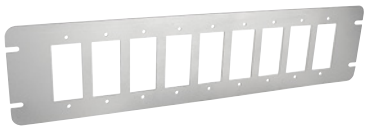

GBGFI-9



GBDUP-2


GBDUP-3


GBDUP-4


GBDUP-5


GBDUP-6


GBDUP-7


GBDUP-8

MASONRY BOX

NON-GANGABLE, 2-1/2" & 3-1/2" DEEP - WTH CONDUIT KNOCKOUTS



TB-125

UL LISTED

FEATURES
- Concentric combination Knockouts

APPLICATIONS
- Masonry boxes are used as a junction box or to secure a wiring device in masonry block construction
- 2-1/2" deep boxes are used in 4" block walls, 3-1/2" deep boxes are used in 6" or 8" block walls

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed



TB-225



TB-325



TB-425



TB-525



TB-625




TB-135



TB-235



TB-335



TB-435



TB-535



TB-635

PART #	DESCRIPTION	BOX DEPTH	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
TB-125	1 GANG	2-1/2"	(6) 1/2" – 3/4"	(2) 1/2" – 3/4"	13.8 (226.2)	20
TB-225	2 GANG		(8) 1/2" – 3/4"	(4) 1/2" – 3/4"	30.0 (491.7)	10
TB-325	3 GANG		(10) 1/2" – 3/4"	(6) 1/2" – 3/4"	45.0 (737.5)	10
TB-425	4 GANG		(12) 1/2" – 3/4"	(8) 1/2" – 3/4"	59.0 (966.9)	5
TB-525	5 GANG		(14) 1/2" – 3/4"	(10) 1/2" – 3/4"	74.0 (1212.7)	5
TB-625	6 GANG		(16) 1/2" – 3/4"	(12) 1/2" – 3/4"	92.0 (1507.7)	1
TB-135	1 GANG	3-1/2"	(8) 1/2" – 3/4"	(2) 1/2" – 3/4"	21.0 (344.2)	20
TB-235	2 GANG		(12) 1/2" – 3/4"	(4) 1/2" – 3/4"	44.0 (721.1)	10
TB-335	3 GANG		(16) 1/2" – 3/4"	(6) 1/2" – 3/4"	65.0 (1065.2)	10
TB-435	4 GANG		(20) 1/2" – 3/4"	(8) 1/2" – 3/4"	87.0 (1425.7)	5
TB-535	5 GANG		(24) 1/2" – 3/4"	(10) 1/2" – 3/4"	108.0 (1769.8)	1
TB-635	6 GANG		(28) 1/2" – 3/4"	(12) 1/2" – 3/4"	130.0 (2130.4)	1

MASONRY BOX

NON-GANGABLE, 2-1/2" & 3-1/2" DEEP WITH CONDUIT KNOCKOUTS



CB-1250

LISTED

FEATURES
- Concentric combination Knockouts

APPLICATIONS
- Masonry boxes are used as a junction box or to secure a wiring device in masonry block construction
- 2-1/2" deep boxes are used in 4" block walls, 3-1/2" deep boxes are used in 6" or 8" block walls

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed



CB-2250



CB-3250



CB-1350



CB-2350



CB-3350

PART #	DESCRIPTION	BOX DEPTH	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
CB-1250	1 GANG WITH MORTAR BRACKET	2-1/2"	(6) 1/2" – 3/4"	(2) 1/2" – 3/4"	14.0 (229.5)	25
CB-2250	2 GANG WITH MORTAR BRACKET		(8) 1/2" – 3/4"	(4) 1/2" – 3/4"	28.0 (459.0)	10
CB-3250	3 GANG WITH MORTAR BRACKET		(10) 1/2" – 3/4"	(6) 1/2" – 3/4"	42.0 (688.5)	10
CB-1350	1 GANG WITH MORTAR BRACKET	3-1/2"	(6) 1/2" – 3/4"	(2) 1/2" – 3/4"	21.0 (344.2)	25
CB-2350	2 GANG WITH MORTAR BRACKET		(8) 1/2" – 3/4"	(4) 1/2" – 3/4"	42.0 (688.4)	10
CB-3350	3 GANG WITH MORTAR BRACKET		(10) 1/2" – 3/4"	(6) 1/2" – 3/4"	63.0 (1032.6)	10

MASONRY BOX AND DEVICE PARTITIONS

FOR NON – GANGABLE MASONRY BOXES



TBD-250



TBD-350

FEATURES
- Made from non-conductive, plastic material


APPLICATIONS
- Masonry box partition is used to separate power and data within a multi gang masonry box

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	FOR BOX DEPTH	MASTER QTY.
TBD-250	SNAP-IN MASONRY BOX DEVICE PARTITION	2-1/2"	50
TBD-350		3-1/2"	50

MASONRY BOX

3 GANG TOGGLE COVER



MBC3T

FEATURES
- Made from unfinished, pre–Galvanized steel
- .43" cover height

APPLICATIONS
- Three device toggle switch cover fits all three gang masonry boxes (devices not included)

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	MASTER QTY.
MBC3T	(6) 6-32 MOUNTING HARDWARE INCLUDED	25

MASONRY BOX AND EXTENSION RINGS

1/2" & 3-1/2" DEEP - WITH CONDUIT KNOCKOUTS



TBX-125

LISTED

FEATURES

- Concentric combination knockouts
- Extension 6-32 mounting hardware included

APPLICATIONS

- Masonry box extension rings are added to masonry boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed



TBX-225



TBX-325



TBX-425



TBX-525



TBX-135



TBX-235



TBX-335



TBX-435



TBX-535

PART #	DESCRIPTION	EXTENSION RING DEPTH	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
TBX-125	1 GANG	2-1/2"	(6) 1/2" – 3/4"	14.0 (229.5)	5
TBX-225	2 GANG		(8) 1/2" – 3/4"	28.0 (459.0)	5
TBX-325	3 GANG		(10) 1/2" – 3/4"	42.0 (688.5)	5
TBX-425	4 GANG		(12) 1/2" – 3/4"	56.0 (918.0)	5
TBX-525	5 GANG		(14) 1/2" – 3/4"	70.0 (1147.5)	5
TBX-135	1 GANG	3-1/2"	(6) 1/2" – 3/4"	21.0 (344.2)	5
TBX-235	2 GANG		(8) 1/2" – 3/4"	42.0 (688.4)	5
TBX-335	3 GANG		(10) 1/2" – 3/4"	63.0 (1032.6)	5
TBX-435	4 GANG		(12) 1/2" – 3/4"	84.0 (1376.8)	5
TBX-535	5 GANG		(14) 1/2" – 3/4"	105.0 (1721.0)	5

CONCRETE RINGS

2-1/2" & 3-1/2" DEEP - WITH CONDUIT KNOCKOUTS



OCR-200



OCR-250



OCR-300



OCR-350




OCR-400



OCR-500



OCR-600



OCR-300341



OCR-350341



OCR-400341



OCR-400FAN

FEATURES

- Extra long external mounting tabs allow easy installation by nailing or screwing the boxes to wooden or steel concrete forms
- Knockouts are sealed against box surface to prevent concrete slurry and water from entering the box
- The top covers are removable allowing any before-pour work (sold separately)

APPLICATIONS

- Octagon concrete boxes are used in poured concrete construction
- They are installed on wooden or steel concrete forms, once the forms are removed the boxes and conduit are buried in concrete and the end is open to the room wall or ceiling, ready for wire pulling

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	K.O. PATTERN FIG #	RING DEPTH	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
				SIDE CONDUIT		
OCR-200	1/2" & 3/4" KO'S	1	2"	(4) 1/2" & (4) 3/4"	24.5 (401.4)	10
OCR-250		1	2-1/2"	(4) 1/2" & (4) 3/4"	30.8 (504.7)	10
OCR-300		1	3"	(4) 1/2" & (4) 3/4"	37.0 (606.3)	10
OCR-350		2	3-1/2"	(8) 1/2" & (8) 3/4"	43.0 (704.6)	20
OCR-400		2	4"	(8) 1/2" & (8) 3/4"	49.3 (807.8)	5
OCR-500		2	5"	(8) 1/2" & (8) 3/4"	61.5 (1007.8)	5
OCR-600		2	6"	(8) 1/2" & (8) 3/4"	74.0 (1212.6)	5
OCR-300341	3/4" & 1" KO'S	1	3"	(4) 3/4" & (4) 1"	37.0 (606.3)	10
OCR-350341		1	3-1/2"	(4) 3/4" & (4) 1"	43.0 (704.6)	5
OCR-400341		3	4"	(8) 3/4" & (8) 1"	49.3 (807.8)	5

PART #	DESCRIPTION	RECOMMENDED MAX LOAD RATINGS		KO PATTERN FIG#	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
		CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.		SIDE CONDUIT		
OCR-400FAN	1/2" & 3/4" KO'S, CEILING FAN/ LIGHT FIXTURE SUPPORT	35	75	2	49.3 (807.8)	(8) 1/2" & (8) 3/4"	5

CONCRETE RING COVERS



CBP-B



CBP



CBP-3/8



CBP-AP



CBP-APO



CBP-VT

FEATURES

- Keyhole mounting for easy installation and removal sold separately

APPLICATIONS

- Blank octagon concrete box covers are used to cover octagon concrete boxes when conduit knockouts are not needed

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS


- UL, cULus Listed

PART #	DESCRIPTION	KNOCKOUTS	MASTER QTY.
CBP-B	BLANK	---	50
CBP	WITH KO'S	(3) 1/2" & (2) 3/4"	50
CBP-3/8	3/8" FIXTURE STUD	(2) 1/2" & (2) 3/4"	50
CBP-AP*	OCT. BOX ADAPTER PLATE	OPEN	50
CBP-APO*	2-3/4" OR 3-1/2" ON CENTER HOLES	OPEN	50
CBP-VT*	PLENUM	(3) 1/2" & (2) 3/4"	50

*Not UL Listed

CONCRETE RING ASSEMBLIES WITH GASKETED COVER & INSTALLED CONNECTORS

3-1/2" & 4" DEPTHS - WITH CONDUIT KNOCKOUTS



OCA35075



OCA40050



OCA40075

FEATURES

- Extra long external mounting tabs allow easy installation by nailing or screwing the boxes to wooden or steel concrete forms
- Solid leak-proof housing
- Rubber plugs seal unused connector holes

APPLICATIONS

- Octagon concrete boxes are used in poured concrete construction
- They are installed on wooden or steel concrete forms, once the forms are removed the boxes and conduit are buried in concrete and the end is open to the room wall or ceiling, ready for wire pulling

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- From UL Listed components

PART #	DESCRIPTION	INSTALLED CONNECTORS	RING DEPTH	CUBIC INCHES (CM^3)	MASTER QTY.
OCA35075	GASKETED COVERS BOTH SIDES	(4) 3/4" SETSCREW	3-1/2"	43.0 (704.6)	10
OCA40050		(4) 1/2" SETSCREW	4"	49.3 (807.8)	10
OCA40075		(4) 3/4" SETSCREW	4"	49.3 (807.8)	10

4" SQUARE CONCRETE SLAB BOXES

3-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52181-1/2-SPKR

LISTED



52181-3/4-SPKR



52181-SPKR



52181-1-SPKR



52181-SPKRR



52181-3/4-SPKRR

FEATURES

- External tabs allow installer to nail/screw boxes to forms for stability during concrete pour
- Labor saving design eliminates need to install extension rings to accommodate deeper devices

APPLICATIONS

- Concrete slab boxes are a perfect choice for deep devices, or life safety appliances such as speakers, strobes, and horns

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52181-1/2-SPKR	RAISED GROUND & FRONT TABS	(8) 1/2"	---	50.0 (819.4)	10
52181-3/4-SPKR		(8) 3/4"		50.0 (819.4)	10
52181-SPKR		(4) 1/2" & (4) 3/4"		50.0 (819.4)	10
52181-1-SPKR		(8) 1"		50.0 (819.4)	10
52181-SPKRR	RAISED GROUND, FRONT TABS, RED *	(8) 3/4"		50.0 (819.4)	10
52181-3/4-SPKRR		(8) 3/4"		50.0 (819.4)	10

*UL Listed components

4" SQUARE PLENUM BOXES

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS, PLENUM



52151-3/4-VT



52151-SVT



52151-SVTSS

FEATURES

- Drawn construction with airtight knockouts and mounting/nail holes
- Cover mounting screws included with plenum cover
- 316 stainless steel is used on corrosive applications
- Painted red boxes are used for life safety wireway identification

APPLICATIONS

- Plenum boxes are used in air-plenum wall or ceiling surfaces to install lighting fixtures, switches, receptacles or other outlet devices
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Galvanized steel

CERTIFICATIONS

- UL Listed (From UL Listed components)

UL LISTED

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52151-3/4-VT	PLENUM, STANDARD	(8) 3/4"	(3) 1/2" & (2) 3/4"	21.0 (344.1)	50
52151-SVT	PLENUM, STANDARD	(8) 1/2" & (4) 3/4"	(3) 1/2" & (2) 3/4"	21.0 (344.1)	50
52151-SVTSS	PLENUM, 316 STAINLESS STEEL	(8) 1/2" & (4) 3/4"	(3) 1/2" & (2) 3/4"	21.0 (344.1)	50

4" SQUARE PLENUM BOXES

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS, PLENUM



52171-SBB



52171-3/4-VT



52171-3/4-1VT



52171-1-VT



52171-SVT



52171-SVTRED



52171-SVTSS

FEATURES

- Drawn construction with airtight knockouts and mounting/nail holes
- Cover mounting screws included with plenum cover
- 316 stainless steel is used in corrosive applications
- Painted red boxes are used for life safety wireway identification

APPLICATIONS

- Plenum boxes are used in air-plenum wall or ceiling surfaces to install lighting fixtures, switches, receptacles or other outlet devices
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52171-SBB	PLENUM, STANDARD, BLANK BOTTOM	(8) 1/2" & (4) 3/4"	---	30.3 (496.5)	25
52171-3/4-VT	PLENUM, STANDARD	(8) 3/4"	(3) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-3/4-1VT	PLENUM, STANDARD	(4) 3/4" & (4) 1"	(3) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-1-VT	PLENUM, STANDARD	(8) 1"	(3) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-SVT	PLENUM, STANDARD	(8) 1/2" & (4) 3/4"	(3) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-SVTRED	PLENUM, RED	(8) 1/2" & (4) 3/4"	(3) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-SVTSS	PLENUM, 316 STAINLESS STEEL	(8) 1/2" & (4) 3/4"	(3) 1/2" & (2) 3/4"	30.3 (496.5)	50

4" SQUARE PLENUM BOXES

3" DEEP - DRAWN WITH CONDUIT KNOCKOUTS, PLENUM



52181-SVT

LISTED

FEATURES
- Drawn construction with airtight knockouts and mounting/nail holes
- Cover mounting screws included with plenum cover

APPLICATIONS
- Plenum boxes are used in air-plenum wall or ceiling surfaces to install lighting fixtures, switches, receptacles or other outlet device
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52181-SVT	PLENUM, STANDARD	(8) 1/2" & (4) 3/4"	(3) 1/2"& (2) 3/4"	44.0 (721.1)	25

4" SQUARE PLENUM EXTENSION RINGS

1-1/2" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS PLENUM



53151-SVT



53151-SVTSS

LISTED

FEATURES
- Drawn construction with airtight knockouts
- Bottom mounting slots allow a quick installation onto existing boxes
- 53C1-VT Plenum Sealing Ring must be ordered separately

APPLICATIONS
- Plenum extension rings are used in air-plenum wall or ceiling surfaces to install lighting fixtures, switches, receptacles or other outlet devices
- Extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed
- 316 stainless steel is used in corrosive applications

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT		
53151-SVT	PLENUM, STANDARD	DRAWN	(8) 1/2" & (4) 3/4"	21.0 (344.1)	50
53151-SVTSS	PLENUM, 316 STAINLESS STEEL	DRAWN	(8) 1/2" & (4) 3/4"	21.0 (344.1)	50

4" SQUARE PLENUM EXTENSION RINGS

2-1/8" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS, PLENUM



53171-SVT



53171-SVTSS

UL LISTED

FEATURES

- Drawn construction with airtight knockouts
- Bottom mounting slots allow a quick installation onto existing boxes
- 53C1-VT Plenum Sealing Ring must be ordered separately

APPLICATIONS

- Plenum extension rings are used in air-plenum wall or ceiling surfaces to install lighting fixtures, switches, receptacles or other outlet devices
- Extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed
- 316 stainless steel is used in corrosive applications

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
53171-SVT	PLENUM, STANDARD	DRAWN	(8) 1/2" & (4) 3/4"	30.3 (496.5)	25
53171-SVTSS	PLENUM, 316 STAINLESS STEEL	DRAWN	(8) 1/2" & (4) 3/4"	30.3 (496.5)	25

4" SQUARE PLENUM FLAT COVERS

PLENUM



52C1-VT

UL LISTED c UL us LISTED



53C1-VT



52C6-VT-SS



52C1-VTRED

FEATURES

- Keyhole mounting holes for easy installation
- Pre-installed gasket on inside of cover
- Captive cover mounting screws
- 316 stainless steel is used in corrosive applications
- Painted red covers are used for life safety wireway identification

APPLICATIONS

- Plenum flat blank covers are used to enclose plenum box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL, cULus Listed (From UL Listed components)

PART #	DESCRIPTION	MASTER QTY.
52C1-VT	PLENUM, STANDARD, GASKETED WITH 8-32 CAPTIVE SCREWS	25
53C1-VT	DOUBLE GASKETED RING FOR MOUNT OF PLENUM EXTENSIONS TO PLENUM BOX	25
52C1-VTRED	PLENUM, RED, GASKETED WITH 8-32 CAPTIVE SCREWS	25
52C6-VT-SS	PLENUM, 316 STAINLESS STEEL, GASKETED 1/2 KO WITH 8-32 CAPTIVE SCREWS	50

4" SQUARE PLENUM SWIVEL FIXTURE HANGERS

20° MAX SWING FROM VERTICAL, PLENUM



SC-50-VTSS

UL LISTED c UL us LISTED

FEATURES
- Keyhole slots allow for fast installation
- 316 stainless steel is used in corrosive applications

APPLICATIONS
- Plenum swivel fixture hangers are used to hang commercial or industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/electronic devices from overhead ceiling installations
- Perfect for plenum commercial or industrial applications where the pipe stem or fixture might be subjected to motion or vibration in corrosive applications

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	FITS CONDUIT	MASTER QTY.
SC-50-VTSS	PLENUM, 316 STAINLESS STEEL, TRADITIONAL TYPE	1/2" OR 3/4"	25

4-11/16" SQUARE PLENUM BOXES

1-1/2" DEEP - DRAWN WITH CONDUIT KNOCKOUTS, PLENUM



72151-SVT

UL LISTED

FEATURES
- Drawn construction with airtight knockouts and mounting/nail holes
- Cover mounting screws included with plenum cover

APPLICATIONS
- Plenum boxes are used in air-plenum wall or ceiling surfaces to install lighting fixtures, switches, receptacles or other outlet device
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL
- Galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
72151-SVT	PLENUM, STANDARD, FLAT BOTTOM	(8) 1/2" & (4) 3/4"	(3) 1/2" & (2) 3/4"	29.5 (483.3)	25

4-11/16" SQUARE PLENUM BOXES

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS, PLENUM



72171-3/4-VT

UL LISTED



72171-3/4-1-VT



72171-1-VT



72171-SVT



72171-1-1/4VT



72171-SVTRED



72171-SVTSS

FEATURES

- Drawn construction with airtight knockouts and mounting/nail holes
- Cover mounting screws included with plenum cover

APPLICATIONS

- Plenum boxes are used in air-plenum wall or ceiling surfaces to install lighting fixtures, switches, receptacles or other outlet devices
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Galvanized steel or 316 stainless steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
72171-3/4-VT	PLENUM STANDARD, FLAT BOTTOM	(3) 1/2" & (2) 3/4"	(12) 3/4"	42.0 (688.2)	25
72171-3/4-1-VT	PLENUM STANDARD, FLAT BOTTOM	(3) 1/2" & (2) 3/4"	(6) 3/4" & (4) 1"	42.0 (688.2)	25
72171-1-VT	PLENUM STANDARD, FLAT BOTTOM	(3) 1/2" & (2) 3/4"	(8) 1"	42.0 (688.2)	25
72171-SVT	PLENUM STANDARD, FLAT BOTTOM	(3) 1/2" & (2) 3/4"	(8) 1/2" & (4) 3/4"	42.0 (688.2)	25
72171-1-1/4VT	PLENUM STANDARD, FLAT BOTTOM	(3) 1/2" & (2) 3/4"	(4) 1-1/4	42.0 (688.2)	25
72171-SVTRED	PLENUM, RED *	(3) 1/2" & (2) 3/4"	(8) 1/2" & (4) 3/4"	42.0 (688.2)	25
72171-SVTSS	PLENUM, 316 STAINLESS STEEL	(3) 1/2" & (2) 3/4"	(8) 1/2" & (4) 3/4"	42.0 (688.2)	25

*UL Listed components

4-11/16" SQUARE PLENUM EXTENSION RINGS

2-1/8" DEEP - DRAWN
WITH CONDUIT KNOCKOUTS, PLENUM



73171-SVT

UL LISTED

FEATURES
- Drawn construction with airtight knockouts
- Bottom mounting slots allow a quick installation onto existing boxes
- 73C1-VT Plenum Sealing Ring must be ordered separately

APPLICATIONS
- Plenum swivel fixture hangers are used to hang commercial or industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/electronic devices from overhead ceiling installations
- Perfect for plenum commercial or industrial applications where the pipe stem or fixture might be subjected to motion or vibration in corrosive applications

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT		
73171-SVT	PLENUM, STANDARD	DRAWN	(8) 1/2" & (4) 3/4"	43.0 (704.6)	25

4-11/16" SQUARE PLENUM FLAT COVERS

PLENUM



72C1-VT

UL LISTED



73C1-VT



72C1-VTRED



72C6-VTSS

FEATURES
- Keyhole mounting holes for easy installation
- Pre-installed gasket on inside of cover
- Captive cover mounting screws
- 316 stainless steel is used in corrosive applications
- Painted red covers are used for life safety wireway identification

APPLICATIONS
- Plenum flat blank covers are used to enclose plenum box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	MASTER QTY.
72C1-VT	PLENUM, STANDARD, GASKETED WITH 8-32 CAPTIVE SCREWS	25
73C1-VT	DOUBLE GASKETED RING FOR MOUNT OF PLENUM EXTENSIONS TO PLENUM BOX	25
72C1-VTRED	PLENUM, RED, GASKETED WITH 8-32 CAPTIVE SCREWS*	25
72C6-VTSS	PLENUM, 316 STAINLESS STEEL , 1/2" KO IN CENTER	50

*UL Listed components

4-11/16" SQUARE PLENUM SWIVEL FIXTURE HANGERS

20°MAX SWING FROM VERTICAL, PLENUM



SC-507511B-VTSS

UL LISTED c UL us LISTED

FEATURES
- Keyhole slots allow for fast installation
- 316 stainless steel is used in corrosive applications separately

APPLICATIONS
- Plenum swivel fixture hangers are used to hang commercial or industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/electronic devices from overhead ceiling installations
- Perfect for plenum commercial or industrial applications where the pipe stem or fixture might be subjected to motion or vibration

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	FITS CONDUIT)	MASTER QTY.
SC-507511B-VTSS	PLENUM, 316 STAINLESS STEEL, TRADITIONAL TYPE	1/2" OR 3/4"	10

4" ROUND PLENUM SWIVEL FIXTURE HANGERS

EARS 3-1/2" ON CENTER, PLENUM



SC-50R-VT



SC-50R-VTSS

UL LISTED c UL us LISTED

FEATURES
- Keyhole slots allow for fast installation
- 316 stainless steel is used in corrosive applications separately

APPLICATIONS
- Plenum swivel fixture hangers are used to hang commercial or industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/electronic devices from overhead ceiling installations
- Perfect for plenum commercial or industrial applications where the pipe stem or fixture might be subjected to motion or vibration

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	FITS CONDUIT)	MASTER QTY.
SC-50R-VT	PLENUM, STANDARD, GASKETED, TRADITIONAL TYPE	1/2" OR 3/4"	25
SC-50R-VTSS	PLENUM, 316 STAINLESS STEEL, TRADITIONAL TYPE	1/2" OR 3/4"	10

4" OCTAGON PLENUM BOXES

1-1/2" DEEP - WITH CONDUIT KNOCKOUTS
EARS 3-1/2" ON CENTER, PLENUM



54151-VT



54151-SVTSS

UL LISTED

FEATURES
- Drawn construction with airtight knockouts and mounting/nail holes
- Cover mounting screws included with plenum cover
- 316 stainless steel is used on corrosive applications

APPLICATIONS
- Plenum boxes are used in air-plenum wall or ceiling surfaces to install lighting fixtures, switches, receptacles or other outlet devices
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
54151-VT	PLENUM, STANDARD	(4) 1/2"	(5) 1/2"	15.5 (254.0)	50
54151-SVTSS	PLENUM, 316 STAINLESS STEEL	(2) 1/2" & (2) 3/4"	(3) 1/2" & (2) 3/4"	15.5 (254.0)	50

4" OCTAGON PLENUM EXTENSION RINGS

1-1/2" DEEP - WITH CONDUIT KNOCKOUTS
EARS 3-1/2" ON CENTER, PLENUM



55151-VT

UL LISTED

FEATURES
- Drawn construction with airtight knockouts and mounting/nail holes
- Cover mounting screws included with plenum cover
- 316 stainless steel is used on corrosive applications


APPLICATIONS
- Plenum octagon extension rings are added to plenum junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS	CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT		
55151-VT	PLENUM	(2) 1/2" & (2) 3/4"	15.5 (254.0)	50

4" OCTAGON PLENUM FLAT COVERS



54C1-VT



54C6-VTSS

UL LISTED

c UL us LISTED

FEATURES
- Keyhole mounting holes for easy installation
- Pre-installed gasket on inside of cover
- Captive cover mounting screws

APPLICATIONS
- Plenum flat blank covers are used to enclose plenum box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL
- Galvanized steel or 316 stainless steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
54C1-VT	PLENUM, STANDARD, WITH GASKET	25
54C6-VTSS	PLENUM, 316 STAINLESS STEEL , 1/2" CENTER KO	50

4" SQUARE LIFE SAFETY BOXES

1-1/2" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS



52151-SVTRED



52151-RED



52151-3/4RED

2 HR FIRE RATED

FEATURES
- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs

APPLICATIONS
- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL
- Powder coated galvanized steel

PART #	DESCRIPTION	BOX TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52151-SVTRED	PLENUM, RED *	DRAWN	(8) 1/2" & (4) 3/4"	(3) 1/2" & (2) 3/4"	21.0 (344.1)	50
52151-RED	RAISED GROUND, ECCENTRIC KO'S, RED	WELDED	(6) 1/2" & (6) 1/2" – 3/4"	(3) 1/2" & (2) 3/4"	21.0 (344.1)	50
52151-3/4RED	RAISED GROUND, RED *	WELDED	(8) 3/4"	(3) 1/2" & (2) 3/4"	21.0 (344.1)	50

4" SQUARE LIFE SAFETY BOXES

2-1/8" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS



52171-SVTRED

LISTED

2 HR FIRE RATED



52171-0WRED



52171-RED



52151-SVTRED



52171-1RED

FEATURES

- Boxes are painted red to easily distinguish them as fire alarm and life safety circuits

APPLICATIONS

- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions runs are split in two or more directions

STANDARD MATERIAL

- Powder coated galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	BOX TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52171-SVTRED	PLENUM, RED	DRAWN	(8) 1/2" & (4) 3/4"	(3) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-RED	RAISED GROUND, RED	WELDED	(6) 1/2" & (6) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	24
52171-0WRED	OLD WORK WITH EARS & CLIPS, RED*	WELDED	(6) 1/2" & (6) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-3/4RED	RAISED GROUND, RED	WELDED	(8) 3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25
52171-1RED	RAISED GROUND, RED*	WELDED	(8) 1"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	25

*UL Listed components

2-1/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52171-FRED

LISTED

2 HR FIRE RATED

FEATURES

- Boxes are painted red to easily distinguish them as fire alarm and life safety circuits

APPLICATIONS

- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Powder coated galvanized steel

CERTIFICATIONS

- UL Listed (UL Listed components)

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52171-FRED	FLAT, STUD SIDE MOUNT, RED	F	(4) 1/2" & (5) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	30.3 (496.5)	25

4" SQUARE LIFE SAFETY BOXES

3-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52181-RED



52181-OWRED

LISTED

2 HR FIRE RATED

FEATURES

- Boxes are painted red to easily distinguish them as fire alarm and life safety circuits

APPLICATIONS

- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Powder coated galvanized steel

CERTIFICATIONS


- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52181-RED	RAISED GROUND, CONCENTRIC KO'S, RED	(4) 1/2" – 3/4" & (2) 3/4" & (2) 1"	(2) 1/2" & (2) 3/4"	50.0 (918.4)	10
52181-OWRED	OLD WORK WITH EARS & CLIPS, RED*	(8) 1/2" & (4) 1/2" – 3/4"	(3) 1/2" & (2) 1/2" – 3/4"	50.0 (918.4)	10

*UL Listed components

4" SQUARE BRACKETED LIFE SAFETY BOXES

3-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS

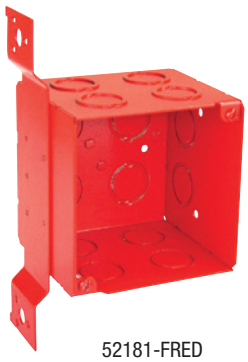

52181-FRED

LISTED

2 HR FIRE RATED

FEATURES

- Boxes are painted red to easily distinguish them as fire alarm and life safety circuits

APPLICATIONS

- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Powder coated galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52181-FRED	FLAT, STUD SIDE MOUNT, CONCENTRIC KO'S, RED	F	(5) 1/2" & (5) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	30.3 (496.5)	10

4" SQUARE LIFE SAFETY BOXES

4" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52191-RED



52191-OWRED

LISTED

2 HR FIRE RATED

FEATURES

- Boxes are painted red to easily distinguish them as fire alarm and life safety circuits

APPLICATIONS

- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Powder coated galvanized steel

CERTIFICATIONS


- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
52191-RED	RAISED GROUND, CONCENTRIC KO'S, RED	(4) 1/2" – 3/4" & (2) 3/4" & (2) 1"	(2) 1/2" & (2) 3/4"	56.0 (917.7)	10
52191-OWRED	OLD WORK WITH EARS & CLIPS, CONCENTRIC KO'S, RED*	(6) 1/2" & (6) 1/2" – 3/4"	(2) 1/2", & (2) 3/4"	56.0 (917.7)	10

*UL Listed components

4" SQUARE BRACKETED LIFE SAFETY BOXES

4" DEEP - WELDED WITH CONDUIT KNOCKOUTS



52191-FRED

LISTED

2 HR FIRE RATED

FEATURES

- Boxes are painted red to easily distinguish them as fire alarm and life safety circuits

APPLICATIONS

- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Powder coated galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
52191-FRED	FLAT, STUD SIDE MOUNT, CONCENTRIC KO'S, RED	F	(5) 1/2" & (5) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	56.0 (917.7)	10

4" SQUARE LIFE SAFETY EXTENSION RINGS

1-1/2" DEEP - WELDED WITH CONDUIT KNOCKOUTS



53151-RED

LISTED

FEATURES
- Extension rings are painted red to distinguish them as fire alarm circuits

APPLICATIONS
- Red extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent having to remove old conduit boxes and wiring from circuits when additional wiring is needed


STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
53151-RED	EXTENSION RING, CONCENTRIC KO'S, RED	WELDED	(6) 1/2" & (6) 1/2" – 3/4"	21.0 (344.1)	50

*UL Listed components

2-1/8" DEEP - DRAWN OR WELDED WITH CONDUIT KNOCKOUTS



53171-RED

LISTED

FEATURES
- Extension rings are painted red to distinguish them as fire alarm circuits

APPLICATIONS
- Red extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent having to remove old conduit boxes and wiring from circuits when additional wiring is needed

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
53171-RED	EXTENSION RING, CONCENTRIC KO'S, RED	WELDED	6) 1/2" & (6) 1/2" – 3/4"	30.3 (496.5)	25

4" SQUARE LIFE SAFETY FLAT COVERS



52C1-RED



52C1-VTRED

FEATURES
- Covers are painted red to make them easily detectable as fire alarm or life safety circuits

APPLICATIONS
- Red flat blank covers are used to cover fire alarm box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- UL, cULus Listed

UL LISTED c UL US LISTED

PART #	DESCRIPTION	MASTER QTY.
52C1-RED	BLANK, RED	50
52C1-VTRED	PLENUM GASKETED WITH 8-32 CAPTIVE SCREWS, RED	25

4-11/16" SQUARE LIFE SAFETY BOXES

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



72171-RED

UL LISTED



72171-SVTRED



72171-3/4RED



72171-1RED

FEATURES
- Boxes are painted red to easily distinguish them as fire alarm and life safety circuits

APPLICATIONS
- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- UL Listed (From UL Listed components)

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
72171-RED	RAISED GROUND, CONCENTRIC KO'S, RED	(6) 1/2" & (6) 1/2" – 3/4"	(2) 1/2" & (2) 3/4"	42.0 (688.2)	25
72171-SVTRED	PLENUM, RED	(8) 1/2" & (4) 3/4"	(3) 1/2" & (2) 3/4"	42.0 (688.2)	25
72171-3/4RED	FLAT BOTTOM, RED	(12) 3/4"	(2) 1/2" & (2) 3/4"	42.0 (688.2)	25
72171-1RED	RAISED GROUND, RED	(12) 1"	(2) 1/2" & (2) 3/4"	42.0 (688.2)	25

4-11/16" SQUARE BOXES FOR FIRE ALARMS

2-1/8" DEEP - WELDED WITH CONDUIT KNOCKOUTS



82171-RD



82171-WH

LISTED

FEATURES

- Boxes are painted red to easily distinguish them as fire alarm and life safety circuits

APPLICATIONS

- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Powder coated galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
82171-RD	FLAT BOTTOM, 4 MOUNTING EARS, RED	(10) 1/2" – 3/4" & (2) 1"	(3) 1/2" & (2) 3/4"	42.0 (688.2)	25
82171-WH	FLAT BOTTOM, 4 MOUNTING EARS, WHITE	(10) 1/2" – 3/4" & (2) 1"	(3) 1/2" & (2) 3/4"	42.0 (688.2)	25

4-11/16" SQUARE BOXES FOR DATA CABLE

3" DEEP - WELDED WITH CONDUIT KNOCKOUTS



72181-DTARED

LISTED

FEATURES

- Boxes are painted red to easily distinguish them as fire alarm and life safety circuits

APPLICATIONS

- Red junction boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices for fire alarm and life safety circuit runs
- Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions

STANDARD MATERIAL

- Powder coated galvanized steel

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	BRACKET TYPE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	BOTTOM CONDUIT		
72181-DTARED	RAISED GROUND, RED	---	(2) 1/2" – 3/4" & (2) 1" – 1-1/4" & (2) 1", 1–1/4 - 1–1/2" & 2"	(2) 1/2" - CONCENTRIC (2) 1/4" & 1"	66.0 (1081.6)	10

4-11/16" SQUARE LIFE SAFETY EXTENSION RINGS

2-1/8" DEEP - DRAWN WITH CONDUIT KNOCKOUTS



73171-RED

UL LISTED

FEATURES
- Extension rings are painted red to distinguish them as fire alarm circuits

APPLICATIONS
- Red extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent having to remove old conduit boxes and wiring from circuits when additional wiring is needed

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	RING TYPE	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
73171-RED	STANDARD EXTENSION RING, CONCENTRIC KO'S, RED	DRAWN	((6) 1/2" & (6) 1/2" – 3/4"	43.0 (704.6)	25

4-11/16" SQUARE LIFE SAFETY FLAT COVERS



72C1-RED



72C1-VTRED

UL LISTED

c UL us LISTED

FEATURES
- Covers are painted red to make them easily detectable as fire alarm or life safety circuits

APPLICATIONS
- Red flat blank covers are used to cover fire alarm box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- UL, cULus Listed

PART #	DESCRIPTION	MASTER QTY.
72C1-RED	BLANK, RED	50
72C1-VTRED	PLENUM GASKETED WITH 8-32 CAPTIVE SCREWS, RED*	25

*UL Listed components

4" OCTAGON LIFE SAFETY BOXES

1-1/2" DEEP - WITH CONDUIT KNOCKOUTS, EARS 3-1/2" ON CENTER



54151-RED

UL LISTED

FEATURES
- Boxes are painted red to make them easily detectable as fire alarm or life safety circuits

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
54151-RED	FLAT BOTTOM, RED	(2) 1/2" & (2) 3/4"	(3) 1/2" & (2) 3/4"	15.5 (254.0)	50

2-1/8" DEEP - WITH CONDUIT KNOCKOUTS, EARS 3-1/2" ON CENTER



54171-RED

UL LISTED

FEATURES
- Boxes are painted red to make them easily detectable as fire alarm or life safety circuits

APPLICATIONS
- Octagon boxes are used to install ceiling and wall lighting fixtures, or convenience outlets and devices

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- UL Listed

PART #	DESCRIPTION	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
		SIDE CONDUIT	BOTTOM CONDUIT		
54171-RED	FLAT, CONCENTRIC KO'S, RED	(2) 1/2" & (2) 1/2" – 3/4"	(3) 1/2" & (2) 3/4"	21.5 (352.3)	25

4" OCTAGON LIFE SAFETY EXTENSION RINGS

1-1/2" DEEP - WITH CONDUIT KNOCKOUTS, EARS 3-1/2" ON CENTER



55151-RED

FEATURES
- Extension rings are painted red to distinguish them as fire alarm circuits

APPLICATIONS
- Octagon extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- Uses UL Listed components

PART #	DESCRIPTION	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
55151-RED	STANDARD EXTENSION RING, RED	(6) 1/2" & (2) 3/4"	15.5 (254.0)	50

2-1/8" DEEP - WITH CONDUIT KNOCKOUTS EARS 3-1/2" ON CENTER



55171-RED

FEATURES
- Extension rings are painted red to distinguish them as fire alarm circuits

APPLICATIONS
- Octagon extension rings are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire
- Extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional capacity is needed

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- Uses UL Listed components

PART #	DESCRIPTION	KNOCKOUTS SIDE CONDUIT	CUBIC INCHES (CM^3)	MASTER QTY.
55171-RED	STANDARD EXTENSION RING, RED	(2) 1/2" & (2) 3/4"	21.5 (352.3)	25

4" OCTAGON LIFE SAFETY FLAT COVERS



54C1-RED

FEATURES
- Covers are painted red to make them easily detectable as fire alarm or life safety circuits

APPLICATIONS
- Red flat blank covers are used to cover fire alarm box wiring and provide a means for access when future conduit runs are required

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- From UL Listed components

PART #	DESCRIPTION	MASTER QTY.
54C1-RED	BLANK, NO KO, RED	50

4" ROUND LIFE SAFETY RING

FIXTURE RINGS, FIXTURE EARS 2-3/4" ON CENTER



54C3-RED

FEATURES
- Covers are painted red to make them easily detectable as fire alarm or life safety circuits

APPLICATIONS
- 4" round raised fixture rings are used to mount a light fixture in a ceiling or on wall

STANDARD MATERIAL
- Powder coated galvanized steel

CERTIFICATIONS
- From UL Listed components

PART #	DESCRIPTION	RAISED	CUBIC INCHES (CM^3)	MASTER QTY.
54C3-RED	FOR DRYWALL, RED	1/2"	3.3 (54.1)	25

FIRE STOP CAULK



LISTED

FSCLK10


PART #	DESCRIPTION	MASTER QTY.
FSCLK10	10.3 OZ. CAULK TUBE	1

FEATURES
- 10.3 oz. caulk tube

APPLICATIONS
- Fire stop caulk is a low cost noncombustible material that is used to fill the space around wires, pipes, ducts and other mechanical items penetrating steel and wood framed residential construction
- Fire stop caulk fulfills fire blocking requirements for resuming the integrity of non-rated penetrations through ceiling and floor openings

CERTIFICATIONS
- Uses UL Listed

FIRE STOP PUTTY PAD



LISTED

FSPAD

PART #	DESCRIPTION	MASTER QTY.
FSPAD	7" X 7" X 1/8"	1

FEATURES
- In fire conditions, the pads expand to form and intumescent char that encloses the electrical box and seals off any openings that may allow the spread of flame, smoke, and toxic gases
- Putty Pad is tested to ASTM-E90, has a STC Rating of 49, and a intumescent activation of 220° Fahrenheit

APPLICATIONS
- Fire stop putty pads are designed to protect electrical outlet boxes
- Pads are applied to the backside of electrical boxes to maintain the integrity of 1 & 2 hour fire rated gypsum walls
- Applications include in multi-family and commercial construction

CERTIFICATIONS
- UL Listed

FIRE STOP EXPANSION FOAM



LISTED

FSFOM

PART #	DESCRIPTION	MASTER QTY.
FSFOM	12 OZ. POLYURETHANE, FIREBLOCKING FOAM SEALANT, EASY I.D. ORANGE COLOR, EVALUATED PER UL ER 38112-01, TYPE V RESIDENTIAL FIREBLOCK. FIVE MINS. TACK-FREE, ONE HOUR TO TRIM. FULL CURE 12 - 24 HOURS	1

FEATURES
- Type V, one and two-family residential construction
- Foam has been tested [er ASTM-E814 (Modified) as an alternative fire blocking material and meets the International Residential Code standards for fire blocking penetrations in Type V Residential Construction
- Air Freight Shipping May be Restricted

APPLICATIONS
- Fire blocking foam is a one-component, poly urethane based insulating foam sealant used to fill the annular space around vents, pipes, ducts, cables, and wires at ceiling and floor level in non-rated

CERTIFICATIONS
- UL Listed

FAR SIDE BOX SUPPORTS

SNAP ON



ABS

PART #	DESCRIPTION	MASTER QTY.
ABS	FOR 4" WALL CAVITY, SNAP ON TO BOX EDGE	100

FEATURES
- Far side box support brackets are designed to hold boxes rigid in metal stud walls when devices are installed
- Snap-on design for easy installation

APPLICATIONS
- Far side box support brackets are used for 1-1/2" and 2-1/8" deep 4" and 4-11/16" deep boxes
- Supports are also used to keep boxes from twisting back into wall cavities during drywall construction

STANDARD MATERIAL
- Galvanized steel

GROUND SCREWS

GREEN



GS



GSST

PART #	THREAD SIZE	SCREW LENGTH	MATERIAL	MASTER QTY.
GS	10-32	3/8"	GREEN PASSIVATED	100
GSST*	10-32	3/8"	GREEN PASSIVATED	100

*Self-Tapping, Tri-Drive Hex Washer Head

FEATURES
- The head on the grounding screws is compatible with Hex, Phillips, slotted and #2 Robertson drive styles
- Hole-finding designed screw tip

APPLICATIONS
- Southwire combination grounding screws are used in electrical boxes and on electrical devices for connecting ground conductors

STANDARD MATERIAL
- Steel

GROUND WIRE BOX CLIP

GREEN



GC

PART #	DESCRIPTION	LENGTH	MASTER QTY.
GC	SNAPS ON TO BOX EDGE	1/4"	100

FEATURES
- Quick-install, snap on design secure wire to box

APPLICATIONS
- 1/4" grounding clips are used on #14 and 16 solid wires to provide a safe secure bonding to box


STANDARD MATERIAL
- Steel

GREEN PIGTAIL

WITH SLOTTED HEX GROUND SCREW



50



FEATURES
- Plated green to ensure proper identification

APPLICATIONS
- Use to ground receptacles to steel boxes

STANDARD MATERIAL
- Copper wire/zinc plated ground screw

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
50	7" 14GA. SOLID GREEN	100	1000	23	7"	10-32 x 3/8"
49	7-1/2" 12GA. SOLID GREEN	100	1000	24	7-1/2"	10-32 x 3/8"
49L	10" 12GA. SOLID GREEN	100	1000	32	10"	10-32 x 3/8"
49XL	7" 12GA. SOLID GREEN	100	800	28	12"	10-32 x 3/8"
50A	7-1/2" 10GA. SOLID GREEN	100	100	30	7-1/2"	10-32 x 3/8"

GREEN GROUNDING PIGTAILS



PTST14GN



PTST12GN-NGS

FEATURES
- 12 AWG & 14 AWG green grounding pigtails

APPLICATIONS
- Southwire Grounding Pigtails feature THHN lead wires that are convenient for grounding applications in electrical boxes

PART #	WIRE GAUGE	LENGTH	COLOR	ATTACHMENT TYPE	INNER QTY.	MASTER QTY.
PTST14GN	14 AWG STR	8"	GREEN	FLANGED SPADE TERMINAL & CAPTIVE 10-32 GREEN SCREW	---	100
PTST12GN-NGS	12 AWG STR	8"	GREEN	FLANGED SPADE TERMINAL & PRESTRIPPED 5/8"	---	100
PTST12GN	12 AWG STR	8"	GREEN	FLANGED SPADE TERMINAL & CAPTIVE 10-32 GREEN SCREW	---	100
PTSO12GN-S	12 AWG SOL	8"	GREEN	STRIPPED 5/8" ON BOTH ENDS	---	100


POWER PIGTAIL LEADS WITH STRIP AND STRIP TERMINAL



PTSO14RD



PTSO14BU



PTSO14BK



PTSO14WH



PTSO14YE

FEATURES

- 8" solid power pigtail leads
  *Both Ends Prestripped 5/8"

APPLICATIONS

- Southwire Power Pigtails feature THHN lead wires that are convenient for grounding applications in electrical boxes

PART #	WIRE GAUGE	LENGTH	COLOR	MASTER QTY.
PTSO14BK	14 AWG SOL	8"	BLACK	100
PTSO14BU	14 AWG SOL	8"	BLUE	100
PTSO14RD	14 AWG SOL	8"	RED	100
PTSO14WH	14 AWG SOL	8"	WHITE	100
PTSO14YE	14 AWG SOL	8"	YELLOW	100
PTSO12BK	12 AWG SOL	8"	BLACK	100
PTSO12BU	12 AWG SOL	8"	BLUE	100
PTSO12RD	12 AWG SOL	8"	RED	100
PTSO12WH	12 AWG SOL	8"	WHITE	100
PTSO12YE	12 AWG SOL	8"	YELLOW	100

POWER PIGTAIL LEADS WITH FORK TERMINAL



PTST14BK

FEATURES

- 8" stranded power pigtail leads
  *Includes flanged spade terminal and prestripped 5/8"

APPLICATIONS

- Southwire Grounding Pigtails feature THHN lead wires that are convenient for grounding applications

PART #	WIRE GAUGE	LENGTH	COLOR	MASTER QTY.
PTST14BK	14 AWG STR	8"	BLACK	100
PTST14BU	14 AWG STR	8"	BLUE	100
PTST14RD	14 AWG STR	8"	RED	100
PTST14WH	14 AWG STR	8"	WHITE	100
PTST14YE	14 AWG STR	8"	YELLOW	100
PTST12BK	12 AWG STR	8"	BLACK	100
PTST12BU	12 AWG STR	8"	BLUE	100
PTST12RD	12 AWG STR	8"	RED	100
PTST12WH	12 AWG STR	8"	WHITE	100
PTST12YE	12 AWG STR	8"	YELLOW	100

EMT BOX SPACER, FOR WALL BRACKETS

STEEL



BB-1/2-1

UL LISTED

FEATURES
- These spacers position boxes on bracket to correct distance
- Lock nuts included

APPLICATIONS
- Use specially in applications where multi-box, wall brackets are installed between studs

STANDARD MATERIAL
- Steel zinc plated

CERTIFICATIONS
- UL Listed

PART #	BOX KNOCKOUT SIZE	MASTER QTY.
BB-1/2-1	1/2"	100
BB-3/4-1*	3/4"	50
BB-1-1*	1"	50

*Not UL Listed

EMT BOX SPACER, FOR 2" GAP SPACING

STEEL



BB-1/2-2

UL LISTED

FEATURES
- Can be used anywhere 2" spacing between boxes is needed - back to back, side to side, top to bottom
- Lock nuts included

APPLICATIONS
- Use where additional spacing is needed between boxes

STANDARD MATERIAL
- Steel zinc plated

CERTIFICATIONS
- UL Listed

PART #	BOX KNOCKOUT SIZE	MASTER QTY.
BB-1/2-2	1/2"	50

ADJUST-IT™ BOX-TO-BOX CONNECTOR

STEEL



MAN200S



MAN200L

UL LISTED

FEATURES
- Set screws allow for adjustable length
- Includes lock nuts for securing to box or panell

APPLICATIONS
- Provides an adjustable connection between two panels

STANDARD MATERIAL
- Steel zinc plated

CERTIFICATIONS
- UL Listed


PART #	TRADE SIZE	ADJUSTMENT	MASTER QTY.
MAN200S	2"	5" TO 7"	6
MAN200L	2"	7.5" TO 12"	6

BOX SPACING CONNECTOR

WITH TWIN LOCKOUTS



141



FEATURES
- Back to back connector eliminates need for additional conduit runsl

APPLICATIONS
- Join j-boxes back to back in open wall spaces
- For use in a short raceway to connect j-boxes through conduit knockout openings

STANDARD MATERIAL
- Zinc die cast


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B
141	1/2"	50	500	40	1.12"	.40"
141A	3/4"	25	250	24	1.12"	.95"

NAIL PROTECTION PLATE

HAMMER-ON WITH WOOD SPIKES - 16 GAUGE STEEL



188



FEATURES
- 16-gauge thickness
- Hammer-on installation
- Spiked ends for wood studs
- Clip tabs for metal studs

APPLICATIONS
- Use to protect wire and cable from nails or screws in wood stud construction
- Mounts on outside of the stud face

MATERIAL/FINISH
- Steel



SP-3



43-100



PART #	STUD MATERIAL	ATTACHMENT	PLATE SIZE	A	B	C	BOX QTY.
SP-3	WOOD	SPIKE	1-1/2" x 2-1/2"	2.50"	1.50"	.0625"	200
187	WOOD	SPIKE	1-1/2" x 6" x 1/16"	5"	1.50"	.0625"	100
187A	WOOD	SPIKE	3-1/2" x 6" x 1/16"	6"	3.50"	.0625"	50
188	WOOD	SPIKE	1-1/2" x 5" x 1/16"	6"	1.50"	.0625"	100
189B	WOOD	SPIKE	1-1/2" x 2-1/2" x 1/16"	2.50"	1.50"	.0625"	50
43-50	WOOD	SPIKE	1-1/2" x 2-1/2"	2.50"	1.50"	.0625"	250
43-100	WOOD	SPIKE	1-1/2" x 2-1/2"	2.50"	1.50"	.0625"	100
43-5P	WOOD	SPIKE	1-1/2" x 2-1/2" (PAIL PACK)	2.50"	1.50"	.0625"	500

ROMEX™ BRAND SMARTSHIELD™ NAIL GUARD

STEEL



MNG100

PART #	DESCRIPTION	INNER QTY.	MASTER QTY.
MNG5B	1" TRADE SIZE HOLE IN STUD (5 PCS. PER 1 BAG)	1	20
MNG100	1" TRADE SIZE HOLE IN STUD (100 PCS) CONTRACTOR PACK	1	---

FEATURES
- Faster and easier to install vs. traditional nail plates
- Eliminated drywall bulge
- Won't bend during installation
- Can be installed prior to of after cable pull

APPLICATIONS
- Use to protect wire or cable from nails and screws in wood stud construction. Romex™ Brand SmartShield™ Nail Guard installs inside wood stud vs. outside of wood stud face

STANDARD MATERIAL
- Galvanized steel

NAIL PROTECTION PLATE

PEEL & STICK ADHESIVE - 16 GAUGE STEEL



SP-3-MS



SP-6-MS

PART #	SIZE (LENGTH X WIDTH)	MASTER QTY.
SP-3-MS	3" X 1-1/2"	100
SP-6-MS	6" X 1-1/2"	50

FEATURES
- Peel and stick adhesive for secure installation to face of metal stud

APPLICATIONS
- Use to protect wire and cable from nails or screws in metal stud construction
- Mounts on outside of metal stud face

STANDARD MATERIAL
- Galvanized steel

SCREW-ON - 16 GAUGE STEEL



SP-9



SP-12



SP-18



SP-24

PART #	SIZE (LENGTH X WIDTH)	MASTER QTY.
SP-9	9" X 1-1/2"	50
SP-12	12" X 1-1/2"	50
SP-18	18" X 1-1/2"	50
SP-24	24" X 1-1/2"	50

FEATURES
- Screw holes to secure plate (mounting screws not included)

APPLICATIONS
- Use to protect wire and cable from nails or screws in wood or metal stud construction
- Mounts on outside of stud face surface

STANDARD MATERIAL
- Galvanized steel

NAIL PROTECTION PLATE

EXTRA LARGE, SCREW-ON - 16 GAUGE STEEL



SP-33

FEATURES

- Screw holes to secure plate (mounting screws not included)

APPLICATIONS

- Use to protect wire and cable from nails or screws in wood or metal stud construction
- Mounts to surface

STANDARD MATERIAL

- Galvanized steel



SP-36



SP-39



SP-312



SP-318



SP-324



SP-58



SP-512



SP-518



SP-524

PART #	SIZE (LENGTH X WIDTH)	MASTER QTY.
SP-33	3" x 3"	50
SP-36	6" x 3"	50
SP-39	9" x 3"	50
SP-312	12" x 3"	50
SP-318	18" x 3"	50
SP-324	24" x 3"	50
SP-58	8" x 5"	50
SP-512	12" x 5"	50
SP-518	18" x 5"	50
SP-524	24" x 5"	50

OLD BOX EAR CONVERSION CLIPS



EC

PART #	DESCRIPTION	MASTER QTY.
EC	EACH CLIP HAS 6-32 & 8/32 THREADED HOLES, WITH SCREWS	100 PAIRS

FEATURES
- 6-32 and 8-32 threaded holes for each mounting to box and cover to box
- EC clips eliminate the need to tear out old boxes, rewire, pipe and install new devices

APPLICATIONS
- Old box ear tab conversion clips mount on old style junction boxes and extend the ear tabs out in seconds to convert the box to accept all standard styles of 4" covers and plaster rings

STANDARD MATERIAL
- Galvanized steel

DEVICE PROTECTOR SHIELD

GANGABLE, FOR STEEL DEVICE RINGS



WPPU

PART #	DESCRIPTION	MASTER QTY.
WPPU	FITS OVER PREINSTALLED TOGGLE, DUPLEX, DECORA, OR GFCI	50

FEATURES
- Uses existing device screw to install
- Fits over/protects toggle, duplex, decor, and GFCI devices
- Gangable design for multiple devices
- Reusable

APPLICATIONS
- Protection plate protect wires and single device. Installs on mud ring to protect from drywall routers, paint, plaster, dust and other debris

STANDARD MATERIAL
- Galvanized steel

WIRE PROTECTOR SHIELD

SNAP-IN, FOR STEEL SINGLE DEVICE RINGS - GALVANIZED STEEL



WPP1

PART #	DESCRIPTION	MASTER QTY.
WPP1	FITS 1-GANG PLASTER RINGS	50


FEATURES
- Snap-in installation
- Reusable

APPLICATIONS
- Protection plate protect wires in single device mud ring installed boxes from drywall routers, paint, plaster, dust and other debris

STANDARD MATERIAL
- Galvanized steel

WIRE PROTECTOR SHIELD

SCREW-ON, FOR STEEL TWO DEVICE RINGS - GALVANIZED STEEL



WPP2G

FEATURES
- Snap-in installation
- Reusable

APPLICATIONS
- Protection plate protect wires in single device mud ring installed boxes from drywall routers, paint, plaster, dust and other debris

STANDARD MATERIAL
- Galvanized steel

PART #	DESCRIPTION	MASTER QTY.
WPP2G	FITS 2-GANG STEEL DEVICE RINGS	50

KNOCKOUT SEALS

3 PIECE - GALVANIZED STEEL



KOS-50

FEATURES
- Pre–assembled screw and backer bar slides on open knockout holes without removing box devices or covers

APPLICATIONS
- Knockout seals are inserted in discontinued, open box or enclosure knockouts to protect exposed wires

STANDARD MATERIAL
- Galvanized Steel

CERTIFICATIONS
- UL Listed (2-1/2" - 6" not UL Listed)

PART #	BOX KNOCKOUT SIZE	MASTER QTY.
KOS-50	1/2"	50
KOS-75	3/4"	50
KOS-100	1"	50
KOS-125	1-1/4"	10
KOS-150	1-1/2"	10
KOS-200	2"	10
KOS-250 *	2-1/2"	10
KOS-300 *	3"	10
KOS-350 *	3-1/2"	10
KOS-400 *	4"	10
KOS-500 *	5"	10
KOS-600 *	6"	10


*Not UL Listed

KNOCKOUT SEALS

SNAP-IN - GALAVANIZED STEEL



KOS-50



FEATURES

- Snap-in design for easy installation
- Design allows to close and secure open knockout holes without removing box devices or covers

APPLICATIONS

- One-piece snap in style knockout seals are inserted in discontinued, open box knockouts to protect exposed wires
- Seals can be used in standard, air tight or dust tight applications

STANDARD MATERIAL

- Galvanized Steel

PART #	SIZE	INNER QTY.	MASTER QTY	WEIGHT/CASE (LBS.)	A	B
K050	1/2"	100	1000	10	1.07"	.37"
K051	3/4"	100	1000	20	1.24"	.31"
K052	1"	50	500	9	1.48"	.34"
K053	1-1/4"	50	500	10	1.80"	.31"
K054	1-1/2"	50	500	20	2.22"	.37"
K055	2"	10	100	5	2.68"	.36"

KNOCKOUT SEALS

AIR-TIGHT PLENUM BOX, GASKETED - GALVANIZED STEEL



KOS-50-VT

FEATURES

- Gasketed one side

APPLICATIONS

- Knockout seals are inserted in discontinued, open box or enclosure knockouts to protect exposed wires

STANDARD MATERIAL

- Galvanized Steel

CERTIFICATIONS

- UL Listed

PART #	BOX KNOCKOUT SIZE	MASTER QTY.
KOS-50-VT	1/2"	10
KOS-75-VT	3/4"	10
KOS-100-VT	1"	10
KOS-125-VT	1-1/4"	5
KOS-150-VT	1-1/2"	5
KOS-200-VT	2"	5
KOS-250-VT*	2-1/2"	5
KOS-300-VT*	3"	5
KOS-350-VT*	3-1/2"	5
KOS-400-VT*	4"	5
KOS-500-VT*	5"	5
KOS-600-VT*	6"	5

*Not UL Listed

KNOCKOUT SEALS

OIL-TIGHT, 3 PIECE - GALVANIZED STEEL



KOS-50-OT

FEATURES

- Gasketed one side with wing clip for installation

APPLICATIONS

- Knockout seals are inserted in discontinued, open box or enclosure knockouts to protect exposed wires

STANDARD MATERIAL

- Galvanized Steel

PART #	BOX KNOCKOUT SIZE	MASTER QTY.
KOS-50-OT	1/2"	50
KOS-75-OT	3/4"	50
KOS-100-OT	1"	50
KOS-125-OT	1-1/4"	10
KOS-150-OT	1-1/2"	10
KOS-200-OT	2"	10
KOS-250-OT	2-1/2"	10
KOS-300-OT	3"	10
KOS-350-OT	3-1/2"	10
KOS-400-OT	4"	10

KNOCKOUT SEALS

OIL-TIGHT, 3 PIECE - 316 STAINLESS STEEL



KOS-50-OT

FEATURES

- Gasketed one side with wing clip for installation

APPLICATIONS

- Knockout seals are inserted in discontinued, open box or enclosure knockouts to protect exposed wires

STANDARD MATERIAL

- 316 Stainless Steel

PART #	BOX KNOCKOUT SIZE	MASTER QTY.
KOS-50-OTSS	1/2"	50
KOS-75-OTSS	3/4"	50
KOS-100-OTSS	1"	50
KOS-125-OTSS	1-1/4"	10
KOS-150-OTSS	1-1/2"	10
KOS-200-OTSS	2"	10
KOS-250-OTSS	2-1/2"	10
KOS-300-OTSS	3"	10
KOS-350-OTSS	3-1/2"	10
KOS-400-OTSS	4"	10

ROMEX® BRAND SMARTBOX™ ORIGINAL DEVICE BOXES

PVC



MSB1G



MSB1HZ



MSB22+



MSB2G



MSB3G



MSB4G

FEATURES

- One-piece, thick wall molded construction for stability and rigidity
- Wire entrance clamps on top of bottom of box
- Mounts to wood or metal studs 25g.
- 6-32 threaded device holes
- 42 lb. mounting screws provided
- UL Classified for 2-hour fire wall (except MSB4G)

APPLICATIONS

- Southwire Romex® Brand SmartBox™ Original Device Boxes are used in residential or light commercial construction to house wiring devices or distributor power to a number of electrical devices
- Unique design allows use in new work or old work applications

STANDARD MATERIAL

- PVC

CERTIFICATIONS

- UL Listed
- RoHS Compliant

PART #	DESCRIPTION	CUBIC INCHES (CM^3)	MASTER QTY.
MSB1G	1 GANG	18.5 (303.2)	24
MSBHZ	1 GANG, HORIZONTAL	18.5 (303.2)	24
MSB22+	1 GANG, EXTRA VOLUME	22.5 (368.8)	24
MSB2G	2 GANG	38.0 (622.8)	26
MSB3G	3 GANG	57.0 (934.1)	8
MSB4G	4 GANG	74.0 (1212.7)	8

ROMEX® BRAND SMARTBOX™ SHARK TOOTH™ FIXTURE BOX

FIXTURE MOUNTING HOLES 3-1/2" ON CENTER - POLYCARBONATE



MSBST250

FEATURES

- Built in hole saw for perfect hole
- Center located piercing drill bit for location accuracy during installation
- Raised mounting rings with center hole are located inside the back of the box for secure mount basement or attic studs
- Required 9/16" driver (not included)
- Not for use on lath and plaster walls
- 2-1/2" depth

APPLICATIONS

- Southwire Romex® Brand SmartBox™ Shark Tooth™ Fixture Box is used in residential or light commercial construction to mount light fixtures or smoke and carbon dioxide dectors
- Unique design allows use in new work or old work applications

STANDARD MATERIAL

- Polycarbonate

CERTIFICATIONS

- UL Listed
- RoHS Compliant

PART #	DESCRIPTION	CUBIC INCHES (CM^3)	MAX LOAD FIXTURE CAPACITY	MASTER QTY.
MSBST250	OLD WORK CEILING/WALL FIXTURE BOX	16.5 (270.4)	6 LBS.	8

TRACERTOOL™ OUTLET BOX TEMPLATE

METAL OR PLASTIC OLD WORK BOX TRACER



MSBTRAC1

FEATURES

- Integrated vertical and horizontal levels and center point location mark allow for quick and easy placement of the tracer
- Saves time and labor
- Bull's eye accuracy
- Works vertically and horizontally
- Designed and invented by an electrician
- Includes snap-on adapter for plastic box

APPLICATIONS

- Metal or plastic old work box tracer box


PART #	DESCRIPTION	MASTER QTY.
MSBTRAC1	TRACER TOOL	10

ROMEX® BRAND SMARTBOX™ FAN & FIXTURE BOXES

FIXTURE MOUNTING HOLES 2-3/4" & 3-1/2" ON CENTER POLYCARBONATE



MSBRND



MSBFAN

FEATURES

- One-piece, thick wall molded construction for stability and rigidity
- Extra deep for smoke and carbon monoxide detectors
- Easily removed without creating damage to wall or ceiling
- Heavy 42 lb. mounting screws included
- 2-1/2" depth

APPLICATIONS

- Southwire Romex® Brand SmartBox™ Fan & Fixture Boxes are used in residential or light commercial construction to mount light fixtures, fans (MSBFAN only), smoke and carbon dioxide detectors. Unique design allows use in new work or old work applications

STANDARD MATERIAL

- Polycarbonate

CERTIFICATIONS


- UL Listed
- RoHS Compliant

UL LISTED RoHS


PART #	DESCRIPTION	RECOMMENDED MAX LOAD RATINGS		CUBIC INCHES (CM^3)	MASTER QTY.
		CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.		
MSBRND	LIGHT FIXTURE SUPPORT	NO	50	24.0 (393.3)	10
MSBFAN	FAN OR FIXTURE SUPPORT	50	75	24.0 (393.3)	10

ROMEX® BRAND SMARTBOX™ LOW VOLTAGE BOX

PVC



MSBLV1G

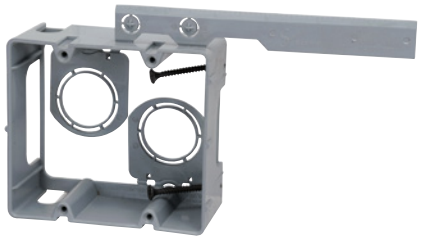

MSBLV2G

RoHS

FEATURES

- Leveling tab for easy alignment to adjacent box
- Heavy 42 lb. mounting screws included
- Horizontal or vertical mount
- 6-32 threaded device mounting holes

APPLICATIONS

- Use to run low voltage cable to where TV and computer locations are suited

STANDARD MATERIAL

- PVC


CERTIFICATIONS

- RoHS Compliant


PART #	DESCRIPTION	CUBIC INCHES (CM^3)	MASTER QTY.
MSBLV1G	1 GANG	10.75 (176.16)	16
MSBLV2G	2 GANG	20.84 (341.51)	50

ROMEX® BRAND SMARTBOX™ MULTI-MOUNT DEVICE BOXES


POLYCARBONATE



MSBMMT1G



MSBMMT2G



MSBMMT3G



MSBMMT4G



MSBMMT5G



MSBMMW



MSBMMT6G

FEATURES

- Removable nail tab for metal stud mounting
- Horizontal or vertical mount
- Removable interior mounting blocks allow for more cubic inch capacity in box
- Top mounting blocks for vertical mounting
- 1/2" Knockouts for blue tube or PVC conduit connections
- Low voltage wall dividers allow for mixed voltages in same box
- Heavy-duty mounting screws provided

APPLICATIONS

- Use to run low voltage cable in TV and home theater applications

STANDARD MATERIAL

- Polycarbonate

CERTIFICATIONS

- UL Listed
- RoHS Compliant


PART #	DESCRIPTION	CUBIC INCHES (CM^3)	INNER QTY.	MASTER QTY.
MSBMMT1G	1 GANG	21.0 (344.2)	---	50
MSBMMT2G	2 GANG	37.0 (606.4)	---	30
MSBMMT3G	3 GANG	55.0 (901.3)	---	30
MSBMMT4G	4 GANG	67.0 (1097.9)	---	30
MSBMMT5G	5 GANG	91.5 (1499.5)	---	4
MSBMMT6G	6 GANG	110.0 (1802.6)	---	4
MSBMMW	WALL DIVIDER - LOW VOLTAGE	---	10	100

DRAFTSEAL™ BOX ACCESSORY - GASKETED

PVC (FOAM GASKETS)



MDSK1G



MDSK2G



MDSK3G



MDSK4G



MDSKRC

FEATURES

- Works with all standard nonmetallic boxes
- Green color easily identifiable after drywall install
- Eliminates the need for caulking or sealants
- Complies with IECC and LEED for envelope sealing
- Meets NEMA OS 4 standards
- Included foam gaskets to cover box wire clamp openings

APPLICATIONS

- Use to reduce drafts, vapors and sound trans missions through exterior walls

STANDARD MATERIAL

- PVC

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	INNER QTY.	MASTER QTY.
MDSK1G	1 GANG	12	48
MDSK2G	2 GANG	8	32
MDSK3G	3 GANG	4	16
MDSK4G	4 GANG	4	16
MDSKRC	ROUND	6	24

RECTANGULAR, DROP-IN DUPLEX FLOOR BOX & COVER KIT

5" X 2.87", 3-1/2" DEEP BOX, NON-ADJUSTABLE



FBCVBR-1TR-KIT



FBCVSS-1TR-KIT

FEATURES

- Simple "drop-in" floor design
- Tab locking cover
- Kit includes device, box and cover

APPLICATIONS

- Use to run power in wood floors, tile or carpet

CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	INCLUDED RECEPTACLE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	END CONDUIT		
FBCVBR-1TR-KIT	BRASS DUPLEX FLIP COVER	20A TR DUPLEX, WHITE	(4) 1/2"	(4) 1/2"	18.0 (295.0)	1
FBCVSS-1TR-KIT	STAINLESS STEEL DUPLEX FLIP COVER	20A TR DUPLEX, WHITE	(4) 1/2"	(4) 1/2"	18.0 (295.0)	1

POP-UP, DROP-IN FLOOR BOX & COVER KIT

5-1/2" ROUND, 3" DEEP HEIGHT ADJUSTABLE BOX



BCVBR-TRWR-KIT



FBCVSS-TRWR-KIT



FBCVBR-3D-KIT



FBCVSS-3D-KIT

FEATURES

- Pop up cover design retracts when not in use
- Simple "drop-in" floor design
- Tab locking covers
- Can be used to tile or carpet finishes
- Kit includes device, box and cover

APPLICATIONS

- Use to run power in wood floor applications


CERTIFICATIONS

- UL Listed

PART #	DESCRIPTION	INCLUDED RECEPTACLE	KNOCKOUTS		CUBIC INCHES (CM^3)	MASTER QTY.
			SIDE CONDUIT	END CONDUIT		
FBCVBR-TRWR-KIT	BRASS, LOCKING POP-UP COVER	20A WR/TR GFCI WHITE	(6) 1/2" & 3/4"	(2) 1/2" & (2) 3/4"	42.8 (701.4)	1
FBCVBR-3D-KIT	BRASS, LOCKING POP-UP COVER	3 DATA PORTS FOR RJ-45, WHITE	(6) 1/2" & 3/4"	(2) 1/2" & (2) 3/4"	42.8 (701.4)	1
FBCVSS-TRWR-KIT	STAINLESS STEEL, LOCKING POP-UP COVER	20A WR/TR GFCI WHITE	(6) 1/2" & 3/4"	(2) 1/2" & (2) 3/4"	42.8 (701.4)	1
FBCVSS-3D-KIT	STAINLESS STEEL, LOCKING POP-UP COVER	3 DATA PORTS FOR RJ-45, WHITE	(6) 1/2" & 3/4"	(2) 1/2"& (2) 3/4"	42.8 (701.4)	1

POP-UP, DROP-IN FLOOR BOX

5-1/2" ROUND, TRIM "GOOF-RING"



FBCVGRBK

FEATURES

- Ring attractively covers up any floor cut-out errors that may extend past the mounted-device base
- Matte black-painted galvanized steel 0.031 in thick

APPLICATIONS

- Trim ring is ideal for use when installing 5-1/2" round pop-up floor boxes

PART #	DESCRIPTION	MASTER QTY.
FBCVGRBK	I.D. 5-1/4", O.D. 6-1/2"	1

CONCRETE TIGHT FLOOR BOX & TILE RINGS

4-1/2" ROUND, 4-3/16" O.D.



FBF-BR



FBF-SS

FEATURES

- Finish matches device cover (sold separately)

APPLICATIONS

- Tile rings are used in tiled floor applications
- Design allows to easily grout to edge
- Designed to fit 4-1/2" round concrete floor boxes


PART #	DESCRIPTION	MASTER QTY
FBF-BR	BRUSHED BRASS	1
FBF-SS	BRUSHED STAINLESS STEEL	1

DUPLEX BOXES & COVER

SINGLE



1236-1238

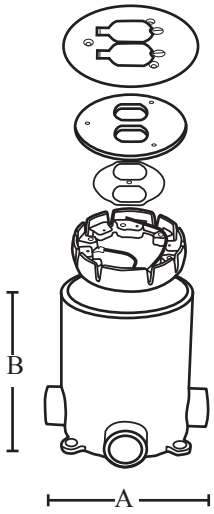

FEATURES

- Round , non-metallic PVC drop in box
- Bronze colored cover
- Includes reducers; corrosion resistant hardware

APPLICATIONS

- Non-multi-functional floor box can be used for power, data, or communications
- Easy trim out
- Accommodates concrete pours of different thickness

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1236	9	18	6.4375"	6"
Floor base box (4)-3/4" hubs, (4)-3/4"-1/2" reducers, level ring & pour cover				
1237	9	17	6.4375"	6"
Floor base box (2)-3/4" hubs, (2)-1" hubs (2)-3/4"-1/2" reducers, level ring & pour cover				
1238	10	3	---	---
PVC-Duplex cover bronze				

Wiring Capacity: Steel Outlet and Switch Boxes; Cubic Inches Maximum Number of Conductors or Minimum Size Box Required – National Electrical Code Article 314.16 (A and B) also table 314.16(A)

The purpose of NEC® Article 314.16 is to determine the maximum conductor count or the minimum box size required for an application. It also may be used to determine how many other conductors may be added without exceeding the Code-prescribed limit. Most applications have determined the number of conductors. The question that then remains is the smallest (minimum) size box that is permitted. The rules of Article 314.16 are to be used to determine the Code-recognized limit. Selection of an outlet or junction box for use in an electrical circuit work must take into consideration the maximum number of wires permitted in the box. Safe electrical practice demands that wires not be jammed into boxes because of the possibility of nicks, abrasions or other damage to the insulating material, creating the potential for ground faults or short circuits. Most applications have determined the number of conductors. The question that then remains is the smallest (minimum) size box that is permitted. The rules of Article 314.16 are to be used to determine the Code-recognized limit.

Selection of an outlet or junction box for use in an electrical circuit work must take into consideration the maximum number of wires permitted in the box. Safe electrical practice demands that wires not be jammed into boxes because of the possibility of nicks, abrasions or other damage to the insulating material, creating the potential for ground faults or short circuits.

Article 314 – Boxes and Fittings

NEC® 314.16 (A and B) also table 314.16(A). Number of Conductors in Outlet, Device, and Junction Boxes, and Conduit Bodies.

Boxes shall be of sufficient size to provide free space for all enclosed conductors. In no case shall the volume of the box, as calculated in (a) below, be less than the fill calculation as calculated in (b) below. The minimum volume for conduit bodies shall be as calculated in (c) below. The provisions of this section shall not apply to terminal housings supplied with motors. See Section 430.12.

Boxes and conduit bodies enclosing conductors, size #4 or larger, shall also comply with the provisions of Section 314-28.

(a) Box Volume Calculation. The volume of a wiring enclosure (box) shall be the total volume of the assembled sections, and, where used, the space provided by plaster rings, domed covers, extension rings, etc., that are marked with their volume in cubic inches or are made from boxes the dimensions of which are listed in Table 314.16(A).

(1) Standard Boxes. The volume of standard boxes that are not marked with a cubic inch capacity shall be as given in

*Table 314.16(A).

(2) Other Boxes. Boxes 100 cubic inches

(1,640 cu. cm^3.) or less, other than those described in table, and nonmetallic boxes shall be durably and legibly marked by the manufacturer with their cubic inch capacity. Boxes described in table that have a larger cubic inch capacity than is designated in the table shall be permitted to have their cubic inch capacity marked as required by this section.

(b) Box Fill Calculations. The volumes in paragraphs (1) through (5) below, as applicable, shall be added together. No allowance shall be required for small fittings such as lock nuts and bushings.

(1) Conductor Fill. Each conductor that originates outside the box and terminates or is spliced within the box shall be counted once, and each conductor that passes through the box without splice or termination shall be counted once. The conductor fill, in cubic inches, shall be computed using Table 314.16(B)

(1). A conductor, no part of which leaves the box, shall not be counted.

Exception: Where an equipment grounding conductor or not over four fixture wires smaller than #14, or both, enter a box, from a domed fixture or similar canopy and terminate within that box, it shall be permitted to omit these conductors from the calculations.

STANDARDS, 2020 NATIONAL ELECTRICAL CODES®

(2) Clamp Fill. Where one or more internal cable clamps, whether factory or field supplied, are present in the box, a single volume allowance in accordance with NEC® 314.16(B)
(2) shall be made based on the largest conductor present in the box. No allowance shall be required for a cable connector with this clamping mechanism outside the box.

(3) Support Fittings Fill. Where one or more fixture studs or hickeys are present in the box, a single volume allowance in accordance with NEC® 314.16(B)(3) shall be made for each type of fitting based on the largest conductor present in the box.

(4) Device or Equipment Fill. For each yoke or strap containing one or more devices or equipment, a double volume allowance in accordance with NEC® 314.16(B)(4) shall be made for each yoke or strap based on the largest conductor connected to a device(s) or equipment supported by that yoke or strap.

(5) **Equipment Grounding Conductor Fill**. Where one or more equipment grounding conductor(s) enter(s) a box, a single volume allowance in accordance with Table 314.16B shall be made based on the largest equipment grounding conductor present in the box. Where an additional set of equipment grounding conductors, as permitted by NEC® 314.16(B)
(5) are present in the box, an additional volume allowance shall be made based on the largest equipment grounding conductor in the additional set.

MOST OFTEN REQUESTED SECTIONS OF THE NATIONAL ELECTRICAL CODE®	HOW SOUTHWIRE® PRODUCTS HELP COMPLETE THE INSTALLATION
250.97 Method of Bonding Service Equipment — Bonding Jumpers. Bonding jumpers are not required for concentric and eccentric knockouts if they are listed.	This Section is used to ensure that there is ground continuity when a concentric or eccentric knockout incorporated in a box. A bonding jumper is not required when using any of the Southwire® patented TKO knockout boxes.
314.27 (A) Boxes at Lighting Fixture Outlets. Boxes to support light fixtures must be listed for fixture support.	Device boxes use #6-32 screws to secure devices such as snap-switches and receptacles. They are not suitable for support of other than very lightweight lighting fixtures, such as some wall-bracket types.
314.27 (B) Floor Boxes. Boxes listed specifically for this application shall be used for receptacles located in the floor. Exception: Boxes located in elevated floors of show windows and similar locations where the authority having jurisdiction judges them free from physical damage, moisture and dirt.	Only boxes that are UL Listed for the application may be fastened into the floor. Southwire® floor boxes are in Section A of this catalog.
314.27 (C) Boxes at Fan Outlets. Boxes at Ceiling-Suspended (Paddle) Fan Outlets. Outlet boxes or outlet box systems used as the sole support of a ceiling suspended (paddle) fan shall be listed, shall be marked by their manufacturer as suitable for this purpose, and shall not support ceiling-suspended (paddle) fans that weigh more than 32kg (70lb).	For any ceiling outlet that is intended to have a ceiling (paddle) fan installed, a UL Listed outlet box rated for ceiling fan support must be installed. Southwire® offers a complete line of products designed for various applications and mounting needs.
314.16 (A)(3) Space for Conductors. Canopies and outlet boxes taken together shall provide adequate space so that fixture conductors and their connecting devices can be properly installed.	When calculating the minimum cubic inch requirements for an outlet box, the canopy may be included in the calculation at the discretion of the Authority Having Jurisdiction. If the canopy of the fixture/fan is marked with the cubic inch capacity, then the additional volume must be accepted by the Authority Having Jurisdiction.
314.27 (B) Maximum Luminaire Weight. Fixtures greater than 50 pounds cannot be supported by a fixture box unless additional independent support is provided.	All outlet boxes that are intended to be used with fixtures are tested in accordance with UL Standard 514A.
250.146 (A) Surface-Mounted Box. Where the box is mounted on the surface, direct metal-to-metal contact between the device yoke and the box or a contact yoke or device that complies with 250.146(B) shall be permitted to ground the receptacle to the box.	This new method provides better bonding for the cover. Southwire flat corner covers and mud rings comply.

MOST OFTEN REQUESTED ARTICLES OF THE 2020 NATIONAL ELECTRICAL CODE®	OW SOUTHWIRE® PRODUCTS HELP COMPLETE THE INSTALLATION
800.133 Exception (A)(1)(d) Installation of Communications Wires, Cables and Equipment – Electric Light or Power Circuits. Communications conductors shall not be placed in any raceway, compartment, outlet box, junction box, or similar fitting with conductors or electric light or power circuits or Class 1 circuits.	When power and voice/data are brought to one enclosure, a means of dividing the wiring is required. Voltage barriers are available on the following box types: 4" and 4-11/16" square boxes, three- and four-gang switch boxes, masonry boxes, and gang boxes.
406.12, Tamper-resistant Receptacles. In all areas specified in 406.12(1) through 406.12(8), all 125 volt, 15 and 20 amp receptacles shall be listed tamper-resistant receptacles.	This is to prevent shocks to small children that like to insert keys, paper clips, etc. into the receptacle slots.
314.24 (B) Depth of Boxes. Minimum depth of boxes for outlets, devices, and utilization equipment.	Boxes must be a minimum depth depending on their use and/or are required to have a minimum clearance behind the device or equipment of per 314.24 (B).

Table 314.16(A) Metal Boxes

BOX TRADE SIZE			MINIMUM VOLUME		MAXIMUM NUMBER OF CONDUCTORS						
MM	IN.		CM^3	IN.3	18	16	14	12	10	8	6
100 x 32	(4 x 1¼)	round/octagonal	205	12.5	8	7	6	5	5	5	2
100 x 38	(4 x 1½)	round/octagonal	254	15.5	10	8	7	6	6	5	3
100 x 54	(4 x 21/8)	round/octagonal	353	21.5	14	12	10	9	8	7	4
100 x 32	(4 x 1¼)	square	395	18	12	10	9	8	7	6	3
100 x 38	(4 x 1½)	square	344	21	14	12	10	9	8	7	4
100 x 54	(4 x 21/8)	square	497	30.3	20	17	15	13	12	10	6
120 x 32	(4-11/16 x 1¼)	square	418	25.5	17	14	12	11	10	8	5
120 x 38	(4-11/16 x 1½)	square	484	29.5	19	16	14	13	11	9	5
120 x 54	(4-11/16 x 21/8	square	689	42	28	24	21	18	16	14	8
75 x 50 x 38	(3 x 2 x 1½)	device	123	7.5	5	4	3	3	3	2	1
75 x 50 x 50	(3 x 2 x 2)	device	164	10	6	5	5	4	4	3	2
75 x 50 x 57	(3 x 2 x 2¼)	device	172	10.5	7	6	5	4	4	3	2
75 x 50 x 65	(3 x 2 x 2½)	device	205	12.5	8	7	6	5	5	4	2
75 x 50 x 70	(3 x 2 x 2¾)	device	230	14	9	8	7	6	5	4	2
75 x 50 x 90	(3 x 2 x 3½)	device	295	18	12	10	9	8	7	6	3
100 x 54 x 38	(4 x 21/8 x 1½)	device	169	10.3	6	5	5	4	4	3	2
100 x 54 x 48	(4 x 21/8 x 17/8)	device	213	13	8	7	6	5	5	4	2
100 x 54 x 54	(4 x 21/8 x 21/8)	device	238	14.5	9	8	7	6	5	4	2
95 x 50 x 65	(3¾ x 2 x 2½)	masonry box/gang	230	14	9	8	7	6	5	4	2
95 x 50 x 90	(3¾ x 2 x 3½)	masonry box/gang	344	21	14	12	10	9	8	7	2
min. 44.5 depth	FS single cover/gang (1¾)		221	13.5	9	7	6	6	5	4	2
min. 60.3 depth	FD single cover/gang (2-3/8)		295	18	12	10	9	8	7	6	3
min. 44.5 depth	FS multiple cover/gang (1¾)		295	18	12	10	9	8	7	6	3
min. 60.3 depth	FD multiple cover/gang (2-3/8)		395	24	16	13	12	10	9	8	4

Table 314.16(B). Volume Allowance Required per Conductor

SIZE OF CONDUCTOR (AWG)	FREE SPACE WITHIN BOX FOR EACH CONDUCTOR	
	CM^3	IN^3
#18	24.6	1.50
#16	28.7	1.75
#14	32.8	2.00
#12	36.9	2.25
#10	41.0	2.50
#8	49.2	3.00
#6	81.9	5.00

STANDARDS, 2020 NATIONAL ELECTRICAL CODES®

Bracket Specification

BRACKET TYPE	AB	B	F (FOR SQ)	F (FOR OCT)	F (FOR HANDY)	J	MS	DW	WB
Length	5-7/8"	2-7/8"	7-1/4"	7-1/4"	7"	3-1/8"	2-1/2"	6-3/4"	71/2"
Width	7/8"	2"	1-9/16"	1"	1"	2-23/32"	1-7/8"	1-3/16"	1-9/16"
Offset	Flush	Flush	Flush	1/2"	1/2"	1/4"	Flush	Flush	Flush
For Metal	X		X	X	X		X	X	
For Wood	X	X	X	X	X	X		X	X



Positions box against face and side of stud.



Face mounts on front edge of wood stud.



Mounts on flat side of stud.



Offset mounts on flat side of stud or joist.



Mounts on flat side of stud.



With spurs, slotted holed for toe-nailing.




Self holding metal stud bracket.



Positions box away from the side of the stud for door trim molding.




Mounts box to side of the stud with positioning spurs.



Far Side support brackets uses to hold boxes rigid in wall cavity.


Knockouts/Priouts

KNOCKOUTS AND PRIOUTS






CABLE PRIOUTS
Always in Pairs.




FLAT-BOTTOMED CABLE PRIOUTS
Eliminate chance of cable being cut.

Clamp Types



Accepts Metal Clad cables from size #14-2 to #10-4



Accepts #14-2 to #10-3 NMSC cables WITH ground



Accepts #14-2 NMSC cables WITH ground




Accepts #14-2 to #10-3 NMSC cables WITH ground

WEATHERPROOF

Southwire weatherproof products provide rugged protection to the outdoor electrical wiring. Made with aluminum die-cast that is covered with powder coat paint to add layer of protection and engineered plastic with UV protection. Products are designed to meet the Underwriters Laboratories standards as well as NEC® electrical code.

Metallic Boxes & Covers
Nonmetallic Boxes & Covers
Metallic & Nonmetallic While in Use Covers
Lighting and Accessories

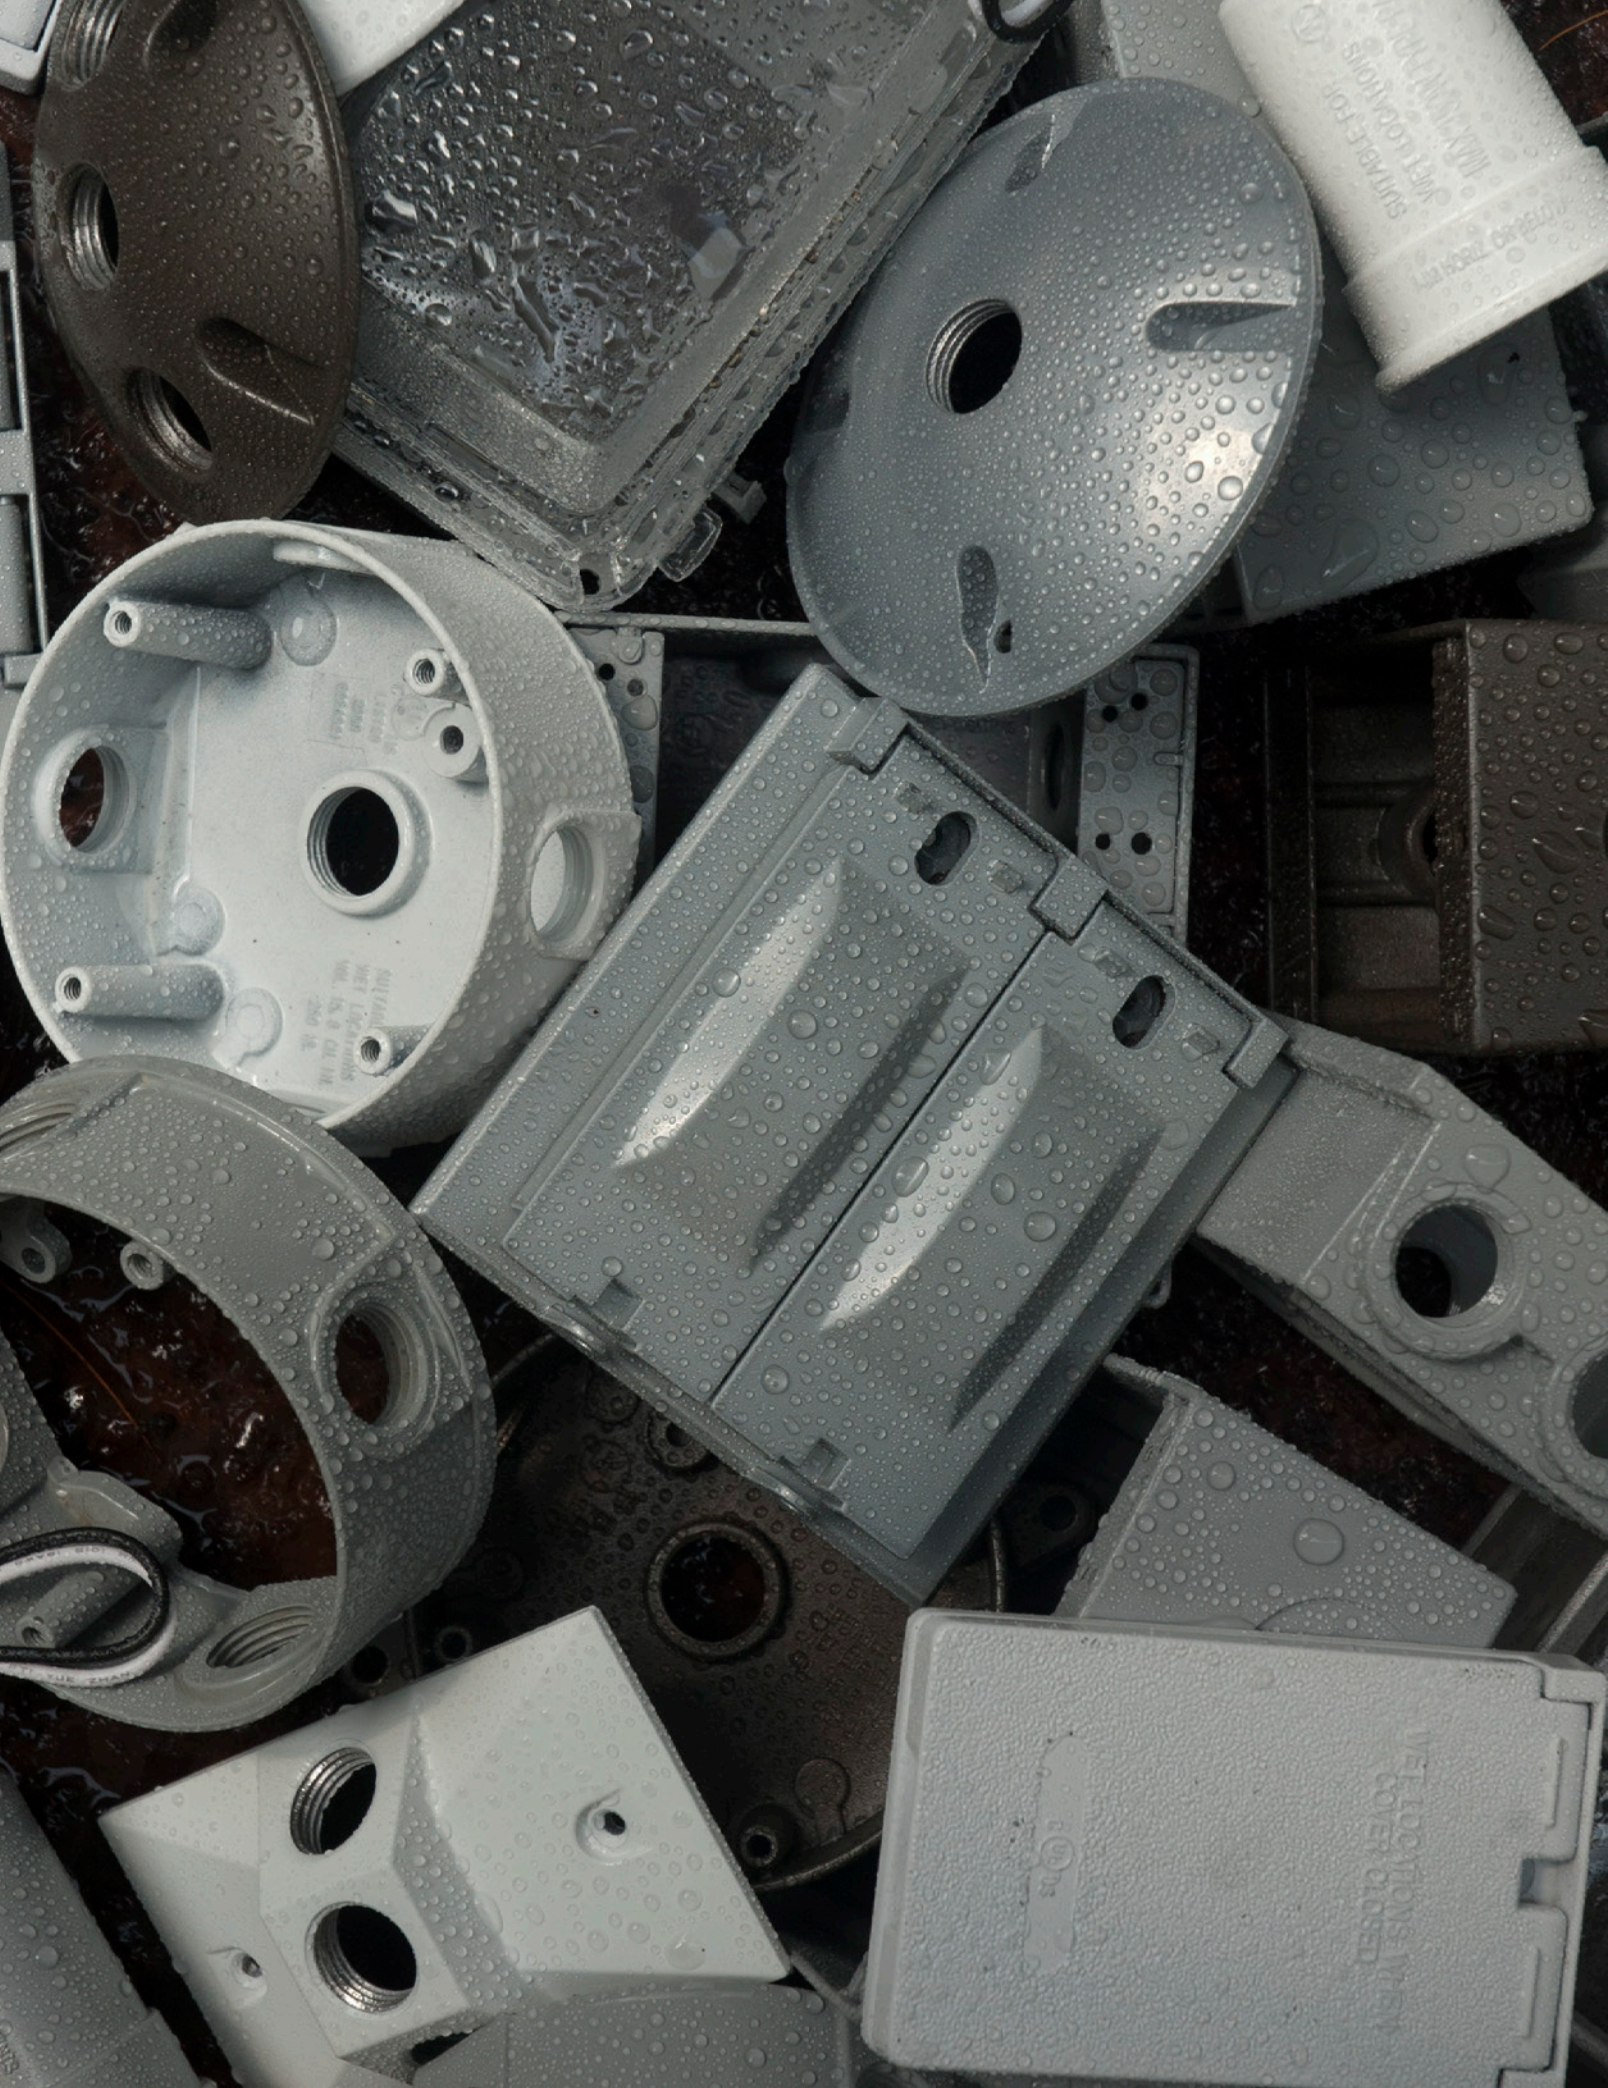


DIE-CAST ALUMINUM BOXES
SINGLE GANG BOXES

3 HOLE



WB1350

UL® Listed and 2011 NEC®
NEMA® 3R Compliant
NEMA FB 1



FEATURES
- 18.3 cubic inch capacity, WB13100 - 16.8 cubic inch capacity
- 1/2", 3/4" or 1" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include 2 closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	THREADED HUB	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB1350	1/2"	GRAY	25	15	2.81"	4.56"	2"
WB1350B	1/2"	BRONZE	25	15	2.81"	4.56"	2"
WB1350W	1/2"	WHITE	25	15	2.81"	4.56"	2"
WB1375	3/4"	GRAY	25	15	2.81"	4.56"	2"
WB1375B	3/4"	BRONZE	25	15	2.81"	4.56"	2"
WB1375W	3/4"	WHITE	25	15	2.81"	4.56"	2"
WB13100	1"	GRAY	25	13	2.81"	4.56"	2"

4 HOLE



WB1450

UL® Listed and 2011 NEC® and
NEMA® 3R Compliant



FEATURES
- 17 cubic inch capacity
- 1/2" or 3/4" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	THREADED HUB	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB1450	1/2"	GRAY	25	14	2.81"	4.56"	2"
WB1450B	1/2"	BRONZE	25	14	2.81"	4.56"	2"
WB1450W	1/2"	WHITE	25	14	2.81"	4.56"	2"
WB1475	3/4"	GRAY	25	14	2.81"	4.56"	2"

DIE-CAST ALUMINUM BOXES
SINGLE GANG BOXES

5 HOLE



WB1550



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- 16.8 cubic inch capacity
- 1/2" or 3/4" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum


STANDARD FINISH
- Premium powder coat finish

PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB1550	1/2"	25	13	2.81"	4.56"	2"
WB1575	3/4"	25	13	2.81"	4.56"	2"

5 HOLE SIDE OPENING



WB1550X



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- 18.3 cubic inch capacity, WB1550X - 16.8 cubic inch capacity
- 1/2", 3/4" or 1"threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights


STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB1550X	1/2"	25	13	2.81"	4.56"	2"
WB1575X	3/4"	25	13	2.81"	4.56"	2"
WB15100X	1"	25	13	2.81"	4.56"	2"

DIE-CAST ALUMINUM BOXES
SINGLE GANG BOXES

3 HOLE DEEP



WDB1350



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- 23.8 cubic inch capacity
- 1/2", 3/4" or 1" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray, bronze and white


APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum


STANDARD FINISH
- Premium powder coat finish

PART #	THREADED HUB	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WDB1350	1/2"	GRAY	20	16	2.81"	4.56"	2.62"
WDB1350B	1/2"	BRONZE	20	16	2.81"	4.56"	2.62"
WDB1350W	1/2"	WHITE	20	16	2.81"	4.56"	2.62"
WDB1375	3/4"	GRAY	20	16	2.81"	4.56"	2.62"
WDB1375B	3/4"	BRONZE	20	16	2.81"	4.56"	2.62"
WDB1375W	3/4"	WHITE	20	16	2.81"	4.56"	2.62"
WDB13100	1"	GRAY	20	16	2.81"	4.56"	2.62"

5 HOLE DEEP SIDE OPENING



WDB1550X



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- 23.8 cubic inch capacity
- 1/2", 3/4" or 1" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WDB1550X	1/2"	20	13	2.81"	4.56"	2.62"
WDB1575X	3/4"	20	13	2.81"	4.56"	2.62"
WDB15100X	1"	20	13	2.81"	4.56"	2.62"

DIE-CAST ALUMINUM BOXES
DOUBLE GANG BOXES

3 HOLE



WB2350



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- 30 cubic inch capacity
- 1/2", 3/4" or 1" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum


STANDARD FINISH
- Premium powder coat finish

PART #	THREADED HUB	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB2350	1/2"	GRAY	10	22	4.56"	4.56"	2"
WB2350B	1/2"	BRONZE	10	22	4.56"	4.56"	2"
WB2350W	1/2"	WHITE	10	22	4.56"	4.56"	2"
WB2375	3/4"	GRAY	10	22	4.56"	4.56"	2"
WB2375B	3/4"	BRONZE	10	22	4.56"	4.56"	2"
WB2375W	3/4"	WHITE	10	22	4.56"	4.56"	2"
WB23100	1"	GRAY	10	22	4.56"	4.56"	2"

4 HOLE



WB2450



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- 30 cubic inch capacity
- 1/2" or 3/4" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB2450	1/2"	10	21	4.56"	4.56"	2"
WB2475	3/4"	10	21	4.56"	4.56"	2"

DIE-CAST ALUMINUM BOXES
DOUBLE GANG BOXES

5 HOLE



WB2550



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB2550	1/2"	10	20	4.56"	4.56"	2"
WB2575	3/4"	10	20	4.56"	4.56"	2"

FEATURES
- 30 cubic inch capacity
- 1/2" or 3/4"threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights


STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish

7 HOLE



WB2750



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB2750	1/2"	10	20	4.56"	4.56"	2"
WB2775	3/4"	10	20	4.56"	4.56 "	2"

FEATURES
- 30 cubic inch capacity
- 1/2" or 3/4" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum


STANDARD FINISH
- Premium powder coat finish

DIE-CAST ALUMINUM BOXES
DOUBLE GANG BOXES

5 HOLE DEEP



WDB2550



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WDB2550	1/2"	10	21	4.56"	4.56"	2.62"
WDB2575	3/4"	10	21	4.56"	4.56 "	2.62"
WDB25100	1"	10	21	4.56"	4.56"	2.62"

FEATURES
- 38.5 cubic inch capacity
- 1/2", 3/4" or 1" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights


STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish

5 HOLE SIDE OPENING



WB2550X



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB2550X	1/2"	10	20	4.56"	4.56"	2"
WB2575X	3/4"	10	20	4.56"	4.56 "	2"
WB25100X	1"	10	20	4.56"	4.56"	2"

FEATURES
- 30 cubic inch capacity
- 1/2", 3/4" or 1" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum


STANDARD FINISH
- Premium powder coat finish

DIE-CAST ALUMINUM BOXES
DOUBLE GANG BOXES

6 HOLE SIDE OPENING



WB2650X



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB2650X	1/2"	10	19	4.56"	4.56"	2"
WB2675X	3/4"	10	19	4.56"	4.56 "	2"

FEATURES
- 30 cubic inch capacity
- 1/2" or 3/4" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights


STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish

7 HOLE SIDE OPENING



WB2775X



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB2750X	1/2"	10	19	4.56"	4.56"	2"
WB2775X	3/4"	10	19	4.56"	4.56 "	2"

FEATURES
- 30 cubic inch capacity
- 1/2" or 3/4" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights


STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish

DIE-CAST ALUMINUM BOXES
TRIPLE GANG BOXES
7 HOLE



WB3750



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB3750	1/2"	5	11	6.374"	4.56"	2.625"
WB3775	3/4"	5	10	6.374"	4.56"	2.625"
WB37100	1"	5	9	6.374"	4.56"	2.625"

FEATURES
- 54 cubic inch capacity
- 1/2", 3/4" or 1" threaded hub
- Superior commercial quality die-cast metal construction
- Boxes include closure plugs, grounding screws and mounting lugs
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For wall or pole mounting of outdoor outlets, switches or floodlights

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


WEATHERPROOF

DIE-CAST ALUMINUM COVERS
SINGLE GANG COVERS

10-IN-1 VERTICAL & HORIZONTAL MULTI-USE COVER



WC1V12



UL® Listed and 2011 NEC® and NEMA® 3R Compliant



FEATURES
- Aluminum cast cover with spring loaded lid
- Can be mounted vertically or horizontally
- Heavy duty die-cast metal construction
- Weather seal gasket to block moisture
- Roomy interior provides space for switches
- Lockable
- Snap in configuration enables tool free installation
- Maximum corrosion resistant fabrication
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- For use with single gang outdoor device box

STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish

PART #	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WC1V12	GRAY	20	22	2.81"	4.56"	.551"
WC1V12B	BRONZE	20	22	2.81"	4.56"	.551"
WC1V12W	WHITE	20	22	2.81"	4.56"	.551"

1 OR 3 HOLE RECTANGLE



WCR1150




WCR1350





UL® Listed and 2011 NEC® and NEMA® 3R Compliant



FEATURES
- 1 or 3 hole 1/2" threaded hub
- Includes gasket and screws
- Fits FS device boxes
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- Fits FS device boxes

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	# OF HOLES	COLOR	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WCR1150	1	GRAY	1/2"	50	14	2.79 "	4.55"	.99"
WCR1150W	1	WHITE	1/2"	50	14	2.79 "	4.55"	.99"
WCR1350	3	GRAY	1/2"	50	14	2.79 "	4.55"	.99"
WCR1350B	3	BRONZE	1/2"	50	14	2.79 "	4.55"	.99"
WCR1350W	3	WHITE	1/2"	50	14	2.79 "	4.55"	.99"

DIE-CAST ALUMINUM COVERS
SINGLE GANG COVERS

DUPLEX VERTICAL



WCV1DUP



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCV1DUP	50	25	2.81"	4.56"

FEATURES
- Aluminum cast cover with a spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with single gang outdoor device box


STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish

DUPLEX HORIZONTAL



WCH1DUPW



UL® Listed and 2011 NEC® and NEMA® 3R Compliant
NEMA FB 1

PART #	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCH1DUP	GRAY	50	35	4.56 "	2.81"
WCH1DUPB	BRONZE	50	35	4.56 "	2.81"
WCH1DUPW	WHITE	50	35	4.56 "	2.81"

FEATURES
- Heavy aluminum die-cast cover with a spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray, bronze or white

APPLICATIONS
- UL listed for wet locations
- Will fit all duplex receptacles in single outlet boxes

STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish

NONMETALLIC MULTI-USE COVERS

18-IN-1 VERTICAL & HORIZONTAL 1-GANG FLAT COVERS



P1GFC-C



P1GFC-G



P1GFC-W

FEATURES


- Easy to install to electrical junction box
- Vertical and horizontal mount option
- Lockable for 1/4" shackles padlock
- Various adapter options for multiple wiring device configurations, 18-in-1
- Includes stainless steel mounting screws
- Preinstalled weatherproof gasket

APPLICATIONS

- UL listed for damp locations
- Provides superior protection for wiring devices

STANDARD MATERIAL

- High-impact polycarbonate with UV protection

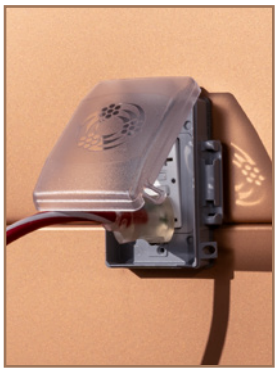




18-IN-1

ROUND 1-1/4" 1-3/8" 1-9/16" 1-5/8"

c UL us

PART #	COLOR	CASE QTY.	WEIGHT/ CASE (LBS.)	A	B	C
P1GFC-C	CLEAR	8	2	3.81	5.38	1.24
P1GFC-G	GRAY	8	2	3.81	5.38	1.24
P1GFC-W	WHITE	8	2	3.81	5.38	1.24



WEATHERPROOF

NONMETALLIC MULTI-USE COVERS

40-IN-1 2-GANG FLAT COVERS



P2GFC-C



P2GFC-G



P2GFC-W



FEATURES

- Easy to install to electrical junction box
- Lockable for 1/4" shackles padlock
- Various adapter options for multiple wiring device configurations, 40-in-1
- Includes stainless steel mounting screws
- Preinstalled weatherproof gasket

APPLICATIONS

- UL listed for damp locations
- Provides superior protection for wiring devices

STANDARD MATERIAL


- High-impact polycarbonate with UV protection

c UL us

40-IN-1

ROUND 1-1/4" 1-3/4" 1-3/8" 2-1/8" 1-9/16" 2-1/4" 1-5/8" 2-7/16" 1-11/16"

PART #	COLOR	CASE QTY.	WEIGHT/ CASE (LBS.)	A	B	C
P2GFC-C	CLEAR	6	2.4	5.4	5.05	1.24
P2GFC-W	GRAY	6	2.4	5.4	5.05	1.24
P2GFC-G	WHITE	6	2.4	5.4	5.05	1.24




WEATHERPROOF

DIE-CAST ALUMINUM COVERS
SINGLE GANG COVERS

RECEPTACLE SWITCH



WCV11



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCV11	50	16	2.77"	4.52"

FEATURES
- Heavy aluminum die-cast cover with a spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- Will fit 1.406" diameter receptacle in single outlet box


STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish

HORIZONTAL GFCI



WCH1GFI



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCH1GFI	GRAY	50	20	4.56"	2.81"
WCH1GFIW	WHITE	50	20	4.56"	2.81"

FEATURES
- Heavy aluminum die-cast cover with a spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray and white

APPLICATIONS
- UL listed for wet locations
- For use with single gang outdoor device box

STANDARD MATERIAL
- Precision die-cast aluminum


STANDARD FINISH
- Premium powder coat finish

DIE-CAST ALUMINUM COVERS
SINGLE GANG COVERS

VERTICAL GFCI



WCV1GFI



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCV1GFI	GRAY	50	20	2.81"	4.56"
WCV1GFIW	WHITE	50	20	2.81"	4.56"

FEATURES
- Heavy aluminum die-cast cover with a spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray and white

APPLICATIONS
- UL listed for wet locations
- For use with single gang outdoor device box


STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish

VERTICAL TOGGLE SWITCH HEAVY DUTY COVER



WSC1VHD



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WSC1VHD	25	7	2.81"	4.57"	.63"

FEATURES
- Designed to fit over a toggle light switch and mounted in a weatherproof box
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with single gang outdoor device box
- NEMA 3R compliant – resistant to rain, ice, and snow

STANDARD MATERIAL
- Precision die-cast aluminum


STANDARD FINISH
- Premium powder coat finish

DIE-CAST ALUMINUM COVERS
SINGLE GANG COVERS

20A/30A RECEPTACLE
30A/50A RECEPTACLE



WCV11.625



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- Heavy aluminum die-cast cover with a spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with single gang outdoor device box

STANDARD MATERIAL
- Precision die-cast aluminum


STANDARD FINISH
- Premium powder coat finish

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCV11.625	50	16	4.57"	2.80"
WCV12.125	50	16	4.57"	2.80"

BLANK



WC1B



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- Weather seal gasket to block moisture
- Installation instructions included
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- For use with single gang outdoor device box

STANDARD MATERIAL
- Steel


PART #	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WC1B	GRAY	100	5	2.77"	4.54"
WC1BB	BRONZE	100	5	2.77"	4.54"
WC1BW	WHITE	100	5	2.77"	4.54"

DIE-CAST ALUMINUM COVERS
DOUBLE GANG COVERS

DUPLEX



WCV2DUP

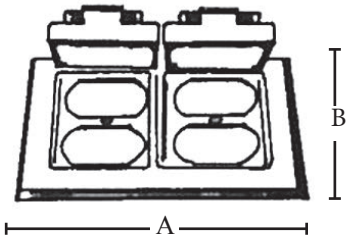

UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCV2DUP	25	15	4.54"	4.54"

FEATURES
- Precision die-cast aluminum cover with a spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with double gang outdoor device box


STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish

DUPLEX & SWITCH



WCV2SDUP

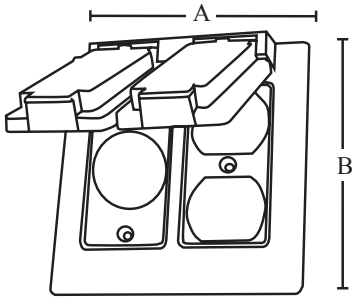

UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCV2SDUP	25	16	4.54"	4.54"

FEATURES
- Precision die-cast aluminum cover with a spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with double gang outdoor device box

STANDARD MATERIAL
- Precision die-cast aluminum


STANDARD FINISH
- Premium powder coat finish

DIE-CAST ALUMINUM COVERS
DOUBLE GANG COVERS

15 AMP SWITCH



WCV21515



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCV21515	25	16	4.54"	4.54"

FEATURES
- Aluminum cast cover with a spring loaded lid
- Opening diameter 1.406" (2)
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with double gang outdoor device box


STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish

5-IN-1 COMBO COVER TOGGLE SWITCH



WC25GFI



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WC25GFI	12	7	4.57"	4.63"	.63"

FEATURES
- Aluminum cast cover with a spring loaded lid with polycarbonate inserts
- Lockable design
- Pre-installed adhesive gasket
- Superior commercial quality die-cast metal construction
- Installation instructions included
- NEMA 3R compliant
- Gray


APPLICATIONS
- UL listed for wet locations
- For use with double gang outdoor device box

STANDARD MATERIAL
- Copper free aluminum


STANDARD FINISH
- Premium powder coat finish

DIE-CAST ALUMINUM COVERS
DOUBLE GANG COVERS

DUPLEX-GFCI



WCV2DUPGFI



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCV2DUPGFI	25	12	4.54"	4.54"

FEATURES
- Die-cast aluminum cover with a spring loaded lid
- Weather seal gasket to keep moisture out
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with double gang outdoor device box


STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish

VERTICAL-GFCI



WCV2GFI



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WCV2GFI	50	35	4.54"	4.54"

FEATURES
- Precision die-cast aluminum cover with a spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with double gang outdoor device box

STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish


WEATHERPROOF

DIE-CAST ALUMINUM COVERS
DOUBLE GANG COVERS

TOGGLE SWITCH HEAVY DUTY



WSC22HD



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WSC22HD	12	7	4.57"	4.63"	.63"

FEATURES
- Designed to fit over a toggle light switch and mounted in a weatherproof box
- Polycarbonate inserts
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- NEMA 3R compliant
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with double gang outdoor device box
- Can be used in NEMA 3R application (resistant to rain, ice, and snow)


STANDARD MATERIAL
- Precision die-cast aluminum

STANDARD FINISH
- Premium powder coat finish

20/50 AMP POWER OUTLET



WCV22125



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	HOLE DIAMETER
WCV22125	8	7	4.54"	4.54"	2.125"
WCV2264	8	7	4.54"	4.54"	2.64"

FEATURES
- Aluminum cast cover with a spring loaded lid
- Weather seal gasket to block moisture
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with double gang outdoor device box

STANDARD MATERIAL
- Copper free aluminum


STANDARD FINISH
- Premium powder coat finish

DIE-CAST ALUMINUM COVERS
DOUBLE GANG COVERS

16-IN-1 VERTICAL MULTI-USE COVER



WC2225



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- Aluminum cast multi-use cover with spring loaded lid
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- For receptacles in damp or wet locations
- For use with double gang outdoor device box

STANDARD MATERIAL
- Precision die-cast aluminum


STANDARD FINISH
- Premium powder coat finish

PART #	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WC2225	GRAY	10	17	4.56"	4.56"	.551"
WC2225B	BRONZE	10	17	4.56"	4.56"	.551"
WC2225W	WHITE	10	17	4.56"	4.56"	.551"

BLANK



WC2B



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- Aluminum cast cover
- Weather seal gasket to block moisture
- Installation instructions included
- Superior commercial quality die-cast metal construction
- Natural, bronze and white

APPLICATIONS
- UL listed for wet locations
- For use with double gang outdoor device box


STANDARD MATERIAL
- Natural - Stamped aluminum
- Bronze and White - Steel

PART #	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WC2B	SILVER	100	11	4.62"	4.57"
WC2BB	BRONZE	100	11	4.62"	4.57"
WC2BW	WHITE	100	11	4.62"	4.57"

DIE-CAST ALUMINUM COVERS
TRIPLE GANG COVERS

64-IN-1 VERTICAL MULTI-USE COVER



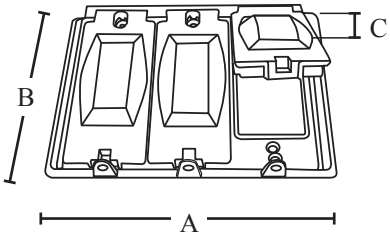

WC3325

UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- Aluminum cast multi-use cover with a spring loaded lid
- Weather seal gasket to block moisture
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with triple gang outdoor device box


STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WC3325	5	6	6.338"	4.57"	.551"

BLANK





WC3B

UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- Aluminum cast cover
- Weather seal gasket to block moisture
- Superior commercial quality die-cast metal construction
- Installation instructions included
- Gray

APPLICATIONS
- UL listed for wet locations
- For use with triple gang outdoor device box
- NEMA 3R compliant – resistant to rain, ice and snow

STANDARD MATERIAL
- Natural - Stamped aluminum

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WC3B	20	8	6.338"	4.57"

NONMETALLIC WHILE IN-USE COVERS

18-IN-1 EXTRA DUTY 1-GANG IN-USE COVER



1GIU-C



1GIU-G



1GIU-W

c UL us

18-IN-1

ROUND 1-1/4" 1-3/8" 1-9/16

PART #	COLOR	CASE QTY.	WEIGHT/CASE (LBS.)	A	B	C
1GIU-C	CLEAR	8	3.0	3.75"	5.25"	3.375"
1GIU-G	GRAY	4	1.5	3.75"	5.25"	3.375"
1GIU-W	WHITE	4	1.5	3.75"	5.25"	3.375"

FEATURES


- Extra Duty Rated Cover for Wet and Damp Locations
- Polycarbonate with UV protection provides durability
- Easy to mount to electrical junction box
- Vertical and Horizontal mount option
- Lockable for 1/4" shackle padlock

APPLICATIONS

- UL listed for wet locations
- Extra Duty non metallic while in-use covers are designed for use whenever weatherproof protection is required while an outlet is in use
- Provides superior protection for residential, industrial, and commerecial electrical wiring devices

STANDARD MATERIAL

- High impact polycarbonate
- Attached Gasket and Stainless-Steel mounting hardware included
- Various adapter options for multitude wiring devices configurations, 18-in-1
- Extra Duty Rated



WEATHERPROOF

SINGLE GANG IN-USE COVER - VERTICAL OR HORIZONTAL

14-IN-1 EXTRA DUTY IN-USE COVER



WCIU1D



FEATURES

- Mounts vertically or horizontally
- Pre-installed adhesive gasket
- Swivel device adapter enables tool free installation
- Snap in adapters enable tool free installation
- Lockable to prevent accidental disconnects
- Meets 2014 NEC article 406.8 (B) (1)
- NEMA 3R compliant
- Gray with clear cover

APPLICATIONS

- UL listed for wet locations
- For use with duplex receptacles, GFCI, toggle, 1-3/8", 1-5/8", 1-11/16" & 2-1/8" round

STANDARD MATERIAL

- High impact polycarbonate


WET LOCATION

c UL us

UL® Listed and 2011 NEC® and NEMA® 3R Compliant



PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C DEPTH
WCIU1D	24	14	2.81"	4.56"	3.50"

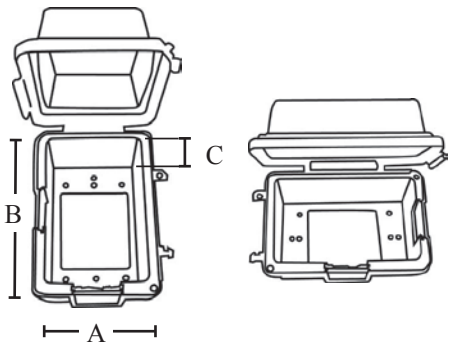

WEATHERPROOF

METALLIC WHILE IN-USE COVERS

9-IN-1 EXTRA DUTY 1-GANG IN-USE COVER



M1GVIU-G



M1GVIU-W



M1GVIU-B



M1GHIU-G

FEATURES

- Extra duty rated cover for wet and damp locations
- Made with durable die-cast aluminum with powder coat protection
- Easy to install to electrical junction box and to use
- Lockable to secure

APPLICATIONS

- UL Listed for wet locations
- Extra duty metallic in-use covers are designed for use whenever weatherproof protection is required while an outlet is in use
- Provide superior protection for residential, industrial, and commercial electrical wiring devices
- Attached weatherproof gasket and stainless-steel mounting hardware included
- Various adapter options for multiple wiring devices configurations 9-in-1





c UL us
LISTED
OUTLET BOX COVER
E52209



MODEL #	MOUNTING ORIENTATION	COLOR	CASE QTY	WEIGHT/ CASE (LBS)	A	B	C
M1GVIU-G	VERTICAL	GRAY	6	7	4.2"	5.7"	3.5"
M1GVIU-W	VERTICAL	WHITE	6	7	4.2"	5.7"	3.5"
M1GVIU-B	VERTICAL	BRONZE	6	7	4.2"	5.7"	3.5"
M1GHIU-G	HORIZONTAL	GRAY	4	4.7	5.9"	4"	3.5"

WEATHERPROOF

NONMETALLIC WHILE IN-USE COVERS

40-IN-1 EXTRA DUTY 2-GANG IN-USE COVER



2GIU-C



2GIU-G



2GIU-W

FEATURES

- Extra duty rated cover for wet and damp locations
- Polycarbonate with UV protection provides durability
- Easy to mount to electrical junction box
- Lockable for 1/4" shackle padlock


APPLICATIONS

- UL listed for wet locations
- Extra duty non metallic while in-use covers are designed for use whenever weatherproof protection is required while an outlet is in use
- Provides superior protection for residential, industrial, and commerecial electrical wiring devices


STANDARD MATERIAL

- High impact polycarbonate
- Attached gasket and stainless-steel mounting hardware included
- Various adapter options for multitude wiring devices configurations, 40-in-1
- Extra duty rated

c UL us



PART #	COLOR	CASE QTY.	WEIGHT/ CASE (LBS.)	A	B	C
2GIU-C	CLEAR	6	3.0	5.55"	5.45"	3.375"
2GIU-G	GRAY	4	2.0	5.55"	5.45"	3.375"
2GIU-W	WHITE	4	2.0	5.55"	5.45"	3.375"



WEATHERPROOF

METALLIC WHILE IN-USE COVERS

40-IN-1 EXTRA DUTY 2-GANG IN-USE COVER



M2GIU-G



M2GIU-W

FEATURES

- Extra duty rated cover for wet and damp locations
- Made with durable die-cast aluminum with powder coat protection
- Easy to install to electrical junction box and to use
- Lockable to secure

APPLICATIONS

- UL Listed for wet locations
- Extra duty metallic in-use covers are designed for use whenever weatherproof protection is required while an outlet is in use
- Provide superior protection for residential, industrial, and commercial electrical wiring devices
- Attached weatherproof gasket and stainless-steel mounting hardware included
- Various adapter options for multiple wiring devices configurations 40-in-1





c UL us
LISTED
OUTLET BOX COVER
E52209

40-IN-1

ROUND

1-1/4" 1-3/4"
1-3/8" 2-1/8"
1-9/16" 2-1/4"
1-5/8" 2-7/16"
1-11/16"

MODEL #	COLOR	CASE QTY	WEIGHT/ CASE (LBS)	A	B	C
M2GIU-G	GRAY	2	3	5.94"	5.73"	3.5"
M2GIU-W	WHITE	2	3	5.94"	5.73"	3.5"

WEATHERPROOF

ROUND COVERS

1, 2, OR 3 HOLE




WRC150



WRC350



WRC250









UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- NPT threads
- Weather seal gasket blocks moisture
- Installation instructions included
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- For use with round outdoor device box

STANDARD MATERIAL
- Precision die-cast aluminum


STANDARD FINISH
- Premium powder coat finish

PART #	# HOLES	THREADED HUB	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WRC150	1	1/2"	GRAY	50	9	4.50"	3.50"	8.75"
WRC150B*	1	1/2"	BRONZE	50	9	4.50"	3.50"	8.75"
WRC250	2	1/2"	GRAY	50	9	4.50"	3.50"	8.75"
WRC350	3	1/2"	GRAY	50	9	4.50"	3.50"	8.75"
WRC350B*	3	1/2”	BRONZE	50	9	4.50"	3.50"	8.75"
WRC150W**	1	1/2"	WHITE	50	9	4.50"	3.50"	8.75"
WRC250W**	2	1/2"	WHITE	50	10	4.50"	3.50"	8.75"
WRC350W**	3	1/2"	WHITE	50	10	4.50"	3.50"	8.75"

BLANK



WRCB



LISTED

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A
WRCB	50	8	4.08"

FEATURES
- Weather seal gasket and screws to keep out moisture
- Will fit round outlet boxes
- Installation instructions included
- Natural finish

APPLICATIONS
- UL listed for wet locations
- For use with round outdoor device box

STANDARD MATERIAL
- Stamped aluminum


CERTIFICATIONS
- UL Standard: UL 514A - UL514D
- Fed. Spec: W-C-586D, AA-50563
- NEMA: FB 1-2014, NEMA 3R
- 2011 NEC®

4" ROUND BOX

5 HOLE



WRB1550W



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- 15.8 cubic inch capacity
- Includes 4 closure plugs and grounding screws
- 1/2"or 3/4" threaded hub
- For wall or ceiling mounting
- Installation instructions included
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- For use with all round outlet box and lampholder covers

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	THREADED HUB	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C DEPTH
WRB1550	1/2"	GRAY	25	14	4.31"	.65"	1.58"
WRB1550B	1/2"	BRONZE	25	14	4.31"	.65"	1.58"
WRB1550W	1/2"	WHITE	25	14	4.31"	.65"	1.58"
WRB1575	3/4"	GRAY	25	14	4.31"	.65"	1.58"
WRB1575W	3/4"	WHITE	25	14	4.31"	.65"	1.58"

4" ROUND EXTENSIONS

4 HOLE



WRB450EXT



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- Corrosion resistant die-cast construction
- 1/2"or 3/4" threaded hub
- Installation instructions included

APPLICATIONS
- UL listed for wet locations
- Expands cubic capacity and enables flush finish

STANDARD MATERIAL
- Copper free aluminum


PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WRB450EXT	1/2"	10	6	4.31"	1.58"
WRB475EXT	3/4"	10	6	4.31"	1.58"

SINGLE GANG EXTENSION

RECTANGLE



WB1EXT



FEATURES
- Installation instructions included
- Superior commercial quality die-cast metal construction

APPLICATIONS
- Expands cubic capacity and enables flush finish

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C DEPTH
WB1EXT	25	6	2.81"	4.56"	1"

4 HOLE



WB1450EXT

UL® Listed and 2011 NEC® and NEMA® 3R Compliant



FEATURES
- 1/2"or 3/4" threaded hub
- Installation instructions included

APPLICATIONS
- UL listed for wet locations
- Expands cubic capacity and enables flush finish

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C DEPTH
WB1450EXT	1/2"	25	18	3.464"	5.236"	1.575"
WB1475EXT	3/4"	25	16	3.464"	5.236"	1.575"

SINGLE GANG EXTENSIONS

6 HOLE



WB1650EXT



UL® Listed and 2011 NEC® and NEMA® 3R Compliant

FEATURES
- NPT threads
- 1/2"or 3/4" threaded hub
- Installation instructions included

APPLICATIONS
- UL listed for wet locations
- Expands cubic capacity and enables flush finish

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


PART #	THREADED HUB	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB1650EXT	1/2"	25	16	3.464"	5.236"	1.575"
WB1675EXT	3/4"	25	14	3.464"	5.236"	1.575"

DOUBLE GANG EXTENSION

SQUARE



WB2EXT



FEATURES
- Installation instructions included
- Superior commercial quality die-cast metal construction

APPLICATIONS
- Expands cubic capacity and enables flush finish

STANDARD MATERIAL
- Copper free aluminum


STANDARD FINISH
- Premium powder coat finish

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
WB2EXT	25	25	4.56"	4.56"	1"

PAR LAMP HOLDERS



WPAR50W



PART #	SIZE	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WPAR50	1/2"	GRAY	50	22	2.57"	2"
WPAR50B	1/2"	BRONZE	50	22	2.57"	2"
WPAR50W	1/2"	WHITE	50	22	2.57"	2"

FEATURES
- Medium base
- 1/2" locknut and gasket included
- 150 Watts max, Par38
- Swivels 180°
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations

STANDARD MATERIAL
- Copper free aluminum

STANDARD FINISH
- Premium powder coat finish


CLOSURE PLUGS



WP75



WP50PL



PART #	SIZE	COLOR	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
WP50	1/2"	GRAY	100	2	.79"	.33"
WP75	3/4"	GRAY	50	2	1"	.30"
WP100	1"	GRAY	25	2	1.23"	.28"
PLASTIC						
WP50PL	1/2"	GRAY	100	1	.79"	.33"
WP50PLB	1/2"	BRONZE	50	1	.79"	.33"
WP50PLW	1/2"	WHITE	50	1	.79"	.33"
WP75PL	3/4"	GRAY	50	1	1"	.30"

FEATURES
- 1/2" - 1" closure plugs
- Gray, bronze and white

APPLICATIONS
- UL listed for wet locations
- Safely seal off unused hubs in metallic outlet boxes

STANDARD MATERIAL
- Cast aluminum with powder coat finish or plastic


STANDARD FINISH
- Cast aluminum – premium powder coat finish

BOX HOLDER



WPBH50

c UL us



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
WPBH50	1/2"	25	40	.38	1.55"	1.125"	.86"

FEATURES
- Can be used as an external means of support to meet the requirements of 2011 NEC Section 314-23
- Gray

APPLICATIONS
- Stubs up electrical boxes, and fire alarms with rigid pipe between bar joists
- Installation is easy—simply insert the box support into the electrical box. The entire assembly is held secure with a 1/2" rigid steel conduit or water pipe


STANDARD MATERIAL
- Corrosion resistant die-cast zinc

RECEPTACLE COVER

SINGLE



1317



FEATURES
- Spring loaded lid; weather seal gasket
- Weatherproof cover when closed
- Cover must be matched to the capacity size of the receptacle

APPLICATIONS
- Fits a single receptacle; prevents damage from water and other elements

STANDARD MATERIAL
- PVC


PART #	SIZE	HOLE DIAMETER	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1317	15 AMP	1.375	10	3	2.8125"	4.5625"
1318	20 AMP	1.625	10	3	2.8125"	4.5625"
1319	30 AMP	1.722	10	3	2.8125"	4.5625"
1320	50 AMP	2.187	10	3	2.8125"	4.5625"

GFI RECEPTACLE COVER

SINGLE



1321



FEATURES
- Spring loaded lid; weather seal gasket
- Weatherproof cover when closed
- Cover must be matched to the capacity size of the receptacle

APPLICATIONS
- Fits a single gang FS type box and covers a standard ground fault interrupter receptacle

STANDARD MATERIAL
- PVC


PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1321	10	3	2.8125"	4.5625"

DUPLEX RECEPTACLE COVER

SINGLE



1323



FEATURES
- Spring loaded lid; weather seal gasket
- Weatherproof cover when closed
- Cover must be matched to the capacity size of the receptacle

APPLICATIONS
- Fits a single gang FS type box and covers a standard ground fault interrupter receptacle

STANDARD MATERIAL
- PVC


PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1323	10	3	2.8125"	4.5625"

TOGGLE SWITCH COVER

SINGLE



1316



FEATURES
- Weatherproof cover fits a single gang FS type box

APPLICATIONS
- Toggle arm operates a standard 115 volt single or double pole switch which is completely enclosed

STANDARD MATERIAL
- PVC


PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1316	10	2	2.8125"	4.5625"

PLUNGER SWITCH COVER

SINGLE



1326



FEATURES
- Weatherproof cover fits a single gang FS type box

APPLICATIONS
- Plunger operates a standard single or double pole 115 volt switch which is completely enclosed

STANDARD MATERIAL
- PVC


PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1326	10	3	2.8125"	4.5625"

SWITCH COVER

SINGLE



1315



FEATURES
- Weatherproof cover when closed

APPLICATIONS
- Fits a single gang FS type box and covers a single or double pole standard 115 volt switch

STANDARD MATERIAL
- PVC


PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1315	10	3	2.8125"	4.5625"

BLANK COVER

SINGLE



1313TZ



FEATURES
- Companion to Topaz single PVC boxes
- Rust proof; corrosion resistant

APPLICATIONS
- For use with a single gang FS type box


STANDARD MATERIAL
- PVC

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1313TZ	50	6	2.875"	4.5625"

DOUBLE



1314



FEATURES
- Companion to Topaz double PVC boxes
- Rust proof; corrosion resistant

APPLICATIONS
- For use with a double gang FS type box

STANDARD MATERIAL
- PVC

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1314	25	5	4.5625"	4.5625"


WEATHERPROOF

TWO TOGGLE SWITCH COVER

DOUBLE



1324



FEATURES

- Weatherproof when closed
- Easy to access toggle arms operate the enclosed switches

APPLICATIONS

- Fits double gang FB box that encloses 2 single or double pole 115 volt standard switches

STANDARD MATERIAL

- PVC

PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1324	10	3	4.5625"	4.5625"

GFCI & TOGGLE SWITCH COVER

DOUBLE



1325

FEATURES

- Spring loaded lid; weather seal gasket
- Weatherproof cover when closed
- Cover must be matched to the capacity size of the receptacle

APPLICATIONS

- Fits a double gang FS type box and covers a standard ground fault interrupter receptacle
- Covers 1 single or double pole 115 volt switch & 1 standard 115 volt duplex receptacle

STANDARD MATERIAL

- PVC


PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)
1325	10	3

FD TYPE BOX

BLANK - SINGLE



1281



PART #	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1281	10	4	2.875"	4.5625"	2.375"

FEATURES
- Mounting feet enable easy installation
- Accommodates standard covers and accessories

APPLICATIONS
- Commonly used for tele-communications applications
- Use for terminations where hub requirements vary


STANDARD MATERIAL
- PVC

FSE TYPE BOXES

SINGLE



1282



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1282	1/2"	10	5	2.875"	4.5625"	2.375"
1283	3/4"	10	5	2.875"	4.5625"	2.375"
1284	1"	10	4	2.875"	4.5625"	2.375"

FEATURES
- Mounting feet enable easy installation
- Accommodates standard covers and accessories
- Surface mounted electrical box which has only one conduit entrance hub with no outlet hub

APPLICATIONS
- Use for dead end terminations


STANDARD MATERIAL
- PVC

FSC TYPE BOXES

SINGLE



1288



PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1288	1/2"	10	5	2.875"	4.5625"	2.375"
1289	3/4"	10	5	2.875"	4.5625"	2.375"
1290	1"	10	5	2.875"	4.5625"	2.375"

FEATURES
- Mounting feet enable easy installation
- Accommodates standard covers and accessories
- Surface mounted electrical box which has one conduit entrance hub in each of the two short walls of the box

APPLICATIONS
- Use for straight line conduit runs, splices and through terminations
- Uses single gang electrical device cover


STANDARD MATERIAL
- PVC

FSS TYPE BOXES

SINGLE



1294



FEATURES

- Mounting feet enable easy installation
- Accommodates standard covers and accessories
- Surface mounted electrical box which has two conduit entrance hubs on one short wall of the box only

APPLICATIONS

- Use for straight line conduit runs, splices and for multiple dead end circuit terminations
- Ideal when additional support is required for stub ups
- Uses single gang electrical device cover

STANDARD MATERIAL

- PVC


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1294	1/2"	10	5	2.875"	4.5625"	2.375"
1295	3/4"	10	5	2.875"	4.5625"	2.375"
1296	1"	10	4	2.875"	4.5625"	2.375"

FSCC TYPE BOXES

SINGLE



1301TZ

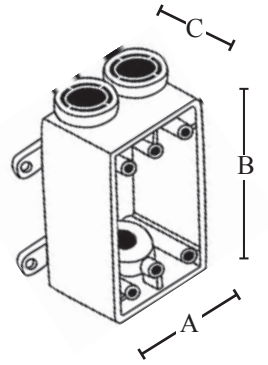

FEATURES

- Mounting feet enable easy installation
- Accommodates standard covers and accessories
- Surface mounted electrical box that has two conduit entrance hubs in one wall of the box and one hub in the opposite wall

APPLICATIONS

- Use for straight line conduit runs, splices and multiple through terminations
- Ideal when additional support is required for stub ups
- Uses single gang electrical device cover

STANDARD MATERIAL

- PVC


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1301TZ	1/2"	10	5	2.875"	4.5625"	2.375"
1302TZ	3/4"	10	5	2.875"	4.5625"	2.375"
1303	1"	10	4	2.875"	4.5625"	2.375"

FDC TYPE BOXES

SINGLE



1307

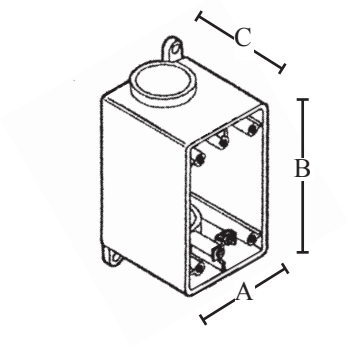

FEATURES

- Surface mounted electrical box with grounding lug has one conduit entrance hub in each of the two short walls of the box

APPLICATIONS

- Use for straight line conduit runs and splices
- Uses single gang electrical device cover

STANDARD MATERIAL

- PVC


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1307	1/2"	10	6	2.875"	4.5625"	3"
1308	3/4"	10	6	2.875"	4.5625"	3"
1309	1"	10	5	2.875"	4.5625"	3"

FDS TYPE BOXES

SINGLE



1310



FEATURES

- Surface mounted electrical box with grounding lug has one conduit hub on short wall side

APPLICATIONS


- Use for straight line conduit runs and splices
- Uses single gang electrical device cover

STANDARD MATERIAL


- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1310	1/2"	10	4	2.875"	4.5625"	3"
1311	3/4"	10	6	2.875"	4.5625"	3"
1312	1"	10	5	2.875"	4.5625"	3"

FSE TYPE BOXES
DOUBLE



1285



FEATURES
- Mounting feet enable easy installation
- Accommodates standard covers and accessories
- Surface mounted electrical box which has only one conduit entrance hub with no outlet hub

APPLICATIONS
- Use for dead end terminations
- Uses double gang device covers


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1285	1/2"	5	3	4.5625"	4.5625"	2.375"
1286	3/4"	5	3	4.5625"	4.5625"	2.375"
1287	1"	5	3	4.5625"	4.5625"	2.375"

FSC TYPE BOXES
DOUBLE



1291



FEATURES
- Mounting feet enable easy installation
- Accommodates standard covers and accessories
- Surface mounted electrical box which has one conduit entrance hub in each of the two opposite walls of the box

APPLICATIONS
- Use for straight line conduit runs, splices and through terminations
- Uses double gang electrical device cover


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1291	1/2"	5	4	4.5625"	4.5625"	2.375"
1292	3/4"	5	4	4.5625"	4.5625"	2.375"
1293	1"	5	3	4.5625"	4.5625"	2.375"

FSS TYPE BOXES
DOUBLE



1297



FEATURES
- Detachable mounting feet enable easy installation
- Accommodates standard covers and accessories
- Surface mounted electrical box which has two conduit entrance hubs on one wall of the box only

APPLICATIONS
- Use for straight line conduit runs, splices and for multiple dead end circuit terminations
- Ideal when additional support is required for stub ups
- Uses double gang electrical device cover


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1297	1/2"	5	4	4.5625"	4.5625"	2.375"
1298	3/4"	5	3	4.5625"	4.5625"	2.375"
1299	1"	5	3	4.5625"	4.5625"	2.375"

FSCC TYPE BOXES
DOUBLE



1304



FEATURES
- Mounting feet enable easy installation
- Accommodates standard covers and accessories
- Surface mounted electrical box that has two conduit entrance hubs in one wall of the box and one hub in the opposite wall

APPLICATIONS
- Use for straight line conduit runs, splices and multiple through terminations
- Ideal when additional support is required for stub ups
- Uses double gang electrical device cover


STANDARD MATERIAL
- PVC

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
1304	1/2"	5	4	4.5625"	4.5625"	2.375"
1305	3/4"	5	4	4.5625"	4.5625"	2.375"
1306	1"	5	3	4.5625	4.5625	2.375

JUNCTION BOXES



1221



FEATURES

- NEMA 3 rated where indicated
- A surface mounted enclosure without entrance hubs which allows multiple conduits to be connected and wire splices made within

APPLICATIONS

- Appropriate round hole for conduit entrance must be cut
- Male adapters or box adapters may be used to secure conduit to the box
- May be concrete encased or buried (not warranted or listed to be watertight for all circumstances)

STANDARD MATERIAL

- PVC
- Screws - Zinc plated steel

PART #	INSIDE DIMENSION	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D
1221*	4" x 4" x 2"	10	7	4.375"	2.375"	4.375"	4.375"
1222*	4" x 4" x 4"	10	11	4.25"	4.375"	4.25"	4.25"
1223*	4" x 4" x 6"	10	15	4.25"	6.3125"	4.25"	4.25"
1224*	5" x 5" x 2"	10	9	5.25"	2.3125"	5.25"	5.25"
1225TZ*	6" x 6" x 4"	10	23	6.375"	4.375"	6.75"	6.375"
1226*	6" x 6" x 6"	5	14	6.375"	6.3125"	6.6875"	6.375"
1227*	8" x 8" x 4"	5	18	8.50"	4.50"	8.875"	8.50"
1228	8" x 8" x 6"	4	18	8.3125"	6.4375"	9"	8.3125"
1229*	8" x 8" x 7"	4	21	8.75"	7.75"	9"	8.75"
1230TZ*	12" x 12" x 4"	2	14	12.50"	4.4375"	12.875"	12.50"
1231*	12" x 12" x 6"	2	18	12.375"	6.50"	12.875"	12.375"
1232*	16" x 14" x 6"	1	12	16.75"	6.75"	17.125" x 15.125"	14.75"
1233**	24" x 18" x 8"	1	23	24.125"	8.25"	24.25" x 18.75"	18.25"
1234†	24" x 24" x 8"	1	36	24.25"	8.25"	24.1875"	24.25"
1235TZ†	36" x 24" x 8"	1	34	24.25"	8.25"	24.25" x 36.25"	36.25"

*** NEMA 3 rated**
**** UL listed with only a Type 1 NEMA rating**
† Not UL listed

VAPORPROOF FIXTURES



VFi100W50- 1/2"
VFi100W75- 3/4"



VFP100W50CG-1/2"
VFP100W75CG-3/4"



VFi100W50CG-1/2"
VFi100W75CG-3/4"
VFi200W50CG-1/2"
VFi200W75CG-3/4"



VFiBOX50-1/2"
VFiBOX75-3/4"



VFW100W50CG-1/2"
VFW100W75CG-3/4"



VFiGLS



VFiCC

64NF

FEATURES

- Ceiling, wall or pendant mounting
- All assembled fixtures are equipped with 5 holes and available with 1/2" & 3/4" threaded holes
- Socket with leads
- Heat resistant glass globe
- Prevents moisture entry
- Industrial grade, fully gasketed
- Designed to protect the interior from deteriorating effect of ice, corrosive fumes, and non-explosive vapors
- Gray

APPLICATIONS


- UL listed for wet locations
- Maintains illumination for safety and performance in inclement weather
- Input Voltage: 120V

STANDARD MATERIAL


- Rugged die-cast copper free aluminum

STANDARD FINISH


- Premium powder coat finish




VFi100W50- 1/2"
VFi100W75- 3/4"




VFiBOX50-1/2"
VFiBOX75-3/4"




VFi100W50CG-1/2"
VFi100W75CG-3/4"
VFi200W50CG-1/2"
VFi200W75CG-3/4"




VFP100W50CG-1/2"
VFP100W75CG-3/4"



VFiCC



VFW100W50CG-1/2"
VFW100W75CG-3/4"



VFiGLS

PART #	# OF HOLES	THREAD SIZE	SHIP CASE	WEIGHT/ CASE (LBS.)	A	B	C
VFI100W50*	5	1/2"	6	13	5.25"	8.50"	3.25"
VFI100W75*	5	3/4"	6	13	5.25"	8.50"	3.25"
VFI100W50CG*	5	1/2"	6	16	5.25"	9"	4.13"
VFI100W75CG*	5	3/4"	6	16	5.25"	9"	4.13"
VFI200W50CG**	5	1/2"	6	16	5.25"	11.50"	5.15"
VFI200W75CG**	5	3/4"	6	16	5.25"	11.50"	5.15"
VFIBOX50	5	1/2"	12	13	5.25"	3.50"	4.13"
VFIBOX75	5	3/4"	12	13	5.25"	3.50"	4.13"
VFP100W50CG*	-	1/2"	6	16	4.13"	10.25"	3.88"
VFP100W75CG*	-	3/4"	6	16	4.13"	10.25"	3.88"
VFW100W50CG*	5	1/2"	6	19	7.25"	10"	4.13"
VFW100W75CG*	5	3/4"	6	19	7.25"	10"	4.13"
VAPORPROOF 7" GLASS GLOBE							
VFIGLS			6	6	3.25"	7"	3"
7" CAST CAGE							
VFICC			16	11	4.25"	7.25"	4.13"

UL Listing:
Suitable for wet locations for use in dwellings. Suitable for use with 90° C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, non-explosive vapors and gases.
*Approved for maximum 100W incandescent. **Approved for maximum 200W incandescent.

WEATHERPROOF

HANGING & SUPPORT

PRODUCTS FOR EVERY APPLICATION

Southwire™ is pleased to offer a comprehensive line of Hanging and Support, including over 300 Spring Steel items, manufactured to our standards of superior quality. Our assortment offers versatile solutions in a variety of sizes used at the stud level of construction to hang, support or mount anything from wire and cable, conduit to rods, to strut, and steel boxes.

Spring Steel Fasteners & Supports create time savings and efficiency on the job site, empowering electricians to demonstrate skill and quality of work through a display of neatly organized cables and wire.

ABOUT SOUTHWIRE™ GEOSEAL™

The Southwire™ GEOSEAL™ anti-corrosion coating is a high-performance, water-based and chrome-free, zinc and aluminum flake technology that protects our Spring Steel Fasteners & Supports from corrosion. Free of toxic metals such as chromium, nickel, cadmium, lead, barium and mercury, the metallic silver coating is odorless and contractor friendly. The GEOSEAL™ coating is salt spray-tested over hundreds of hours to ensure excellent adhesion as well as damage and chemical resistance.

CABLE/ CONDUIT

Secures cable and conduit to electrical support systems

BEAM ATTACHMENT

ROD/WIRE HANGERS

STRUT CLAMPS

CLAMPS AND CLIPS

BRACKETS AND HANGERS

COMBINATION BOX/CONDUIT

PIPE FITTINGS


BEAM ATTACHMENT



CABLE TO FLANGE CLIP



RMX58TZ

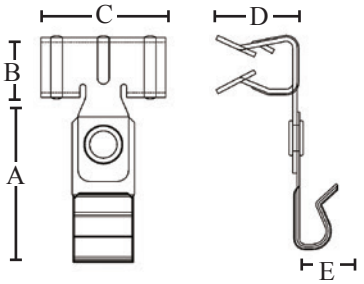

FEATURES
- Supports 14-2 to 12-2 NM cables
- Accommodates flange thickness of 5/16"- 1/2"
- Hammer-on installation

APPLICATION
- Supports nonmetallic sheathed cable to flanges

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239




c UL us LISTED

PART #	BOX QTY.	A	B	C	D	E
RMX58TZ	100	1.44"	.606"	1.26"	.866"	.331"

CABLE CLIPS



SC2DTZ



FEATURES
- Easy hammer-on installation
- Supports cables to beams with no additional hardware

APPLICATION
- Cable clips easily snap on to flanges for cable positioning, no load rating listed

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



c UL us LISTED

PART #	FLANGE THICKNESS	CABLE DIAMETER	BOX QTY.	A	B	C
SC2DTZ	1/16" – 3/16"	.472" – .551"	100	.744"	.343"	.551"
SC2FTZ	1/16" – 3/16"	.748" – .945"	100	1.02"	.356"	.551"
SC4DTZ	3/16" – 9/32"	.472" – .551"	100	.744"	.343"	.551"
SC4ETZ	3/16" – 9/32"	.591" – .709"	100	.645"	.335"	.551"

No load rating, for positioning only

SNAP-CLOSE CONDUIT TO FLANGE CLAMP

BOTTOM MOUNT



812M24TZ



812M58TZ



812M912TZ

FEATURES

- Hammer-on installation
- Snap-close conduit clip pivots 360˚
- Secures EMT, rigid and aluminum conduit to beams

APPLICATION


- Conduit flange mount snap-close clamps support EMT and rigid conduit from beams.
- Equipped with a rotatable joint allows the snap-close conduit clip to rotate 360° to position conduit in different directions

MATERIAL/FINISH

- Spring Steel/GEOSEAL™

CERTIFICATIONS

- UL Standard: UL 2239

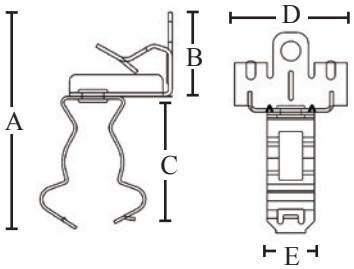



c UL us LISTED

360°

PART #	FLANGE THICKNESS	STATIC LOAD (LBS.)	EMT/RIGID SIZE	FMC SIZE	MC/AC SIZE	BOX QTY.	A	B	C	D	E
6M24TZ	1/8" – 1/4"	75	---	3/8"	14-2 – 12-3	100	2.74"	1.06"	1.68"	1.50"	.63"
812M24TZ	1/8" – 1/4"	75	1/2" & 3/4"	---	---	100	3.11"	1.06"	2.05"	1.50"	.63"
16M24TZ	1/8" – 1/4"	75	1"	---	---	100	3.58"	1.06"	2.52"	1.50"	.63"
20M24TZ	1/8" – 1/4"	75	1-1/4"	---	---	50	4.02"	1.06"	2.96"	1.50"	.63"
32M24TZ	1/8" – 1/4"	75	2"	---	---	50	5.51"	1.63"	3.88"	1.50"	.63"
6M58TZ	5/16" – 1/2"	75	---	3/8"	14-2 – 12-3	100	2.97"	1.29"	1.68"	1.50"	.63"
812M58TZ	5/16" – 1/2"	75	1/2" & 3/4"	---	---	100	3.34"	1.29"	2.05"	1.50"	.63"
6M912TZ	9/16" – 3/4"	75	---	3/8"	14-2 – 12-3	100	3.31"	1.63"	1.68"	1.75"	.63"
812M912TZ	9/16" – 3/4"	75	1/2" & 3/4"	---	---	100	3.68"	1.63"	2.05"	1.75"	.63"
16M912TZ	9/16" – 3/4"	75	1"	---	---	50	4.15"	1.63"	2.52"	1.75"	.63"

SNAP-CLOSE CONDUIT TO FLANGE CLAMP

SIDE MOUNT



812M58SMTZ



24M58SMTZ

FEATURES

- Hammer-on installation
- Snap-close conduit clip pivots 360˚
- Secures EMT, rigid and aluminum conduit to beams

APPLICATION

- Conduit flange mount snap-close clamps support EMT and rigid conduit from beams.
- Equipped with a rotatable joint allows the snap-close conduit clip to rotate 360° to position conduit in different directions

MATERIAL/FINISH


- Spring Steel/GEOSEAL™

CERTIFICATIONS

- UL Standard: UL 2239

c UL us LISTED

360°






PART #	FLANGE THICKNESS	STATIC LOAD (LBS.)	EMT/RIGID SIZE	FMC SIZE	MC/AC SIZE	BOX QTY.	A	B	C	D	E
6M24SMTZ	1/8" – 1/4"	25	---	3/8"	14-2, 12-3	100	2.56"	.886"	1.68"	1.26"	.63"
16M24SMTZ	1/8" – 1/4"	25	1"	---	---	100	3.41"	.886"	2.52"	1.26"	.63"
20M24SMTZ	1/8" – 1/4"	25	1-1/4"	---	---	100	3.85"	.886"	2.96"	1.26"	.63"
24M24SMTZ	1/8" – 1/4"	25	1-1/2"	---	---	50	4.07"	.886"	3.18"	1.26"	.63"
32M24SMTZ	1/8" – 1/4"	25	2"	---	---	50	4.77"	.886"	3.88"	1.26"	.63"
812M24SMTZ	1/8" –1/4"	25	1/2" & 3/4"	---	---	100	2.94"	.886"	2.05"	1.26"	.63"
16M58SMTZ	5/16" – 1/2"	25	1"	---	---	100	3.41"	.886"	2.52"	1.26"	.630
20M58SMTZ	5/16" – 1/2"	25	1-1/4"	---	---	100	3.83"	.866"	2.96"	1.26"	.63"
24M58SMTZ	5/16" – 1/2"	25	1-1/2"	---	---	50	4.07"	.886"	3.18"	1.26"	.63"
32M58SMTZ	5/16" – 1/2"	25	2"	---	---	50	4.77"	.886"	3.88"	1.26"	.63"
812M58SMTZ	5/16" – 1/2"	25	1/2" & 3/4"	---	---	100	2.92"	.866"	2.05"	1.26"	.63"
6M912SMTZ	9/16" – 3/4"	25	---	3/8"	14-2, 12-3	100	2.56"	.886"	1.68"	1.26"	.63"
16M912SMTZ	9/16" – 3/4"	25	1"	---	---	100	3.39"	.866"	2.52"	1.26"	.63"
20M912SMTZ	9/16" – 3/4"	25	1-1/4"	---	---	100	3.83"	.866"	2.96"	1.26"	.63"
32M912SMTZ	9/16" – 3/4"	25	2"	---	---	50	4.77"	.886"	3.88"	1.26"	.63"
812M912SMTZ	9/16" – 3/4"	25	1/2" & 3/4"	---	---	100	2.92"	.866"	2.05"	1.26"	.63"

PUSH-CLOSE CONDUIT TO FLANGE CLIP

BOTTOM MOUNT



12P58TZ

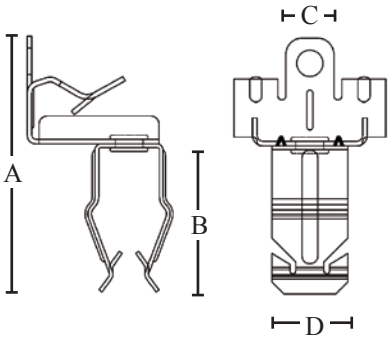

FEATURES

- Hammer-on installation
- Conduit clip pivots 360˚
- Secures EMT, rigid and aluminum conduit to beams

APPLICATION


- Conduit flange mount clips support EMT and rigid conduit from beams.
- Equipped with a rotatable joint, the conduit clip rotates 360° to position conduit in different directions

MATERIAL/FINISH

- Spring Steel/GEOSEAL™

CERTIFICATIONS

- UL Standard: UL 2239

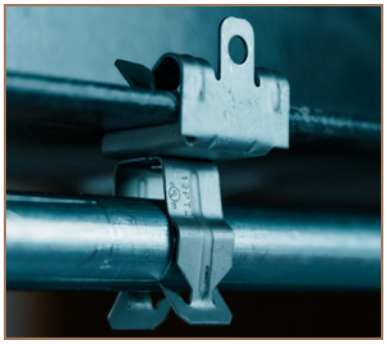

c UL us LISTED

360°


PART #	FLANGE THICKNESS	EMT SIZE	RIGID SIZE	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D
8P24TZ	1/8" – 1/4"	1/2"	---	25	100	2.52"	1.46"	1.50"	.748"
8P58TZ	5/16" – 1/2"	1/2"	---	25	100	2.75"	1.46"	1.50"	.748"
8P912TZ	9/16" – 3/4	1/2"	---	25	50	3.09"	1.46"	1.50"	.748"
12P24TZ	1/8" – 1/4"	3/4"	1/2"	25	100	2.73"	1.67"	1.50"	.748"
12P58TZ	5/16" – 1/2"	3/4"	1/2"	25	100	2.96"	1.67"	1.50"	.748"
12P912TZ	9/16" – 3/4"	3/4"	1/2"	25	100	3.30"	1.67"	1.50"	.748"
16P24TZ	1/8" – 1/4"	1"	3/4"	25	100	3.01"	1.95"	1.50"	.748"
16P58TZ	5/16" – 1/2"	1"	3/4"	25	100	3.24"	1.95"	1.50"	.748"
16P912TZ	9/16" – 3/4"	1"	3/4"	25	100	3.58"	1.95"	1.50"	.748"

PUSH-CLOSE CONDUIT TO FLANGE CLIP

SIDE MOUNT



8P24SMTZ

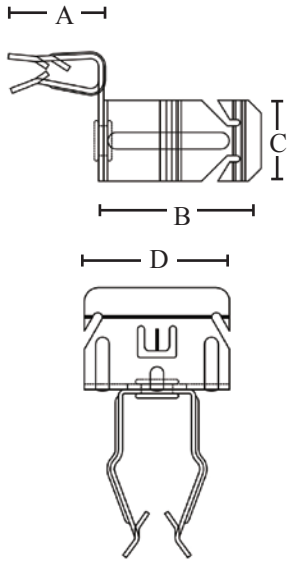

FEATURES

- Hammer-on installation
- Conduit clip pivots 360˚
- Secures EMT, rigid and aluminum conduit to beams

APPLICATION


- Conduit flange mount clips support EMT and rigid conduit from beams.
- Equipped with a rotatable joint, the conduit clip rotates 360° to position conduit in different directions.

MATERIAL/FINISH

- Spring Steel/GEOSEAL™

CERTIFICATIONS

- UL Standard: UL 2239

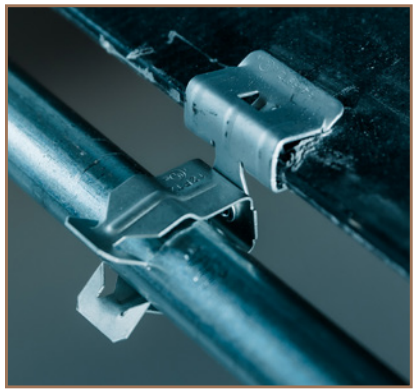


c UL us LISTED

360°

PART #	FLANGE THICKNESS	EMT SIZE	RIGID SIZE	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D
8P24SMTZ	1/8" – 1/4"	1/2"	---	15	100	.886"	1.46"	.748"	1.26"
8P58SMTZ	5/16" – 1/2"	1/2"	---	15	100	.866"	1.46"	.748"	1.26"
8P912SMTZ	9/16" – 3/4"	1/2"	---	15	100	.866"	1.46"	.748'	1.26"
12P24SMTZ	1/8" – 1/4"	3/4"	1/2"	15	100	.886"	1.67"	.748"	1.26"
12P58SMTZ	5/16" – 1/2"	3/4"	1/2"	15	100	.866"	1.67"	.748"	1.26"
12P912SMTZ	9/16" – 3/4"	3/4"	1/2"	15	100	.866"	1.67"	.748"	1.26"
16P24SMTZ	1/8" – 1/4"	1"	3/4"	15	100	.886"	2.37"	.63"	1.26"
16P58SMTZ	5/16" – 1/2"	1"	3/4"	15	100	.866"	2.37"	.63"	1.26"
16P912SMTZ	9/16" – 3/4"	1"	3/4"	15	100	.866"	2.37"	.63"	1.26"

CLAMPS & CLIPS

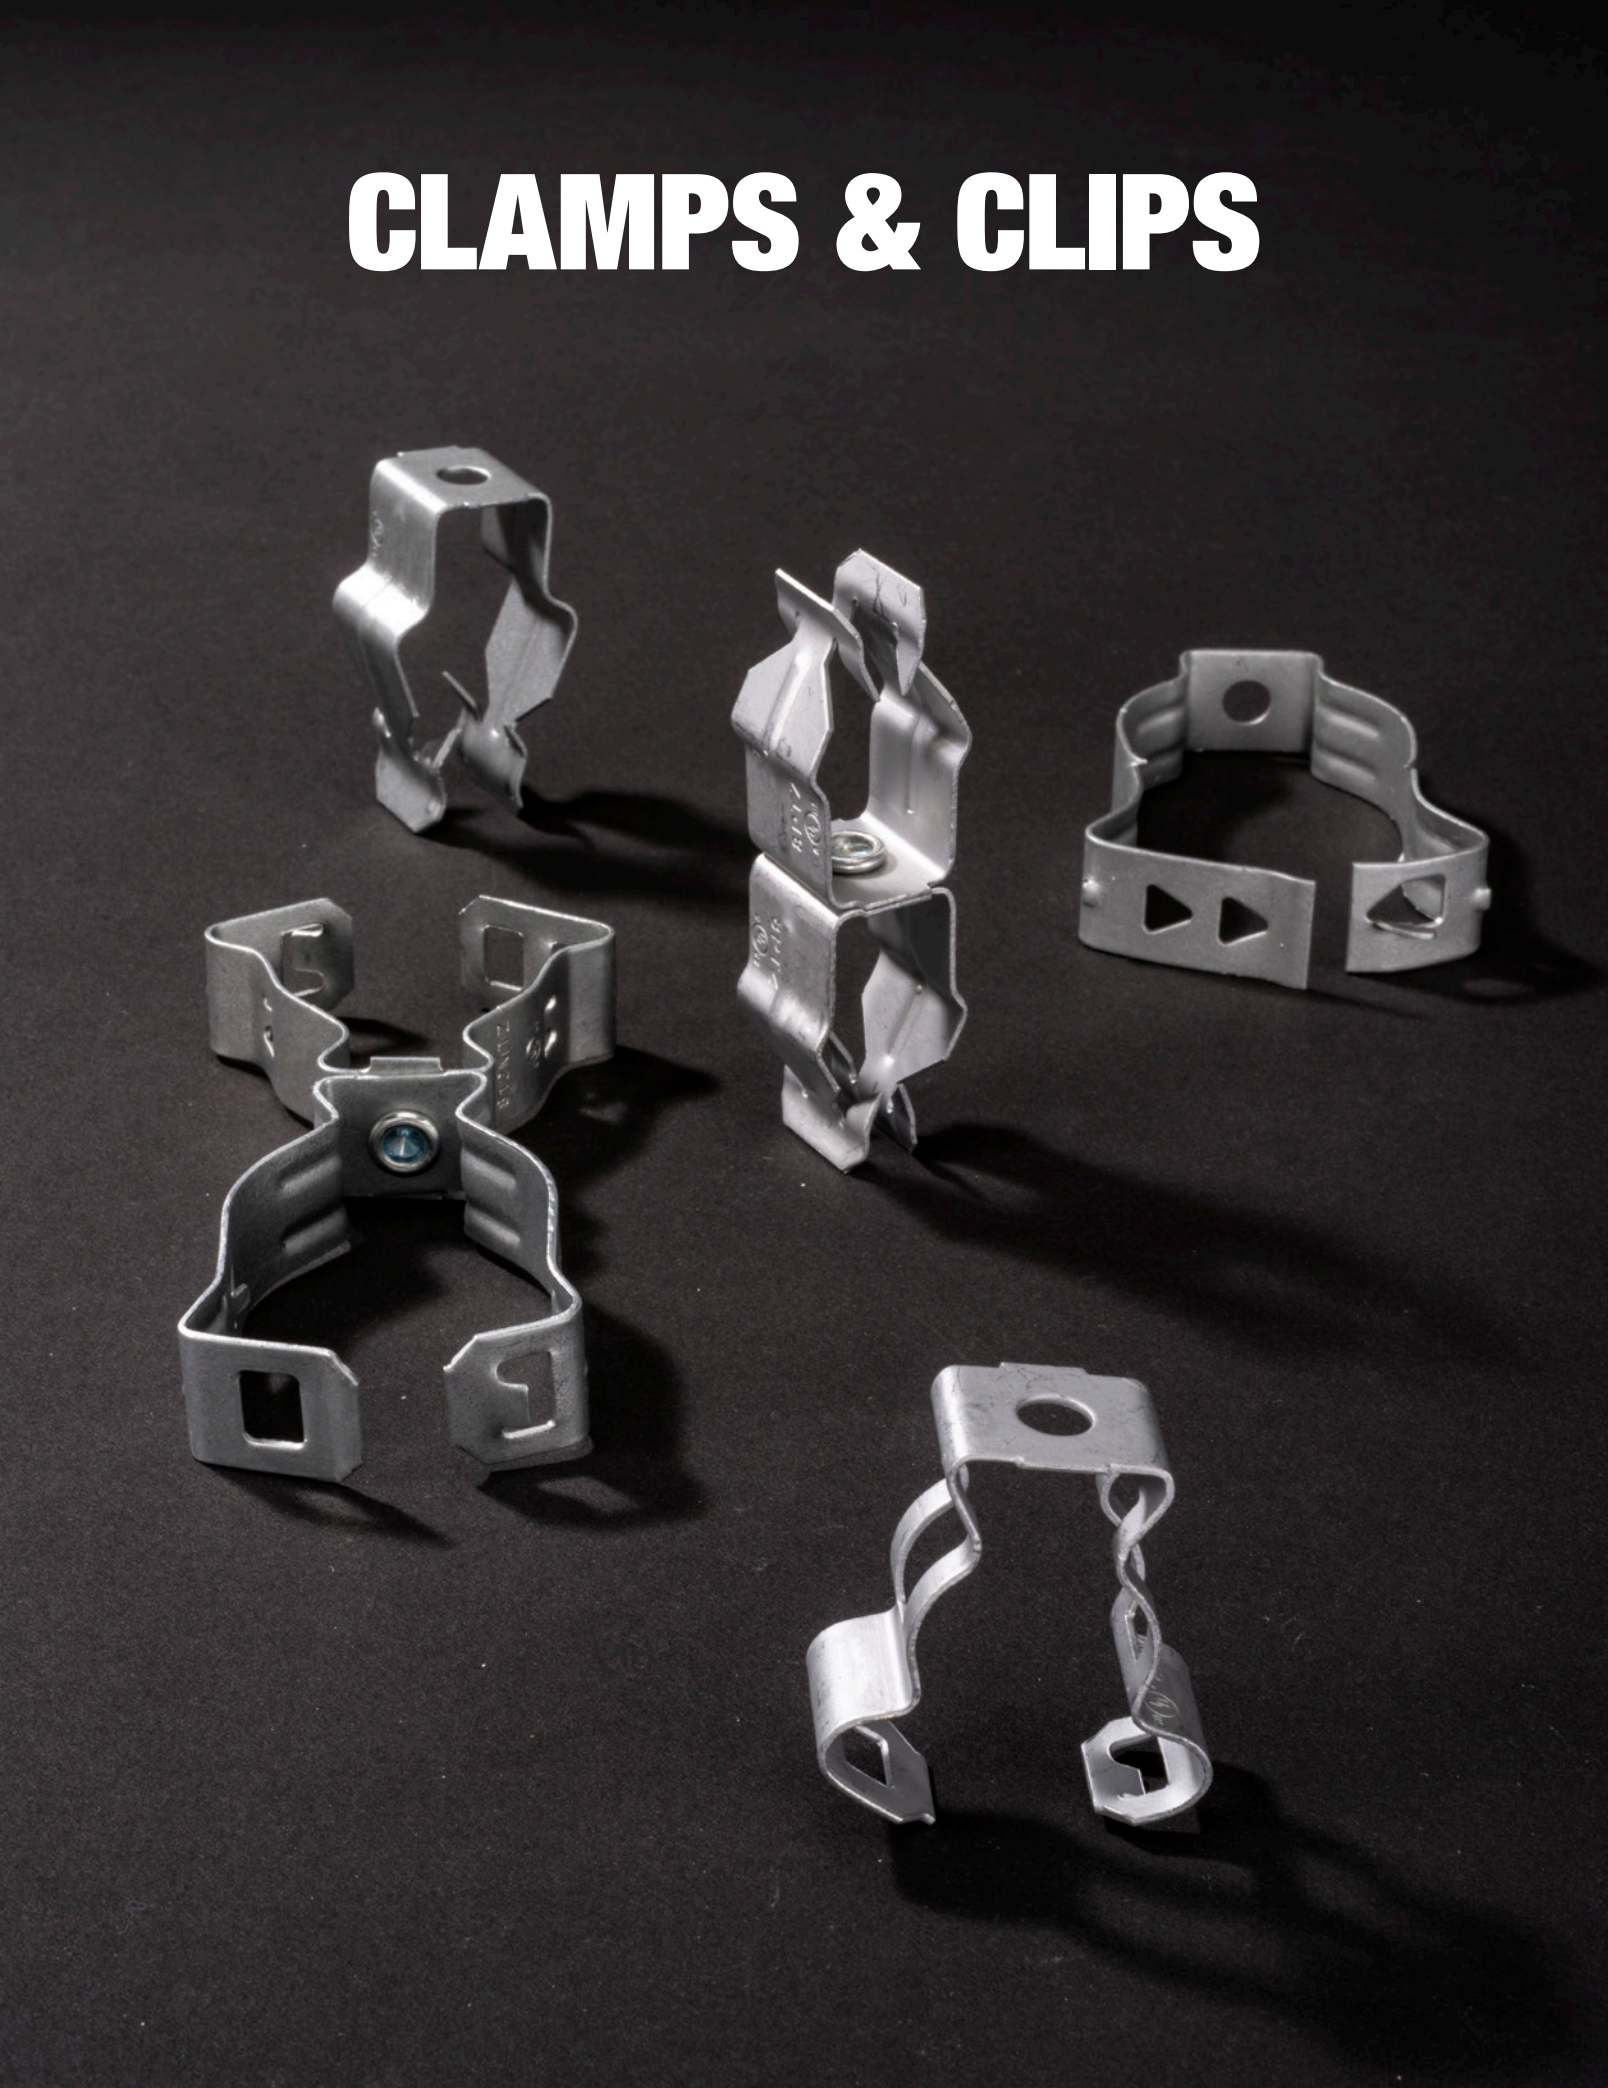

PUSH-IN CONDUIT CLIPS



12PTZ




FEATURES
- Push-in attachment
- Vertical or horizontal mounting
- Combined with other Southwire fasteners to hang conduit to beams, purlins or rods

APPLICATION
- Conduit clips are mounted to structures to support EMT and rigid conduit
- Provides a convenient way to align conduit to electrical boxes

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



c UL us LISTED


PART #	EMT SIZE	RIGID SIZE	HOLE SIZE	HOLE TYPE	LOAD CAPACITY (LBS.) VERTICAL	LOAD CAPACITY (LBS.) HORIZONTAL	A	B	C	BOX QTY.
8PTZ	1/2"	---	9/32"	PLAIN	25	15	1.46"	.67"	.748"	100
12PTZ	3/4"	1/2"	9/32"	PLAIN	25	15	1.67"	.709"	.748"	100
16PTZ	1"	3/4"	9/32"	PLAIN	25	15	2.37"	.787"	.63"	100

PUSH-IN CONDUIT HANGERS

BACK-TO-BACK FOR EMT



8P8PTZ

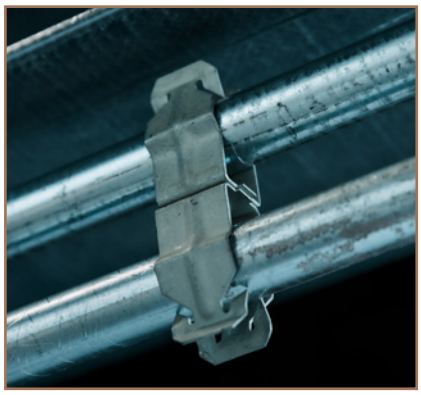

c UL us LISTED

FEATURES
- No tools are required for installation
- Simply snap in conduit and it is secured by sharp teeth that bite against the pipe's metallic surface

APPLICATION
- Back-to-back push-in conduit hangers allow the installer to support two conduit of the same or different sizes with the appropriate spacing required by code

MATERIAL/FINISH
- Spring Steel/Zinc plated

CERTIFICATIONS
- cULus listed

PART #	(1) EMT SIZE	(2) EMT SIZE	LOAD CAPACITY (LBS.)	BOX QTY.
8P8PTZ	1/2"	1/2"	25	100

SNAP-CLOSE CONDUIT CLAMPS



6MTZ



16MTZ



20MTZ


FEATURES
- Snap-close conduit attachment
- Vertical or horizontal mounting

APPLICATION
- Conduit clamps are mounted to structures to support EMT and rigid conduit
- Provides a convenient way to align conduit to electrical boxes

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239

c UL us LISTED






PART #	HOLE TYPE	HOLE SIZE	FMC SIZE	MC/AC SIZE	EMT RIGID SIZE	LOAD CAPACITY (LBS.) VERTICAL	LOAD CAPACITY (LBS.) HORIZONTAL	BOX QTY.	A	B	C
6MTZ	PLAIN	9/32"	3/8"	14-2 – 12-3	---	100	25	100	1.68"	.807"	.63"
16MTZ	PLAIN	9/32"	---	---	1"	100	25	100	2.52"	.787"	.63"
20MTZ	PLAIN	9/32"	---	---	1-1/4"	100	25	100	2.96"	.807"	.63"
24MTZ	PLAIN	9/32"	---	---	1-1/2"	100	25	100	3.18"	.807"	.63"
32MTZ	PLAIN	9/32"	---	---	2"	100	25	100	3.88"	.807"	.63"
812MTZ	PLAIN	9/32"	---	---	1/2" & 3/4"	100	25	100	2.05"	.807"	.63"
6M4ITZ	THREADED	1/4"	3/8"	14-2 – 12-3	---	100	25	100	1.68"	.807"	.630
16M4ITZ	THREADED	1/4"	---	---	1"	100	25	100	2.52"	.787"	.63"
20M4ITZ	THREADED	1/4"	---	---	1-1/4"	100	25	100	2.96"	.807"	.63"
24M4ITZ	THREADED	1/4"	---	---	1-1/2"	100	25	100	3.18"	.807"	.63"
32M4ITZ	THREADED	1/4"	---	---	2"	100	25	100	3.88"	.807"	.63"
812M4ITZ	THREADED	1/4"	---	---	1/2" & 3/4"	100	25	100	2.05"	.807"	.63"

CONDUIT TO CONDUIT CLAMP



16812MTZ





FEATURES
- Conduit quickly set in place and are secured by snapping the fastener closed to secure it in place
- Riveted assembly allows both conduit hangers to rotate to any position required

APPLICATION
- Snap-close conduit to conduit clamps support two conduit of different sizes running in parallel or perpendicular paths

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239


PART #	(1) EMT SIZE	(2) EMT SIZE	LOAD CAPACITY (LBS.)	BOX QTY.	A	B	C
16812MTZ	1/2" or 3/4"	1"	100	100	1.92"	2.39"	.629"

Total load must not exceed 100 lbs.

THROUGH STUD CABLE/CONDUIT CLAMP



BAKC38





FEATURES
- Hanger provides a quick means of support for horizontal conduit runs of EMT, Rigid, MC/AC Cable through metal stud openings
- Supports 1/2", 3/4" EMT, 3/4" Rigid
- Reduces conduit rattling
- Screws to metal or wood studs

APPLICATION
- Snap-in conduit hangers are attached to an angle bracket that accommodates multiple mounting methods
- Hangers can be used with beam clamps or directly mounted to a variety of wood or metal surfaces when conduit need to be offset from walls

MATERIAL/FINISH
- Spring Steel/Black finish

CERTIFICATIONS
- UL or cULus


PART #	EMT SIZE	BOX QTY.	A	B	C	D
BAKC38*	3/8"	100	1.68"	.957"	.748"	.63"
FB812MTZ**	1/2" or 3/4"	100	2.05"	.957"	.748"	.63"

*UL | **cULus

CONDUIT HANGERS WITH BOLT



CD0BTZ



FEATURES
- Assembled with nut and bolt
- Use in areas where EMT or rigid conduit are used

APPLICATION
- Indoor or outdoor, use to secure and suspend conduit from overhead supports

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIONS
- UL Standard: UL2239



c UL us LISTED

	RIGID SIZE	EMT SIZE	BOLT SIZE	BOX QTY.	A	B	C	D
CD0BTZ	1/2"	1/2"	1/4" – 20	100	1.875"	.75"	.725"	.25"
CD1BTZ	3/4"	3/4"	1/4" – 20	100	2.125"	.75"	.85"	.25"
CD2BTZ	1"	1"	1/4" – 20	100	2.437"	.875"	.975"	.25"
CD2.5BTZ	---	1-1/4"	1/4" – 20	100	2.875"	.875"	.975"	.25"
604	1-1/4"	1-1/2"	1/4" – 20	100	2.75"	.875"	.975"	.25"
CD4BTZ	1-1/2"	---	1/4" – 20	100	3.125"	1"	1.125"	.25"
CD5BTZ	2"	2"	1/4" – 20	50	3.875"	1"	1.145"	.25"
CD6BTZ	2-1/2"	2-1/2"	5/16" – 18	50	4.625"	1.25"	1.225"	.3125"
CD7BTZ	3"	3"	5/16" – 18	25	5.50"	1.25"	1.275"	.3125"
CD8BTZ	3-1/2"	3-1/2"	5/16" – 18	25	5.75"	1.25"	1.275"	.3125"
CD9BTZ	4"	4"	5/16" – 18	25	6.25"	1.25"	1.275"	.3125"

		PULL FORCE (LOAD RATING)					
		(EMT)		(RMC) (IMC)		RIGID PVC CONDUIT	
TRADE SIZE	METRIC DESIGNATOR	PULL FORCE (LBF)	REFERENCE LOAD RATING (LB)	PULL FORCE (LBF)	REFERENCE LOAD RATING (LB)	PULL FORCE (LBF)	REFERENCE LOAD RATING (LB)
1/2"	(16)	150	50	150	50	150	50
3/4"	(21)	150	50	150	50	150	50
1"	(27)	190	60	190	60	160	50
1-1/4"	(35)	225	75	225	75	175	55
1-1/2"	(41)	250	80	250	80	180	60
2"	(53)	300	100	300	100	200	65
2-1/2"	(63)	375	125	375 475	125 160	250	80
3"	(78)	500	160	500 875	165 295	300	100
3-1/2"	(91)	600	200	600 1125	200 375	375	125
4"	(103)	700	230	700	230	450	150

CONDUIT HANGERS FOR EMT OR RIGID/IMC

SELF THREADING WITH BOLT (NO NUT)



SW0-WBA

c UL us LISTED

FEATURES
- 3/8" - 2" self threading (no nut required)

APPLICATION
- Secures EMT or Rigid/IMC conduit to threaded rod, insulated supports, or mounting surface

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIONS
- cULus Listed

PART #	EMT SIZE	RIGID SIZE	BOX QTY.
SW0-WBA	1/2"	3/8"	100
1-WBA	3/4"	3/4"	100
2-WBA	1"	1"	100
2-1/2-WBA	1-1/4"	---	100
3-WBA	1-1/2"	1-1/4"	100
4-WBA	---	1-1/2"	100
5-WBA	2"	2"	50
6-WBA	2-1/2"	2-1/2"	50
7-WBA	3"	3"	50

CONDUIT HANGERS FOR EMT OR RIGID/IMC AND SWING BOLT



CHQ-50



SNAP ON CONDUIT, SWING IN BOLT

FEATURES
- Swing in bolt feature saves installation time

APPLICATION
- For EMT only

MATERIAL/FINISH
- Steel/Zinc plated

PART #	EMT SIZE	BOX QTY.
CHQ-50	1/2"	50
CHQ-75	3/4"	25

CONDUIT HANGERS, WITH BOLT & NUT

STEEL



SW0-WBAS



CHSS-50

FEATURES

- Corrosion-resistant material is ideal for corrosive environments

APPLICATION

- Secures EMT or Rigid/IMC conduit to threaded rod, insulated supports, or mounting surface

MATERIAL/FINISH

- 301 and 316 Stainless steel

PART #	MATERIAL	EMT SIZE	RIGID SIZE	BOX QTY.
CHSS-50	316 STAINLESS STEEL	1/2"	3/8" OR 1/2"	50
CHSS-75		3/4"	3/4"	25
CHSS-100		1"	1"	25
CHSS-125		1-1/4"	---	25
CHSS-150		1-1/2"	1-1/4"	25
CHSS-175			1-1/2"	20
CHSS-200		2"	2"	10
CHSS-250		2-1/2"	2-1/2"	10
CHSS-300		3"	3"	10
CHSS-350		3-1/2"	3-1/2"	10
CHSS-400		4"	4"	10
SW0-WBAS	301 STAINLESS STEEL	1/2"	3/8"	100
1-WBAS		3/4"	3/4"	100
2-WBAS		1"	1"	100
2-1/2-WBAS		1-1/4"	---	100
3-WBAS		1-1/2"	1-1/4"	100
4-WBAS			1-1/2"	100
5-WBAS		2"	2"	50
6-WBAS		2-1/2"	2-1/2"	50
7-WBAS		3"	3"	25
8-WBAS		3-1/2"	3-1/2"	25
9-WBAS		4"	4"	25

STRUT CLAMPS



STRUT CLAMP FOR EMT CONDUIT



SCE-50

FEATURES
- Hex/slotted nut, square bolt

APPLICATION
- Secures EMT electrical conduit perpendicular to strut.


MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	EMT SIZE	INNER QTY.	MASTER QTY.
SCE-50	1/2"	---	100
SCE-75	3/4"	---	100
SCE-100	1"	---	100
SCE-125	1-1/4"	---	50
SCE-150	1-1/2"	---	50
SCE-200	2"	1	50

UNIVERSAL ONE-PIECE STRUT CLAMP







SK85ITZ

c UL us LISTED

FEATURES
- For use with EMT/Rigid and IMC conduit
- All screws - 5/16" x 1-1/4" slotted hex head

APPLICATION
- Use to support stationary pipe and tubing lines from strut channel

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIONS
- UL Standard: UL 2239
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014

PART #	EMT RIGID SIZE	STATIC LOAD (LBS.)	BOX QTY.	A	B
SK85ITZ	1/2"	200	100	1.24"	2.30"
SK125ITZ	3/4"	200	100	1.24"	2.46"
SK165ITZ	1"	200	100	1.24"	2.68"
SK205ITZ	1-1/4"	200	100	1.24"	3.21"
SK245ITZ	1-1/2"	200	50	1.24"	3.42"
SK325ITZ	2"	200	50	1.24"	4"
SK405ITZ	2-1/2"	350	50	1.24"	5"
SK485ITZ	3"	350	25	1.24"	5.55"
SK565ITZ	3-1/2"	350	25	1.24"	6"
SK645ITZ	4"	350	25	1.24"	6.50"

STRUT CLAMP - UNIVERSAL STEEL

STEEL



2101

c UL us LISTED

FEATURES
- Hex/slotted nut, square bolt

APPLICATION
- Secures Rigid electrical conduit perpendicular to strut

CERTIFICATIONS
- cULus listed for 21XX series

PART #	EMT/RIGID SIZE	MATERIAL	BOX QTY.
2101	1/2"	ZINC PLATED STEEL	100
2102	3/4"		100
2103	1"		50
2104	1-1/4"		50
2105	1-1/2"		50
2106	2"		50
2107	2-1/2"		50
2108	3"		25
2109	3-1/2"		25
2110	4"		25
STR500	5"		25
STR600	6"		25

STRUT CLAMP - FOR RIGID CONDUIT

316 STAINLESS STEEL



STR50-SS

c UL us LISTED

FEATURES
- Hex/slotted nut, square bolt

APPLICATION
- Secures Rigid electrical conduit perpendicular to strut

CERTIFICATIONS
- cULus listed for 21XX series

PART #	RIGID SIZE	MATERIAL	BOX QTY.
STR50-SS	1/2"	316 STAINLESS STEEL	100
STR75-SS	3/4"		100
STR100-SS	1"		100
STR125-SS	1-1/4"		100
STR150-SS	1-1/2"		100
STR200-SS	2"		100
STR250-SS	2-1/2"		100
STR300-SS	3"		100
STR350-SS	3-1/2"		100
STR400-SS	4"		100
STR500-SS	5"		25
STR600-SS	6"		25

STRUT CLAMP, ONE PIECE

SOFT SADDLE



OPCC-50

LISTED

FEATURES
- Design has no screws or bolts to drop as you fit it to the strut channel
- Hex/slotted/phillips bolt

APPLICATION
- Secures electrical conduit or cable perpendicular to strut

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Listed

PART #	EMT/RIGID SIZE	BOX QTY.
OPCC-50	1/2"	100
OPCC-75	3/4"	100
OPCC-100	1"	50


BEAM CLAMP, REVERSIBLE STAMPED

STEEL OR 304 STAINLESS STEEL



JFCS-3816SS

LISTED



FEATURES
- Through-hole in beam clamps allows drop rod length adjustment

APPLICATION
- Adjusts to accommodate the field installation finished height

MATERIAL/FINISH
- Steel/Zinc plated or 304 Stainless steel

CERTIFICATIONS
- UL Listed

PART #	MATERIAL	JAW OPENING	HOLE	BOX QTY.
JFCS-3816	ZINC PLATED STEEL	3/4"	3/8" – 16	25
JFCS-3816SS	304 STAINLESS STEEL	3/4"	3/8" – 16	25


ONE PIECE STRUT CLAMP



SCH12BTZ



SCH12TZ



LISTED

FEATURES
- Design has no screws or bolts to drop as you fit it to the strut channel
- Hex/slotted/Phillips bolt 1/4"-20 thread

APPLICATION
- Secures electrical conduit or cable perpendicular to strut

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Listed
- UL Standard: UL 2239

PART #	BOOT FEATURE	EMT SIZE	RIGID SIZE	STATIC LOAD	BOX QTY.	A	B	C
SCH8TZ	NO BOOT	1/2"	---	200	100	1.87"	.75"	1.34"
SCH12TZ	NO BOOT	3/4"	1/2"	200	100	2.13"	.75"	1.38"
SCH16TZ	NO BOOT	1"	3/4"	200	100	2.24"	.75"	1.38"
SCH20TZ	NO BOOT	1-1/4"	1"	200	100	2.48"	.75"	1.38"
SCH6BTZ	BOOT	3/8"	---	200	100	1.55"	.75"	1.22"
SCH8BTZ	BOOT	1/2"	---	200	100	1.87"	.75"	1.34"
SCH12BTZ	BOOT	3/4"	1/2"	200	100	2.13"	.75"	1.38"
SCH16BTZ	BOOT	1"	3/4"	200	100	2.24"	.75"	1.38"
SCH20BTZ	BOOT	1-1/4"	1"	200	100	2.48"	.75"	1.18"
SCH24BTZ	BOOT	1-1/2"	1-1/4"	350	50	2.78"	.75"	1.2"
SCH32BTZ	BOOT	2"	1-1/2"	350	50	3.29"	.75"	1.2"
SCH40BTZ	BOOT	---	2"	350	50	3.46"	.75"	.93"
SCH48BTZ	BOOT	2-1/2"	2-1/2"	350	24	4"	.75"	.83"
SCH56BTZ	BOOT	3"	3"	350	25	4.57"	.75"	.75"
SCH64BTZ	BOOT	3-1/2"	3-1/2"	350	10	5.12"	.75"	.75"
SCH72BTZ	BOOT	4"	4"	350	10	5.67"	.75"	.75"


ROD/WIRE HANGERS



CABLE/CONDUIT TO WIRE CLIP



PCS1TZ



FEATURES
- Easy no-tool installation
- Attaches directly to drop wire with no additional bending

APPLICATION
- Provides support for cable and conduit from drop wire

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



c UL us LISTED


PART #	STATIC LOAD (LBS.)	EMT CONDUIT SIZE	MC/AC CABLE SIZE	WIRE SIZE	HOLE SIZE	BOX QTY.	A	B
PCS1TZ	25	---	14-2 – 10-3	#8 – #12	1/4"	100	3.11"	.748"
PCS2TZ	25	1/2" & 3/4"	10-3 – 6-3	#8 – #12	1/4"	100	3.52"	1"

CABLE/CONDUIT TO ROD/WIRE CLIP

PUSH-IN



4Z3412PTZ





FEATURES

- Clip rotates 360° for conduit positioning
- Flange clip provides stability to the conduit clip
- Easy no-tool installation

APPLICATION

- Cable/conduit to rod/wire clips easily install to flanges or rods to support conduit, cables and boxes
- Equipped with a rotatable joint, the conduit clip rotates 360° to position conduit in different directions

MATERIAL/FINISH

- Spring Steel/GEOSEAL™

CERTIFICATIONS

- UL Standard: UL 2239

c UL us LISTED

360°


PART #	FLANGE THICKNESS	EMT SIZE	RIGID SIZE	ROD SIZE	WIRE SIZE	BOX QTY.	A	B	C
4Z348PTZ	1/8" – 3/8"	1/2"	---	1/4"	#12	100	3.87"	1.57"	.748"
4Z3412PTZ	1/8" – 3/8"	3/4"	1/2"	1/4"	#12	100	3.87"	1.67"	.748"
4Z3416PTZ	1/8" – 3/8"	1"	3/4"	1/4"	#12	100	3.87"	1.95"	.748"
6Z348PTZ	3/8" – 7/16"	1/2"	---	3/8"	---	100	3.62"	1.46"	.748"
6Z3412PTZ	3/8" – 7/16"	3/4"	1/2"	3/8"	---	100	3.62"	1.67"	.748"
6Z3416PTZ	3/8" – 7/16"	1"	3/4"	3/8"	---	100	3.62"	1.95"	.748"


CABLE/CONDUIT TO ROD/WIRE CLAMP

SNAP-CLOSE



4Z346MTZ



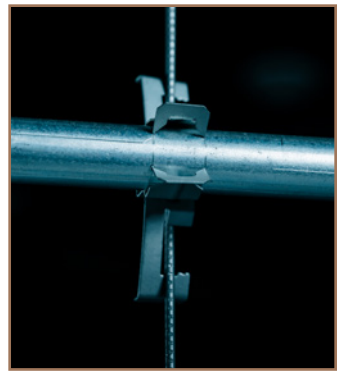

FEATURES

- Clip rotates 360° for conduit positioning
- Flange clip provides stability to the conduit clamp
- Easy no-tool installation

APPLICATION

- Cable/conduit to rod/wire clamps easily install to flanges or rods to support conduit, cables and boxes
- Equipped with a rotatable joint, the conduit clip rotates 360° to position conduit in different directions

MATERIAL/FINISH

- Spring Steel/GEOSEAL™

CERTIFICATIONS

- UL Standard: UL 2239

c UL us LISTED

360°

PART #	FLANGE THICKNESS	MC/AC CABLE SIZE	EMT SIZE	RIGID SIZE	ROD SIZE	WIRE SIZE	BOX QTY.	A	B	C
4Z346MTZ	1/8" – 3/8"	14-2 – 12-3	---	---	1/4"	#12	100	3.87"	1.68"	.748"
4Z3416MTZ	1/8" – 3/8"	---	1"	1"	1/4"	#12	100	3.87"	2.52"	.748"
4Z34812MTZ	1/8" – 3/8"	---	1/2" & 3/4"	1/2" & 3/4"	1/4"	---	100	3.87"	2.05"	.748"
6Z3416MTZ	3/8" – 7/16"	---	1"	1"	3/8"	#12	100	3.62"	2.52"	.748"
6Z34812MTZ	3/8" – 7/16"	---	1/2" & 3/4"	1/2" & 3/4"	3/8"	---	100	3.62'	2.05"	.748"

CABLE/CONDUIT TO ROD/WIRE CLIPS



K8TZ



K12TZ



K20TZ


c UL us LISTED

FEATURES
- Supports EMT, rigid, aluminum and NM conduit
- Spring Steel tightening feature keeps conduit and cables stable on rods or wire
- Easy no-tool installation


APPLICATION
- Cable/conduit to rod/wire no-tool installation clips are easily installed to flanges, rods, or wire to support conduit or cables.

MATERIAL/FINISH
- Spring Steel/GEOSEAL™


CERTIFICATIONS
- UL Standard: UL 2239



KXTZ



K8TZ



K16TZ





PART #	LOAD CAPACITY (LBS.) VERTICAL WIRE	HORIZONTAL FLANGE	VERTICAL FLANGE	A	B	C	BOX QTY.
KXTZ	---	---	---	2.71"	.782	.504"	100
K8TZ	50	100	15	2.90"	.815	.626"	100
K12TZ	50	100	15	4"	.839"	1"	100
K16TZ	50	100	15	4.53"	1.50"	.756"	100
K20TZ	50	100	22	5.59"	1.78"	.756"	100

CONDUIT DATA


CONDUIT SIZE	#10, #12 WIRE	#8, #9 WIRE	3/16", 1/4" ROD	1/8" – 1/4" FLANGE	5/16" – 3/8" FLANGE	7/16" – 1/2" FLANGE
1/2" EMT	K8TZ	K8TZ	K8TZ	K8TZ	K12TZ	K12TZ
1/2" RIGID	K8TZ	K12TZ	K12TZ	K12TZ	K12TZ	K16TZ
3/4" EMT	K12TZ	K12TZ	K12TZ	K12TZ	K16TZ	K16TZ
3/4" RIGID	K12TZ	K12TZ	K16TZ	K16TZ	K20TZ	K20TZ
1" EMT	---	K16TZ	K16TZ	K16TZ	K20TZ	K20TZ
1" RIGID	---	---	---	K20TZ	K20TZ	K20TZ
1-1/4" EMT	---	K20TZ	K20TZ	K20TZ	---	---

CABLE DATA

CABLE SIZE	#12 WIRE	#8, #9, #10 WIRE
14-2, 14-3, 12-2	KXTZ	KXTZ
12-3	KXTZ	K8TZ

CABLE HANGER





WMX6TZ

c UL us LISTED

PART #	HOOK DIAMETER	STATIC LOAD (LBS.)	A	B	C	BOX QTY.
WMX3TZ	1-1/8"	50	2.94"	1.08"	2.14"	100
WMX6TZ	1-3/4"	75	4.52"	1.34"	3.34"	100

FEATURES
- Supports cables from beam, wire and flange clips

APPLICATION
- Provides convenient cable management for MC/AC and data cables when used with other Southwire spring steel fasteners

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Standard: UL 2239



COMBINATION BOX/ CONDUIT HANGERS



BOX/CONDUIT HANGER




FEATURES
- Snap-close conduit clamps
- Center hole supports other Southwire fasteners attached to other structures


APPLICATION
- Conduit/box hangers are installed to drop wire, drop rod or other structures to support boxes in the center and conduit on either side

MATERIAL/FINISH
- Clamps: Spring steel
- Hangers: Galvanized steel
- GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239

c UL us LISTED

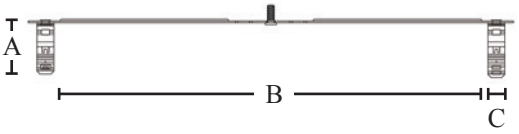

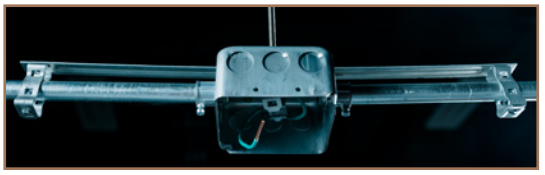


PART #	EMT SIZE	FMC SIZE	MC/AC CABLE SIZE	HOLE SIZE	HOLE TYPE
6MB18ATZ	---	3/8"	14-2 – 12-3	1/4"	PLAIN
16MB18ATZ	1"	---	---	1/4"	PLAIN
812MB18ATZ	1/2" & 3/4"	---	---	1/4"	PLAIN
812MB18STZ	1/2" & 3/4"	---	---	---	---

PART #	SCREW OPTION	SCREW LENGTH	THREAD SIZE	BOX QTY.	A	B	C
6MB18ATZ	NO	---	---	25	1.68"	18.11"	.63"
16MB18ATZ	NO	---	---	25	2.52"	18.11"	.63"
812MB18ATZ	NO	---	---	25	2.05"	18.11"	.63"
812MB18STZ	YES	9/16"	1/4" – 20	25	2.05"	18.11"	.63"

BOX/CONDUIT HANGER FROM ROD/WIRE



812MB18TZ





c UL us LISTED


PART #	BOX QTY.	A	B	C
812MB18TZ	25	18.11"	3.87"	1.92"

FEATURES
- Supports 1/2", 3/4" EMT
- Fits 1/4" Rod, #12 Wire

APPLICATION
- Supports conduit from wires or rods

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239

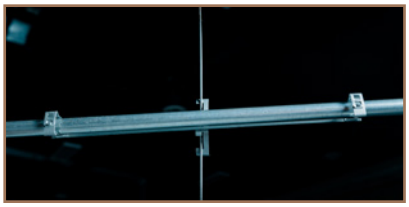

ADJUSTABLE BAR HANGER



BHA1

UL LISTED

PART #	JOIST OR STUD SPAN	BOX MOUNTING METHOD	MAX. RECOMMENDED STATIC FIXTURE SUPPORT (LBS.)	BOX QTY.
BHA1	16" TO 24"	BOX LOCK CLIP & THREADED STUD	13	50

FEATURES
- Box clip installs in 1/2" knockouts, located on the bottom of boxes
- Versatile design allows boxes to be installed anywhere along the length of the bar
- Not designed or intended for ceiling fan support
- Galvanized steel
- UL rated for 13 lbs. on 16" centers

APPLICATION
- Adjustable length box bar hangers can adjust from 16" through 24" and are designed for non-standard stud spacing
- These box supports are compatible with 1-1/2" and 2-1/8" deep boxes and are made of galvanized steel allowing for installation of electrical boxes anywhere along the length of the bar
- Box supports can accommodate 13 lbs. maximum load, can be used to install electrical boxes between ceiling joists or wall studs, and are suitable for fixtures or luminaires installation

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL rated for 13 lbs. on 16" centers


PIPE FITTINGS



ONE HOLE RIGID STRAP



531



c UL us LISTED

PART #	RIGID SIZE	BOX QTY.	A	B
531B	3/8"	100	1.81"	.562"
531	1/2"	50	1.91"	.625"
532	3/4"	50	2.21"	.75"
533	1"	25	2.57"	.875"
534	1-1/4"	20	2.79"	.88"
535	1-1/2"	20	3.69"	.899"
536	2"	10	4.17"	1.14"
517TZ*	2-1/2"	50	5"	1.28"
518TZ*	3"	25	5.55"	1.28"
519*	3-1/2"	25	6.37"	1.28"
520*	4"	25	6.87"	1.28"

*EMT and Rigid

FEATURES
- Snap-on Rigid strap with one hole
- Greater load bearing capability
- Easy to install

APPLICATION
- Indoor or outdoor, use to secure EMT, Rigid or IMC conduit to wood, masonry or wherever greater load bearing is required

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIONS
- UL Standard: UL 2239
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014



ONE HOLE RIGID STRAP
316 STAINLESS STEEL



OHSSR-50

UL LISTED



PART #	RIGID SIZE	BOX QTY.
OHSSR-25	1/4"	100
OHSSR-38	3/8"	100
OHSSR-50	1/2"	100
OHSSR-75	3/4"	100
OHSSR-100	1"	50
OHSSR-125	1-1/4"	50
OHSSR-150	1-1/2"	25

FEATURES
- Snap-on feature
- Inverted rib provides strength to keep cable secure
- 2-1/2" through 4" suitable for EMT conduit

APPLICATION
- Use to secure Rigid/IMC conduit in surface mount applications


MATERIAL/FINISH
- 316 Stainless steel

CERTIFICATIONS
- UL Listed (1/2" through 2")

ONE HOLE EMT STRAP



511



c UL us LISTED

FEATURES
- Snap-on EMT strap with one hole
- Inverted rib for strength
- Easy no-tool installation

APPLICATION
- Indoor or outdoor, use to support EMT conduit to wood, masonry or where greater load bearing is required

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIONS
- UL Standard: UL 2239
- Fed. Spec: W-F-406E, W-F-406D
- NEMA: FB 1-2014

PART #	EMT SIZE	BOX QTY.	A	B
511	1/2"	100	1.79"	.57"
EPS0075EGTZ	3/4"	50	1.96"	.62"
EPS0100EGTZ	1"	25	2.25"	.75"
EPS0125EGTZ	1-1/4"	20	2.85"	.88"
EPS0150EGTZ	1-1/2"	20	3.16"	.99"
EPS0200EGTZ	2"	10	3.93"	1.10"
517TZ*	2-1/2"	50	5"	1.28"
518TZ*	3"	25	5.55"	1.28"
519*	3-1/2"	25	6.37"	1.28"
520*	4"	25	6.87"	1.28"

*EMT and Rigid




ONE HOLE EMT STRAP

316 STAINLESS STEEL



OHSS-38

LISTED



FEATURES
- Snap-on feature
- Inverted rib provides strength to keep cable secure

APPLICATION
- Use to secure EMT conduit in surface mount applications

MATERIAL/FINISH
- 316 Stainless steel

CERTIFICATIONS
- UL Listed (1/2" through 4")

PART #	EMT SIZE	BOX QTY.
OHSS-38	3/8"	100
OHSS-50	1/2"	50
OHSS-75	3/4"	50
OHSS-100	1"	25
OHSS-125	1-1/4"	25
OHSS-150	1-1/2"	25
OHSS-200	2"	25
OHSS-250	2-1/2"	10
OHSS-300	3"	10
OHSS-350	3-1/2"	10
OHSS-400	4"	10

ONE HOLE STRAP

FOR RIGID/IMC CONDUIT



OHSR-38M

LISTED

FEATURES
- Heavy-duty casting

APPLICATION
- Use to secure Rigid/IMC conduit in surface mount applications

MATERIAL/FINISH
- Malleable iron/Zinc plated

CERTIFICATIONS
- cULus Listed

PART #	RIGID SIZE	INNER QTY.	MASTER QTY.
OHSR-38M	3/8"	---	50
561	1/2"	25	250
562	3/4"	25	250
563	1"	25	125
564	1-1/4"	20	100
565TZ	1-1/2"	10	100
566	2"	10	50
567	2-1/2"	5	25
568TZ	3"	---	5
569	3-1/2"	---	5
570	4"	---	5
570A	5"	---	2
570B	6"	---	2

ONE HOLE RIGID CLAMP BACK SPACER



481

c UL us LISTED

FEATURES
- For use with malleable or aluminum straps

APPLICATION
- Use to provide space between conduit and mounting surface

MATERIAL/FINISH
- Malleable iron/Zinc plated

CERTIFICATIONS
- cULus Listed

PART #	RIGID SIZE	INNER QTY.	MASTER QTY.
481	1/2"	25	250
482	3/4"	25	250
483	1"	25	125
484	1-1/4"	20	100
485	1-1/2"	10	100
486	2"	10	50
487	2-1/2"	5	25
488	3"	N/A	10
489	3-1/2"	N/A	10
489A	4"	N/A	10
489B	5"	N/A	2
489C	6"	N/A	2

UNIVERSAL PVC CLAMP BACK SPACER





CLBU

FEATURES
- Stackable to elevate surface conduit
- Fits 1/2", 3/4", or 1" conduits
- Will not rust of corrode

APPLICATION
- Stackable to elevate surface conduit

MATERIAL/FINISH
- Zinc finish

PART #	SIZE	MASTER QTY.
CLBU	1/2" - 1"	50

ONE HOLE SE/SEU STRAP



232A

FEATURES
- Wide wire range
- Stamped aluminum

APPLICATION
- Use to secure SE & SEU service entrance cable in surface mount applications

MATERIAL/FINISH
- Aluminum

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
232A	3 #3 OR #2	100	1000
282A	3 #1/0 OR #2/0	25	250
284A	3 #3/0 OR #4/0	20	100

ONE HOLE NM STRAP



510RX

FEATURES
- Inverted rib provides strength to keep cable secure

APPLICATION
- Use to secure Romex® Brand nonmetallic sheathed cable in surface mount applications

MATERIAL/FINISH
- Steel/Zinc plated

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
510RX	14, 12, 10 IN 2 OR 3 CONDUCTOR, WITH OR WITHOUT GROUND. ALSO 14 IN UF	100	1000

TWO HOLE SE/SEU STRAP



506

FEATURES
- Inverted rib provides strength to keep cable secure
- Snap-on Rigid strap with two holes

APPLICATION
- Use to secure SE & SEU service entrance cable in surface mount applications

MATERIAL/FINISH
- Steel/Galvanized

PART #	FOR WIRE SIZES	INNER QTY.	MASTER QTY.
501	3 #8, 6, 4	100	1000
502	3 #3, 2	100	1000
503	3 #1, 1/0, 2/0	25	250
504	3 #3/0, 4/0	25	250
506	3 #8 OR #6	100	500
507	3 # 4 OR #3	100	500
508	#1/0 OR #2/0	25	250
509	#4/0	20	100

TWO HOLE EMT STRAP

ZINC PLATED STEEL



THS-25

PART #	EMT SIZE	BOX QTY.
THS-25	1/4"	50
THS-38	3/8"	50
521TZ	1/2"	500
522	3/4"	500
523	1"	250
524	1-1/4"	50
525	1-1/2"	50
526	2"	50
527	2-1/2"	50
528TZ	3"	25
529TZ	3-1/2"	25
530TZ	4"	20

FEATURES
- Snap-on EMT strap with two holes
- Inverted rib provides strength to keep cable secure
- Easy to install

APPLICATION
- Use to secure EMT conduit in surface mount applications

MATERIAL/FINISH
- Steel/Zinc plated

316 STAINLESS STEEL



THSS-38

UL LISTED

PART #	EMT SIZE	BOX QTY.
THSS-38	3/8"	50
THSS-50	1/2"	50
THSS-75	3/4"	50
THSS-100	1"	25
THSS-125	1-1/4"	25
THSS-150	1-1/2"	25
THSS-200	2"	25
THSS-250	2-1/2"	25
THSS-300	3"	10
THSS-350	3-1/2"	10
THSS-400	4"	10

FEATURES
- Snap-on EMT strap with two holes
- Inverted rib provides strength to keep cable secure
- Easy to install

APPLICATION
- Use to secure EMT conduit in surface mount applications

MATERIAL/FINISH
- Steel/316 Stainless steel

CERTIFICATIONS
- UL Listed

TWO HOLE RIGID STRAP



THSSR-50

FEATURES

- Inverted rib provides strength to keep cable secure
- Snap-on Rigid strap with two holes

APPLICATION

- Indoor or outdoor, use to secure EMT, Rigid or IMC conduit to wood, masonry or where greater load bearing is required

CERTIFICATIONS

- cULus Listed (except 123)
- UL Listed (for THSSR 1/2" THROUGH 2")

PART #	MATERIAL	RIGID SIZE	INNER QTY	BOX QTY.
123	ZINC PLATED STEEL	3/8"	100	500
541		1/2"	100	500
542		3/4"	50	250
543		1"	25	125
544	ZINC PLATED STEEL	1-1/4"	---	50
545		1-1/2"	---	50
546		2"	---	50
527		2-1/2"	---	50
528TZ		3"	---	25
529TZ		3-1/2"	---	25
530TZ		4"	---	20
530A		5"	---	10
530B		6"	---	10
THSSR-50	316 STAINLESS STEEL	1/2"	---	50
THSSR-75		3/4"	---	50
THSSR-100		1"	---	25
THSSR-125		1-1/4"	---	25
THSSR-150		1-1/2"	---	25
THSSR-200		2"	---	25
THSSR-250		2-1/2"	---	25
THSSR-300		3"	---	10
THSSR-350		3-1/2"	---	10
THSSR-400		4"	---	10

STRUCTURAL ATTACHMENTS

Solutions to attach and support electrical networks from building structures

BEAM/PURLIN

ROD/WIRE FASTENERS


FASTENERS/HARDWARE

BEAM/PURLIN



HAMMER-ON FLANGE CLIP



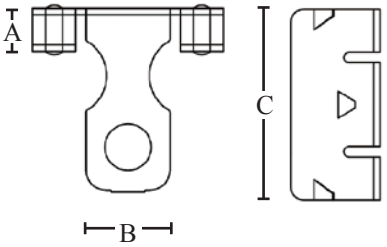

2H4TZ

c UL us LISTED

PART #	FLANGE SIZE	STATIC LOAD (LBS.)	BOX QTY.	A	B	C
2H4TZ	3/32" – 9/64"	160	100	.26"	.496"	1.13"
4H24TZ	1/8" – 1/4"	200	100	.37"	.512"	1.26"
4H58TZ	5/16" – 1/2"	200	100	.606"	.512"	1.26"
4H912TZ	9/16" – 3/4"	200	100	.866"	.512"	1.26"

FEATURES
- Hammer-on installation
- Provides 1/4" hanger hole
- Side mount

APPLICATION
- Provides an attachment solution to beam flanges for wire, hooks, and chains

MATERIAL/FINISH
- Spring Steel/GEOSEAL™


CERTIFICATIONS
- UL Standard: UL 2239



FLANGE MOUNT THREADED ROD SUPPORT



4TI58TZ

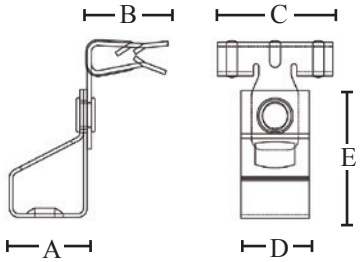

c UL us LISTED

FEATURES
- Rotatable joint ensures rod maintains a vertical position
- Hammer-on installation

APPLICATION
- Supports 1/4" hole threaded rods from beams with flange clip

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239




PART #	FLANGE THICKNESS	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D	E
4TI24TZ	1/8" – 1/4"	200	100	.85"	.866"	1.26"	.748"	1.48"
4TI58TZ	5/16" – 1/2"	200	100	.85"	.866"	1.26"	.748"	1.48"
4TI912TZ	9/16" – 3/4"	200	100	.85"	.866"	1.26"	.748"	1.48"

DECK ROD HANGER



DH6TITZ



c UL us LISTED

FEATURES
- Supports 3/8" threaded rods

APPLICATION
- Attaches to deck tab to support threaded rods

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239




PART #	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D
DH6TITZ	160	100	4.90"	1.49"	.85"	.748"

FLANGE MOUNT PLAIN ROD SUPPORT



6A24TZ



c UL us LISTED

FEATURES
- Rotatable joint ensures rod maintains a vertical position
- Hammer-on installation
- Rod size 3/8"

APPLICATION
- Supports plain rods from beams with flange clip

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239



PART #	FLANGE SIZE	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D	E
6A24TZ	1/8" – 1/4"	200	100	2.12"	.157"	.886"	1.26"	.748"
6A912TZ	9/16" – 3/4"	200	100	2.12"	.568"	.886"	1.26"	.748"

"Z" PURLIN ROD CLAMP



AF146TITZ



1224TITZ






c UL us LISTED

FEATURES
- Designed to fit angle purlin flanges
- Rotatable joint ensures rod position maintains a vertical direction
- Hammer-on installation

APPLICATION
- Conforms to the angle of purlin to suspend plain or threaded rods

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239

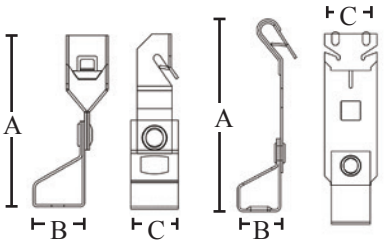


PART #	FLANGE SIZE	MOUNTING OPTION	ROD SIZE	HOLE TYPE	BOX QTY.	A	B	C
1224TITZ	3/32" MAX	SIDE	1/4"	THREADED	100	3.28"	.85"	.748"
1226TITZ	3/32" MAX	SIDE	3/8"	THREADED	100	3.28"	.85"	.748"
AF144TITZ	1/16" – 1/4"	FRONT	1/4"	THREADED	100	4.30"	.827"	1"
AF146TTZ	1/16" – 1/4"	FRONT	3/8"	PLAIN	100	4.30"	.827"	1"
AF146TITZ	1/16" – 1/4"	FRONT	3/8"	THREADED	100	4.30"	.827"	1"

"Z" PURLIN CLIP



122TZ



FEATURES
- 1/4" support hole
- Hammer-on installation
- Side mount
- 3/32" max flange thickness

APPLICATION
- Conforms to the angle of purlin to support wire, chains, and hooks.

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239



c UL us LISTED

PART #	BOX QTY.	A	B	C
122TZ	100	1.88"	.551"	.709"

ANGLED PURLIN STRAP HANGER



MSR122TZ



MSS122TZ




FEATURES
- Hammer-on installation
- 3/32" max flange thickness
- 1-1/4" max strap width

APPLICATION
- Conforms to the angle of purlin to support pipe, ducts, and other attachments with straps

MATERIAL/FINISH
- Spring Steel/GEOSEAL™
- Steel/Galvanized

CERTIFICATIONS
- UL Standard 2239

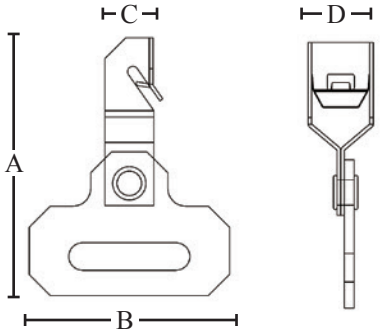


c UL us LISTED

PART #	STRAP DIRECTION TO BEAM	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D
MSS122TZ	PARALLEL	100	50	2.49"	2.24"	.539"	.708"
MSR122TZ	RT. ANGLE	100	50	3.19"	2.24"	.709"	.709"

CONDUIT TO PURLIN CLAMP



123812MTZ



c UL us LISTED

PART #	BOX QTY.	A	B	C	D
123812MTZ	100	2.05"	1.49"	.709"	.630"

FEATURES
- Hammer-on installation
- Snap-close conduit clamp pivots 360° for easy positioning
- Supports 1/2" and 3/4" EMT
- 3/32" max flange

APPLICATION
- Supports EMT and Rigid conduit from angled purlins

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239

CONDUIT TO BEAM CLIPS


BOTTOM MOUNT



BC12PTZ

c UL us LISTED

360°



PART #	EMT SIZE	FLANGE SIZE	THREAD HOLE SIZE	LOAD CAPACITY (LBS.)
BC8PTZ	1/2"	1/2"	10 – 24 & 1/4" – 20	100
BC12PTZ	3/4"	1/2"	10 – 24 & 1/4" – 20	100
CHP-100-TM	1"	1/2"	10 – 24 & 1/4" – 20	100

PART #	BOX QTY.	A	B	C	D
BC8PTZ	100	1.18"	1.42"	1.46"	.748"
BC12PTZ	100	1.18"	1.42"	1.67"	.748"
CHP-100-TM	50	1.18"	1.42"	2.37"	.748"

FEATURES
- Riveted conduit hanger rotates 360° to accommodate various directions of conduit
- Light-duty beam clamp provides a 25 lbs. static load capacity
- Additional 10 – 24 and 1/4"– 20 mounting holes on beam clamp

APPLICATION
- Push-in conduit hanger/beam clip assemblies are used when EMT or Rigid conduit must be supported below a structural beam


MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239



CONDUIT TO BEAM CLIPS

SIDE MOUNT

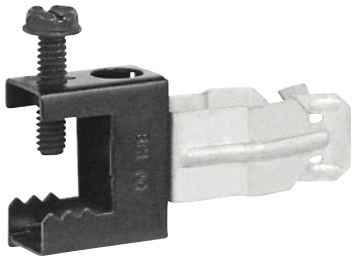

CHP-50-SM

360°

FEATURES

- Riveted conduit hanger rotates 360° to accommodate various directions of conduit, perpendicular to beam edge
- Light-duty beam clamp provides a 25 lbs. static load capacity
- Additional 10-24 and 1/4"-20 mounting holes on beam clamp

APPLICATION

- Push-in conduit hanger/beam clip assemblies are used when EMT or Rigid conduit must be attached below a structural beam

MATERIAL/FINISH

- Spring Steel


PART #	EMT	FLANGE SIZE	BOX QTY.
CHP-50-SM	1/2"	1/2"	50
CHP-75-SM	3/4"	1/2"	50
CHP-100-SM	1"	1/2"	50

CONDUIT BEAM CLAMP

BOTTOM MOUNT



BC16MTZ



c UL us LISTED

FEATURES

- Snap-close clip to secure conduit
- 1/2" max flange size

APPLICATION

- Snap-close conduit hanger/beam clamp assemblies are used when EMT or Rigid conduits must be supported below a structural beam

MATERIAL/FINISH

- Spring Steel/GEOSEAL™

CERTIFICATIONS

- UL Standard 2239

PART #	CONDUIT SIZE	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D
BC812MTZ	1/2" OR 3/4"	100	100	1.42"	1.18"	2.05"	.63"
BC16MTZ	1"	100	100	1.42"	1.18"	2.52"	.63"
BC20MTZ	1-1/4"	100	100	1.42"	1.18"	2.96"	.63"
BC24MTZ	1-1/2"	100	50	1.42"	1.18"	3.18"	.63"
BC32MTZ	2"	100	50	1.42"	1.18"	3.88"	.63"




CONDUIT BEAM CLAMP

SIDE MOUNT



BC16MSMTZ

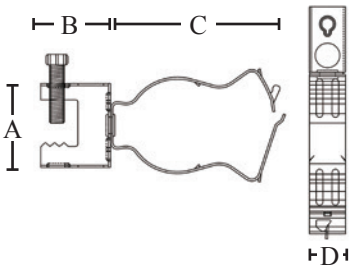

FEATURES
- Snap-close clip to secure conduit
- 1/2" max flange size

APPLICATION
- Snap-close conduit hanger/beam clamp assemblies are used when EMT or Rigid conduits must be supported to a structural beam

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239

c UL us LISTED


PART #	CONDUIT SIZE	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D
BC812MSMTZ	1/2" OR 3/4"	25	100	1.42"	1.18"	2.05"	.63"
BC16MSMTZ	1"	25	100	1.42"	1.18"	2.52"	.63"
BC20MSMTZ	1-1/4"	25	100	1.42"	1.18"	2.96"	.63"
BC24MSMTZ	1-1/2"	25	50	1.42"	1.18"	3.18"	.63"
BC32MSMTZ	2"	25	50	1.42"	1.18"	3.88"	.63"



FLANGE CLIP WITH STUD



M912STZ

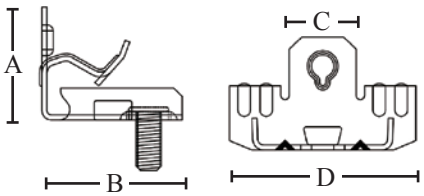

FEATURES
- Hammer-on installation
- 1/4"-20 Threaded stud; 3/8" length
- Accommodates 1/4" size rod
- Bottom mount

APPLICATION
- Attaches to beam flanges to support rods or straps
- Threaded stud feature provides support for outlet boxes

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239

c UL us LISTED

PART #	FLANGE THICKNESS	LOAD CAPACITY (LBS.) VERTICAL ROD	HORIZONTAL ROD	VERTICAL STRAP
M24STZ	1/8" – 1/4"	100	25	75
M58STZ	5/16" – 1/2"	100	25	75
M912STZ	9/16" – 3/4"	100	25	75


PART #	BOX QTY.	A	B	C	D
M24STZ	100	1.06"	1.32"	.630"	1.75"
M58STZ	100	1.34"	1.36"	.630"	1.75"
M912STZ	100	1.63"	1.46"	.630"	1.75"



THREADED ROD FLANGE CLIP SUPPORT



M912TZ

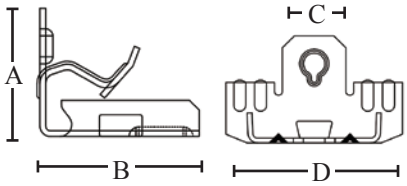

c UL us LISTED

FEATURES
- Hammer-on installation
- Accommodates 1/4" rod size
- Bottom mount

APPLICATION
- Attaches to beam flanges to support rods, boxes, fixtures, or other necessary attachments

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239

PART #	FLANGE THICKNESS	LOAD CAPACITY (LBS.) VERTICAL ROD	HORIZONTAL ROD	VERTICAL STRAP
M24TZ	1/8" – 1/4"	100	25	75
M58TZ	5/16" – 1/2"	100	25	75
M912TZ	9/16" – 3/4"	100	25	75

PART #	BOX QTY.	A	B	C	D
M24TZ	100	1.06"	1.32"	.63"	1.75"
M58TZ	100	1.34"	1.36"	.63"	1.75"
M912TZ	100	1.63"	1.46"	.63"	1.75"



STRAP HANGER FLANGE CLIP



MSS912TZ



MSR58TZ




FEATURES
- Hammer-on installation
- Strap width 1-1/4" max

APPLICATION
- Attaches to beam flange to support pipes, ducts, or other attachments with straps.


MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239

c UL us LISTED



PART #	FLANGE SIZE	STRAP DIRECTION TO BEAM	STATIC LOAD (LBS.)
MSS24TZ	1/8" – 1/4"	PARALLEL	200
MSS58TZ	5/16" – 1/2"	PARALLEL	200
MSS912TZ	9/16" – 3/4"	PARALLEL	200
MSR58TZ	5/16" – 1/2"	RIGHT ANGLE	200



PART #	BOX QTY.	A	B	C	D
MSS24TZ	50	2.19"	.886"	1.60"	2.24"
MSS58TZ	50	2.46"	.886"	1.60"	2.24"
MSS912TZ	50	2.70"	.886"	1.60"	2.24"
MSR58TZ	50	2.77"	.866"	1.26	2.24

VERTICAL ANGLED FLANGE HANGER



VF14TZ




FEATURES
- Fits purlin and bar joists with 1/16" to 1/4" flange
- 1/4" Hole size

APPLICATION
- Use to support wire, chains, and S-hooks from vertical purlins
- Hammer-on installation

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239

c UL us LISTED



PART #	BOX QTY.	A	B	C
VF14TZ	100	2.94"	1"	.354"

ANGLE FLANGE HANGER



AF14TZ




FEATURES
- Supports flanges from 1/16" to 1/4"
- 1/4" support hole
- Hammer-on installation

APPLICATION
- Designed to hang from angle purlin to provide support for wires, chains, and hooks

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard 2239




PART #	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D
AF14TZ	100	100	2.91"	1"	.701"	.486"

6-1/4" WIDE MOUTH BEAM CLAMP

LIGHT-DUTY



BC-1420-XWM

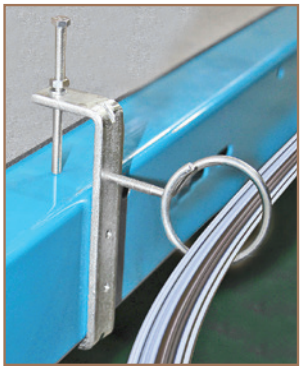

FEATURES
- 1/4"-20 thread impressions
- Stamped steel

APPLICATION
- Light duty beam clamp supports loads from structural beams

MATERIAL/FINISH
- Steel

PART #	JAW	HOLE THREAD	BOX QTY.
BC-1420-XWM	6-1/4"	1/4"-20	20

CONDUIT HANGER WITH STEEL BEAM CLAMP ASSEMBLY



CHBC-50

360°

FEATURES
- Riveted conduit hanger rotates 360° to accommodate various directions of conduit
- Stamped steel construction and hardened set screw provides a 100 lbs. static load capacity
- Additional 1/4" – 20 mounting hole on back of beam clamp

APPLICATION
- Conduit hanger/beam clamp assemblies are used when EMT or Rigid conduit must be supported below a structural beam

MATERIAL/FINISH
- Zinc plated

PART #	FOR EMT SIZE	FOR RIGID SIZE	BOX QTY.
CHBC-50	1/2"	1/2"	50
CHBC-75	3/4"	3/4"	50
CHBC-100	1"	1"	50
CHBC-125	1-1/4"	---	50
CHBC-150	1-1/2"	1-1/4"	50
CHBC-175	---	1-1/2"	50
CHBC-200	2"	2"	50

BEAM CLAMP

316 STAINLESS STEEL



MBC-3816-SS

FEATURES
- Tapped holes on side and bottom

APPLICATION
- Stainless steel beam clamps are used to support conduit hangers, bridle rings and drop rods in harsh environments where corrosion is an issue


MATERIAL/FINISH
- Body and Set Screw: Steel/316 Stainless

PART #	FLANGE THICKNESS	SIDE/BOTTOM THREADED HOLES	STATIC LOAD (LBS)	BOX QTY.
MBC-1420-SS	3/8"	1/4" – 20	250	50
MBC-3816-SS	3/8"	3/8" – 16	500	25

BEAM CLAMPS



BC-1024



FEATURES
- Side and bottom tapped holes

APPLICATION
- Light duty beam clamp supports loads from structural beams

CERTIFICATIONS
- UL listed or cULus Listed




PART #	MATERIAL	ROD SIZE	JAW OPENING	BOX QTY.	A	B	C
BC-1024*	ZINC PLATED STEEL	10 – 24	.59"	100	.92"	1.40"	1.63"
BC200TZ**		1/4" – 20	.59"	100	.92"	1.40"	1.63"
BC400TZ**		3/8" – 16	.94"	50	1.21"	2.062"	2.25"
BC-1420-SS*	316 STAINLESS STEEL	1/4" – 20	.59"	100	.92"	1.40"	1.63"
BC-3816-SS*		3/8" – 16	.94"	25	1.21"	2.062"	2.25"

* UL listed | ** cULus listed

STEEL



BCTZ




FEATURES
- Supports flanges up to 1/2"
- Holes in the back #10-24 and 1/4"-20, Holes on the bottom 1/4"-20

APPLICATION
- Clamps to flanges to support a variety of attachments from beams.

MATERIAL/FINISH
- Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



PART #	STATIC LOAD (LBS.)	BOX QTY.	A	B	C
BCTZ	100	100	1.42"	1.18"	.63"

BEAM CLAMPS

MALLEABLE IRON



26

LISTED

FEATURES
- Tapped holes on side and bottom

APPLICATION
- Malleable iron beam clamps are used to support conduit hangers, bridle rings and drop rods

MATERIAL/FINISH
- Malleable iron/Zinc plated

CERTIFICATIONS
- UL Listed, CSA Listed

PART #	SIZE	JAW OPENING	SIDE/BOTTOM THREADED HOLES	STATIC LOAD (LBS.)	BOX QTY.
26	1"	3/4"	1/4"-20	450	50
27	2"	7/8"	3/8"-16	1300	10
29	2-1/2"	1-3/16"	1/2"-13	1700	10

SLIM-BODY - MALLEABLE IRON



MBC-3816EV

LISTED

FEATURES
- Tapped holes on side and bottom

APPLICATION
- Malleable iron beam clamps are used to support conduit hangers, bridle rings and drop rods

MATERIAL/FINISH
- Malleable iron/Zinc plated

CERTIFICATIONS
- UL Listed*

PART #	JAW OPENING	ROD SIZE	STATIC LOAD (LBS.)	BOX QTY.
MBC-3816EV*	3/4"	3/8"	900	50
122**	3/4"	1/4" – 20	125	50
123A**	3/4"	3/8" – 16	300	50
123TZ**	7/8"	3/8" – 16	300	50
MBC-1420	7/8"	1/4" – 20	450	50
MBC-3816	1 1/8"	3/8" – 16	1300	25
124TZ**	1-1/8"	1/2"- 13	600	25
MBC-1213	1 3/8"	1/2"- 13	1700	10

* UL listed | ** No UL

BEAM CLAMPS

WIDE MOUTH



MBC-14020WM



FEATURES
- Tapped holes on side and bottom

APPLICATION
- Wide-mouth malleable iron beam clamps are used with large flange beams to support conduit hangers, bridle rings and drop rods

MATERIAL/FINISH
- Iron/Zinc plated

CERTIFICATIONS
- UL Listed

PART #	JAW OPENING	SIDE/BOTTOM THREADED HOLES	STATIC LOAD (LBS.)	BOX QTY.
MBC-1420WM	3-1/8"	1/4"-20	200	50
MBC-3816WM	3-1/8"	3/8"-16	300	25
MBC-1213WM	3-1/8"	1/2"-13	400	10

HEAVY-DUTY BODY, MALLEABLE IRON



MBC-1024



FEATURES
- Tapped holes on side and bottom

APPLICATION
- Malleable iron beam clamps are used to support conduit hangers, bridle rings and drop rods

MATERIAL/FINISH
- Malleable iron/Zinc plated


CERTIFICATIONS
- UL Listed

PART #	JAW OPENING	HOLE THREAD	STATIC LOAD (LBS.)	BOX QTY.
MBC-1213XL	31/32"	1/2"-13	1700	50
MBC-1024	7/8"	10"- 24	250	100

UNIVERSAL BEAM CLAMP



3000037EGTZ



FEATURES
- Electrogalvanized coating for corrosion protection
- Threaded rod attaches vertically from back of clamp

APPLICATION
- Provides a connection point for threaded rods or bridle rings from beam flange

MATERIAL/FINISH
- Malleable iron

CERTIFICATIONS
- UL Standard: UL 2239

PART #	FLANGE THICKNESS	ROD SIZE	MOUNT LOAD (LBS.)	BOX QTY.	A	B	C	D
3000037EGTZ	3/4"	3/8"	300	100	1.60"	1.88"	1.79"	.792
3000050EGTZ	3/4"	1/2"	300	100	1.64"	1.70"	1.78"	1.04
3000062EGTZ	3/4"	5/8"	300	50	1.85"	1.84"	1.82"	1.18
3000075EGTZ	3/4"	3/4"	300	50	1.87"	2.29"	2.12"	1.31
3100037EGTZ	1-1/4"	3/8"	300	50	2.03"	1.67"	2.31"	.948
3100050EGTZ	1-1/4"	1/2"	300	50	2.10"	1.67"	2.33"	1.02



BEAM CLAMP, REVERSIBLE

MALLEABLE IRON



3000037PLTZ

FEATURES
- Through-hole in beam clamps allows drop rod length adjustment
- Hardened cup point set screws come with jam nuts to prevent vibratory loosening in industrial settings

APPLICATION
- Reversible beam clamps are used when drop rod length needs to be adjusted to accommodate the field installation finished height

MATERIAL/FINISH
- Malleable iron/Unfinished (black)

CERTIFICATIONS
- UL Listed or cULus listed

PART #	JAW OPENING	ROD SIZE	STATIC LOAD (LBS.) TOP MOUNT	STATIC LOAD (LBS.) BOTTOM MOUNT	BOX QTY.
3000037PLTZ**	3/4"	3/8"	300	---	100
MFC-3816	1-1/4"	3/8" – 16	500	250	25
MFC-1213	1-1/4"	1/2" – 13	500	250	25
MFC-5811*	1-3/8"	5/8" – 11	750	400	25
MFC-3410*	1-3/8"	3/4" – 10	1000	600	25

* UL listed | ** cULus listed



LIGHT DUTY BEAM CLAMP, REVERSIBLE

MALLEABLE IRON



JFC-1420

UL LISTED

PART #	JAW OPENING	HOLE THREAD	STATIC LOAD (LBS.) TOP MOUNT	STATIC LOAD (LBS.) BOTTOM MOUNT	BOX QTY.
JFC-1420	3/4"	1/4 – 20	250	100	50
JFC-3816	3/4"	3/8 – 16	500	250	25
JFC-1213	3/4"	1/2 – 13	500	250	25
JFC-5811	7/8"	5/8 – 11	750	400	25

FEATURES
- Through-hole in beam clamps allows drop rod length adjustment
- Hardened cup point set screws come with jam nuts to prevent vibratory loosening in industrial settings

APPLICATION
- Reversible beam clamps are used when drop rod length needs to be adjusted to accommodate the field installation finished height

MATERIAL/FINISH
- Malleable iron/Zinc plated

CERTIFICATIONS
- UL Listed

BEAM CLAMP/ROD-HANGER



126TZ

PART #	MATERIAL	JAW OPENING	BOTTOM MOUNTING HOLE THREAD	BOX QTY.
126TZ	ZINC PLATED STEEL	3/4"	3/8 – 16	25
SCC-1213		3/4"	1/2 – 13	25
SCC-5811		3/4"	5/8 – 11	25
SCC-3410		3/4"	3/4 – 10	25
SCC-3816SS	304 STAINLESS STEEL	3/4"	3/8 – 16	25
SCC-1213SS		3/4"	1/2 – 13	25
SCC-5811SS		3/4"	5/8 – 11	25
SCC-3410SS		3/4"	3/4 – 10	25
SCC-3816BK	UNFINISHED (BLACK) STEEL	3/4"	3/8 – 16	25
SCC-1213BK		3/4"	1/2 – 13	25
SCC-5811BK		3/4"	5/8 – 11	25
SCC-3410BK		3/4"	3/4 – 10	25

FEATURES
- Formed steel construction

APPLICATION
- C-style rod hanger clamps are used as structural attachments to metal beams, purlins, channels and angle irons to support boxes, enclosures and fixtures from threaded rods

MATERIAL/FINISH
- Steel/Electroplated zinc or 304 Stainless steel



BEAM CLAMP/ROD-HANGER

MALLEABLE IRON



MCC-3816

FEATURES

- For vertical loads


APPLICATION

- C-style rod hanger clamps are used as structural attachments to metal beams, purlins, channels and angle irons to support boxes, enclosures and fixtures from threaded rods

MATERIAL/FINISH

- Malleable iron/Zinc plated or unfinished

PART #	MATERIAL	JAW OPENING	HOLE THREAD	BOX QTY.
MCC-3816	ZINC PLATED IRON	3/4"	3/8 – 16	25
MCC-1213		3/4"	1/2 – 13	25
MCC-5811		3/4"	5/8 – 11	25
MCC-3410		3/4"	3/4 – 10	25
MCC-3816BK	UNFINISHED (BLACK) IRON	3/4"	3/8 – 16	25
MCC-1213BK		3/4"	1/2 – 13	25
MCC-5811BK		3/4"	5/8 – 11	25
MCC-3410BK		3/4"	3/4 – 10	25

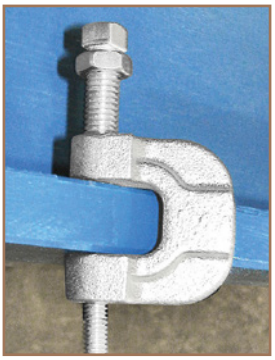


BEAM CLAMP

PARALLEL EDGE



1561HDG



FEATURES
- Hot dip galvanized over malleable iron for added durability and corrosion protection

APPLICATION
- Parallel beam conduit clamps are used to mount EMT, rigid, or IMC conduit parallel to beam, channel and angle supports

MATERIAL/FINISH
- Malleable iron/Hot dip galvanized


CERTIFICATIONS
- UL Listed: UL Standard 2239

PART #	SIZE	BOX QTY.	A	B
1561HDG	1/2"	50	2.80"	1.42"
1562HDG	3/4"	50	2.99"	1.47"
1563HDG	1"	50	3.19"	1.54"
1564HDG	1-1/4"	25	3.39"	2.01"
1565HDG	1-1/2"	25	3.62"	2.01"
1566HDG	2"	25	4.37"	2.87"
1567HDG	2-1/2"	10	5.12"	3.23"
1568HDG	3"	10	5.79"	4.06"
1569HDG	3-1/2"	10	6.26"	4.53"
1570HDG	4"	10	6.46"	4.61"

CROSS BEAM EDGE



1571HDG



FEATURES
- Malleable iron construction

APPLICATION
- Beam edge conduit clamps are used to mount EMT or rigid conduit perpendicular to beam, channel and angle supports

MATERIAL/FINISH
- Malleable iron/Hot dip galvanized

PART #	SIZE	BOX QTY.	A	B
1571HDG	1/2"	50	2.10"	2.72"
1572HDG	3/4"	50	2.44"	3.01"
1573HDG	1"	50	2.57"	3.23"
1574HDG	1-1/4"	25	2.96"	3.47"
1575HDG	1-1/2"	25	3.27"	3.65"
1576HDG	2"	25	3.85"	4.36"
1577HDG	2-1/2"	10	4.40"	5.05"
1578HDG	3"	10	5.08"	5.41"

BEAM CLAMP

J-STYLE UNDER BEAM



JCL50

FEATURES
- Zinc plated malleable iron construction provides a secure and durable connection

APPLICATION
- J-style conduit beam clamps are used with metallic conduit
- Clamp allows conduit to be clamped to the parallel or perpendicular 90° to the beam

MATERIAL/FINISH
- Malleable iron/Zinc plated




PART #	SIZE	BOX QTY.
JCL50	1/2"	50
JCL75	3/4"	50
JCL100	1"	25
JCL125	1-1/4"	25
JCL150	1-1/2"	25
JCL250	2-1/2"	5
JCL350	3-1/2"	1

RIGHT ANGLE UNDER BEAM - MALLEABLE IRON



1551HDG



FEATURES
- Hot dip galvanized over malleable iron for added durability and corrosion protection

APPLICATION
- Right angle conduit clamps are used to mount EMT or rigid conduit across, parallel, or perpendicular to beam, channel or angle supports

MATERIAL/FINISH
- Malleable iron/Hot dip galvanized

CERTIFICATIONS
- UL Listed

PART #	SIZE	BOX QTY.	A	B	C
1551HDG	1/2"	50	.97"	1.24"	2.46"
1552HDG	3/4"	50	1.15"	1.43"	2.76"
1553HDG	1"	50	1.42"	1.70"	3.01"
1554HDG	1-1/4"	50	1.79"	2.07"	3.16"
1555HDG	1-1/2"	50	2.04"	2.32"	3.52"
1556HDG	2"	50	2.49"	2.83"	4.39"
1557HDG	2-1/2"	25	3.06"	3.39"	4.75"
1558HDG	3"	25	3.65"	3.98"	5.38"
1559HDG	3-1/2"	25	4.21"	4.55"	5.76"
1559AHDG	4"	25	4.69"	5.03"	6.27"


ROD/WIRE FASTENERS



THREADED ANGLE ROD BRACKET



6TIBTZ



c UL us LISTED

PART #	THREAD SIZE	STATIC LOAD (LBS.)	BOX QTY.	A	B	C	D
4TIBTZ	1/4"	160	100	.85"	.984"	1.70"	.748"
6TIBTZ	3/8"	160	100	.85"	.984"	1.70"	.748"

Load limits are for fasteners only. Attachment to structure must be evaluated separately

FEATURES
- Rotatable joint ensures rod maintains a vertical position
- Galvanized bracket

APPLICATION
- Mounts to wood or concrete structures to suspend threaded rods

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



WALL MOUNT, THREADED ROD HANGER



R014T


PART #	FOR ROD SIZE	BOX QTY.
R014T	1/4" – 20	100
R038T	3/8" – 16	100

FEATURES
- Design allows threaded rods to be added quickly and easily to any overhead structure

APPLICATION
- Threaded rod support brackets are used to suspend #8 wires, and 1/4" plain or threaded rods from wood or metal overhead structures

MATERIAL/FINISH
- Black oxide/Zinc plated steel

QUICK SHOT, THREADED HANGER CLIPS



TRH-1420

FEATURES
- Included pre-set concrete nail

APPLICATION
- Quick shot threaded rod hanger is used to suspend all threaded rods quickly and easily to any overhead structure

PART #	SIZE	BOX QTY.
TRH-1420	1/4" – 20	100
TRH-3816	3/8" – 16	100

QUICK SHOT, THREADED ROD COUPLER HANGER



STF14

FEATURES
- Quickly installs with most powder actuated guns (similar to Ramset)
- Pre-assembled with concrete nail and washer
- Included threaded coupler to easily attach any length 1/4" – 20 all threaded rod

APPLICATION
- Use to install overhead all threaded rod support in concrete, masonry or metal ceiling applications

PART #	DESCRIPTION	SIZE	BOX QTY.
STF14	PRE-ASSEMBLED WITH CONCRETE NAIL AND WASHER	1/4" – 20	6"

WITH SLOCK ROD ASSEMBLY



STF0030

FEATURES
- Included pre-set concrete nail

APPLICATION
- Quick shot threaded rod hanger is used to suspend all threaded rods quickly and easily to any overhead structure



PART #	DESCRIPTION	DROP ROD THREAD	OVERALL LENGTH	BOX QTY.
STF0030	PRE-ASSEMBLED WITH CONCRETE NAIL AND WASHER	1/4" DIAMETER, NO THREADS	30"	50
STF0036		1/4" DIAMETER, NO THREADS	36"	50

QUICK SHOT, THREADED ROD COUPLER HANGER WITH ALL THREADED ROD ASSEMBLY



STF1430

FEATURES

- Pre-assembled with concrete nail and washer
- Two 1/4" mounting hex nuts included
- Will shoot into metal, concrete or masonry using standard power actuated gun (similar to Ramset)

APPLICATION

- Use to install all threaded rod overhead support in concrete, masonry or metal ceiling applications
- All threaded rod included with hanger
- Use to mount and support many electrical boxes, enclosures and lighting fixtures

PART #	DESCRIPTION	DROP ROD THREAD	OVERALL LENGTH	BOX QTY.
STF1430	PRE-ASSEMBLED WITH CONCRETE NAIL AND WASHER	1/4" – 20	30"	50
STF1436			36"	50

QUICK SCREW, THREADED ROD COUPLER



STF14NP

FEATURES

- .74" mounting hole

APPLICATION

- Screw mount angled mounting couplers allows all threaded rod length to be quickly and easily affixed to any overhead surface (mounting hardware not included)

MATERIAL/FINISH


- Steel/Galvanized

PART #	INCLUDED COUPLER THREAD	OVERALL LENGTH	BOX QTY.
STF14NP	1/4" – 20	6"	50

THREADED ROD BRACKET



6TITZ

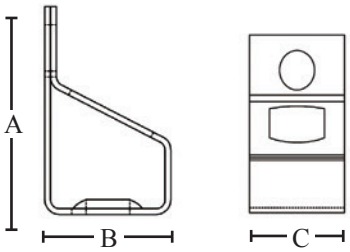

c UL us LISTED

FEATURES
- 1/4" plain mounting hole

APPLICATION
- Mounts to wood or concrete structures to suspend threaded rods or wire

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239




PART #	THREAD SIZE	STATIC LOAD (LBS.)	A	B	C	BOX QTY.
4TITZ	1/4" THREADED	160	1.40"	.85"	.748"	100
6TTZ	3/8" PLAIN	160	1.40"	.85"	.748"	100
6TITZ	3/8" THREADED	160	1.40"	.85"	.748"	100


Load limits are for fasteners only. Attachment to structure must be evaluated separately.

MULTI-FUNCTION CLIPS



4Z34TZ 4Z4STZ





c UL us LISTED

FEATURES
- Supports #10-24 and 1/4"-20 Bridle rings
- Spring steel tightening feature secures clip without addition hardware
- Use with other Southwire fasteners to create multiple cable and conduit support solutions

APPLICATION
- Easily installs on flanges, rods, and wire to support boxes or conduit

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239


PART #	FLANGE THICKNESS	ROD SIZE	WIRE SIZE	HOLE SIZE	SCREW SIZE	LOAD CAPACITY (LBS.) VERTICAL	LOAD CAPACITY (LBS.) HORIZONTAL	A	B	C	BOX QTY.
4Z34TZ	1/8" – 3/8"	1/4"	#12 – #8	1/4"	NONE	25	15	3.87"	.748"	.315"	100
4Z4STZ	1/8" – 3/8"	1/4"	#12 – #8	---	1/4" – 20	25	15	3.87"	.748"	.315"	100
6Z34TZ	3/8" – 7/16"	3/8"	---	1/4"	NONE	25	15	3.62"	.748"	.315"	100

FASTENERS/ HARDWARE




METAL STUD GROMMETS





Common hole configurations in metal studs

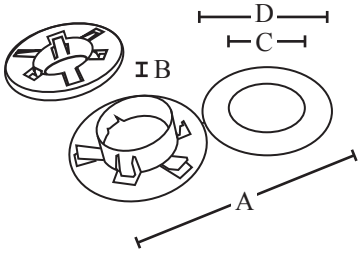

c UL us LISTED

FEATURES
- Tool free installation
- Provides 360˚ protection for cables
- Makes pulling cables easier
- Fits all stud hole sizes
- Snaps in over different hole configurations for protection from sharp metal

APPLICATION
- Universal metal stud grommets are used to protect wires from damage caused by sharp edges on metal studs

MATERIAL/FINISH
- 6/6 Nylon

CERTIFICATIONS
- UL Standard: UL514B

PART #	BOX QTY.	A	B	C	D
ESG1TZ	100	4.61"	.56"	1.35"	2.27"
ESG1MTZ	1000	4.61"	.56"	1.35"	2.27"
45TZ	200	4.61"	.56"	1.35"	2.27"



WIRETAB™ CABLE POSITIONING DEVICE



MWT1

APPLICATION
- Hold loose end of wire in position during construction.
- Ideal for under cabinet lights, security, doorbells, speakers and more

FEATURES
- WireTab™ Cable Positioning Device hugs the corner of a wall stud, allowing loose wire ends to be threaded through the channel
- When drywall is hung, a pre-cut hole is positioned to surround the WireTab™ Cable
- Positioning Device channel so wire ends are in the correct place

MATERIAL/FINISH
- Polyethylene/Yellow

PART #	TRADE SIZE	BOX QTY.
MWT1	1 GANG	25

END CAPS FOR STRUT CHANNEL




SFEC08

APPLICATION
- To cap off end of strut channel

MATERIAL/FINISH
- White Plastic

PART #	FOR CHANNEL	BOX QTY.
SFEC08	13/16" X 1-5/8"	100
SFEC09	1-5/8" X 1-5/8"	100

FLAT SPLICE PLATES

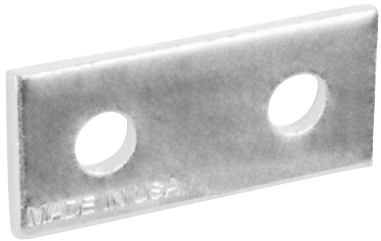

SFF30

FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel together
- SFF34 is used for parallel/side by side strut attachment

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	NUMBER OF HOLES	TYPE	BOX QTY.
SFF30	2	END SPLICE	50
SFF31	3	END SPLICE	25
SFF32	4	END SPLICE	25
SFF34	2	PARALLEL SPICE	25

3 HOLE FLAT SPLICE PLATES CORNER



SFF50-GN


FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel at a 90° angle

MATERIAL/FINISH
- Steel/Green powder coat or Electroplated zinc

PART #	HOLE DIAMETER	HOLE CENTER TO CENTER	FINISH	BOX QTY.
SFF50-GN	9/16"	1-7/8"	GREEN POWDER COAT	25
SFF50	9/16"	1-7/8"	ZINC PLATED	25

4 HOLE FLAT SPLICE PLATES CORNER



SFF51-GN


FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel at a 90° angle

MATERIAL/FINISH
- Steel/Green powder coat or Electroplated zinc

PART #	HOLE DIAMETER	HOLE CENTER TO CENTER	FINISH	BOX QTY.
SFF51-GN	9/16"	1-7/8"	GREEN POWDER COAT	20
SFF51	9/16"	1-7/8"	ZINC PLATED	20

4 HOLE FLAT SPLICE PLATES TEE



SFF60-GN

FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel at a 90° angle

MATERIAL/FINISH
- Steel/Green powder coat or Electroplated zinc

PART #	HOLE DIAMETER	HOLE CENTER TO CENTER	FINISH	BOX QTY.
SFF60-GN	9/16"	1-7/8"	GREEN POWDER COAT	20
SFF60	9/16"	1-7/8"	ZINC PLATED	20

2 HOLE 90° ANGLE CORNER BRACKET



SFL11-GN

FEATURES
- Legs: 2" x 1-7/8" * 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel at a 90° angle


MATERIAL/FINISH
- Steel/Green powder coat, Electroplated zinc, or 316 Stainless steel

PART #	HOLE DIAMETER	MATERIAL	FINISH	BOX QTY.
SFL11-GN	9/16"	STEEL	GREEN POWDER COAT	50
SFL11	9/16"	STEEL	ZINC PLATED	50
SFL11-SS	9/16"	316 STAINLESS STEEL	STAINLESS	50

TWO HOLE ANGLE BRACKET



ABTZ

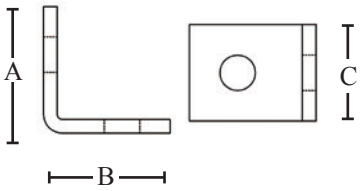



FEATURES
- 1/4" structural mounting hole

APPLICATION
- Provides attachment of rods, hooks, or chains from concrete or wood structure


MATERIAL/FINISH
- Steel/Galvanized or Stainless steel

CERTIFICATIONS
- UL Standard: UL 2239

c UL us LISTED

PART #	MATERIAL	ROD SIZE	THROUGH HOLE SIZE		BOX QTY.	A	B	C
			SMALL HOLE	LARGE HOLE				
ABTZ	STEEL/GALVANIZED	1/4"	.250"	.250"	100	.984"	.984"	.748"
AB375TZ		3/8"	.280"	.280"	100	.984"	.984"	.748"
BA-1/4-SS	STAINLESS STEEL	1/4"	.250"	.385"	100	.984"	.984"	.748"
BA-3/8-SS		3/8"	.280"	.385"	100	.984"	.984"	.748"

TWO HOLE 90° ANGLE CROSS CORNER BRACKET



SFL20


FEATURES
- Legs: 2-1/4" x 1-5/8"
- 1/4" thick steel

APPLICATION
- Use to secure three pieces of strut channel at a 90° angle

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	HOLE DIAMETER	FINISH	BOX QTY.
SFL20	9/16"	ZINC PLATED	50

THREE HOLE 90° ANGLE CORNER BRACKET



SFL21

FEATURES
- Legs: 4-1/8" x 1-5/8"
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel at a 90° angle

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	HOLE DIAMETER	FINISH	BOX QTY.
SFL21	9/16"	ZINC PLATED	25

FOUR HOLE 90° ANGLE CORNER BRACKET



L220000EGTZ



FEATURES
- Legs: 4-1/8" x 3-1/2"
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel at a 90° angle

MATERIAL/FINISH
- Steel/Galvanized or 316 Stainless steel

PART #	MATERIAL	HOLE DIAMETER	BOX QTY.
L220000EGTZ	STEEL/GALVANIZED	9/16"	25
SFL31-SS	316 STAINLESS STEEL	9/16"	25

FOUR HOLE CORNER 90° ANGLE BRACKET



SFL13-GN

FEATURES
- Legs: 3-7/8" x 3-3/4"
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel at a 90° angle

MATERIAL/FINISH
- Steel/Green powder coat, Electroplated zinc, or 316 Stainless steel

PART #	HOLE DIAMETER	MATERIAL	FINISH	BOX QTY.
SFL13-GN	9/16"	STEEL	GREEN POWDER COAT	25
SFL13	9/16"	STEEL	ZINC PLATED	25

THREE HOLE CORNER 90° ANGLE BRACKET



SFL30

FEATURES
- Legs: 3-1/2" x 2-1/4"
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel at a 90° angle

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	HOLE DIAMETER	FINISH	BOX QTY.
SFL30	9/16"	ZINC PLATED	25

TWO HOLE CORNER 45° ANGLE BRACKET



SFL60

FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel at a 45° angle

MATERIAL/FINISH
- Steel/Green powder coat or Electroplated zinc

PART #	HOLE DIAMETER	FINISH	BOX QTY.
SFL60-GN	9/16"	GREEN POWDER COAT	25
SFL60	9/16"	ZINC PLATED	25

FOUR HOLE CORNER 45° ANGLE BRACKET



SFL62

FEATURES
- 1/4" thick steel


APPLICATION
- Use to secure two pieces of strut channel at a 45° angle

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	HOLE DIAMETER	FINISH	BOX QTY.
SFL62	9/16"	ZINC PLATED	25

U-FITTING SPLICE

EXTERNAL, FOUR HOLE



SFU33-GN

FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure two pieces of strut channel

MATERIAL/FINISH
- Steel/Green powder coat or Electroplated zinc

PART #	FOR CHANNEL DEPTH	HOLE DIAMETER	LENGTH	FINISH	BOX QTY.
SFU33-GN	13/16"	9/16"	7-1/4"	GREEN POWDER COAT	10
SFU33	13/16"	9/16"	7-1/4"	ZINC PLATED	10
SFU32-GN	1-5/8"	9/16"	7-1/4"	GREEN POWDER COAT	10
SFU32	1-5/8"	9/16"	7-1/4"	ZINC PLATED	10

STRUT JOINER INTERNAL

WITH CAM SCREWS



SFEF33-1316

APPLICATION
- Use to secure two pieces of strut channel

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	FOR CHANNEL DEPTH	LENGTH	FINISH	BOX QTY.
SFEF33-1316	13/16"	4-7/16"	ZINC PLATED	10
SFEF33-158	1-5/8"	4-7/16"	ZINC PLATED	10

WALL BRACKET CHANNEL

FOR 1-5/8" STRUT



SFBR40-6

FEATURES
- 1/4" thick steel

APPLICATION
- Use as shelf or to hang other apparatuses

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	DESCRIPTION	LENGTH	UNIFORM LOAD CAPACITY (LBS.)	BOX QTY.
SFBR40-6	2 MOUNTING HOLES	6"	1,250	1
SFBR40-9	3 MOUNTING HOLES	9"	1,000	1
SFBR40-12	4 MOUNTING HOLES	12"	750	1

TWO HOLE POST BASE

6" X 4"



SFP10

FEATURES
- 1/4" thick steel


APPLICATION
- Use to secure strut channel to floor or flat surface

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	DESCRIPTION	CHANNEL SIZE	FINISH	BOX QTY.
SFP10	PARALLEL TO EDGE	1-5/8"	ZINC PLATED	5

FOUR HOLE POST BASE

6" X 6"



SFP14-GN

FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure strut channel to floor or flat surface

MATERIAL/FINISH
- Steel/Green powder coat or Electroplated zinc


PART #	DESCRIPTION	CHANNEL SIZE	FINISH	BOX QTY.
SFP14-GN	PARALLEL TO EDGE	1-5/8"	GREEN POWDER COAT	5
SFP14	PARALLEL TO EDGE	1-5/8"	ZINC PLATED	5
SFP13	TURNED 45° TO EDGE	1-5/8"	ZINC PLATED	5

RMC U-BOLT WITH HEX NUTS

HOT DIP GALVANIZED



761HDG



FEATURES
- Hot dip galvanized zinc plating over malleable iron for added durability and corrosion protection

APPLICATION
- U-Bolts secure conduit to a beam or channel

MATERIAL/FINISH
- Malleable iron/Hot dip galvanized

PART #	SIZE	BOLT SIZE	INNER QTY.	MASTER QTY.	A	B	C	D
761HDG	1/2"	5/16" – 18	25	250	.97"	1.24"	2.46"	1.50"
762HDG	3/4"	5/16" – 18	25	250	1.15"	1.43"	2.76"	1.50"
763HDG	1"	5/16" – 18	25	250	1.42"	1.70"	3.01"	1.50"
764HDG	1-1/4"	5/16" – 18	20	200	1.79"	2.07"	3.16"	1.50"
765HDG	1-1/2"	5/16" – 18	20	200	2.04"	2.32"	3.52"	1.50"
766HDG	2"	3/8" – 16	10	100	2.49"	2.83"	4.39"	1.96"
767HDG	2-1/2"	3/8" – 16	---	20	3.06"	3.39"	4.75"	1.96"
768HDG	3"	3/8" – 16	---	20	3.65"	3.98"	5.38"	1.96"
769HDG	3-1/2"	3/8" – 16	---	20	4.21"	4.55"	5.76"	1.96"
770HDG	4"	3/8" – 16	---	20	4.69"	5.03"	6.27"	1.96"

STRUT TO BEAM CLAMP WITH BOLT



SFBC60


FEATURES
- 3/8"–16 threads

APPLICATION
- Use to secure strut channel to underside of a beam

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	FOR HEIGHT CHANNEL	MAX FLANGE THICKNESS	MAX LOAD (LBS.) USED IN PAIRS	BOX QTY.
SFBC60	13/16" or 1-5/8"	3/4"	1,200	25
SFBC61	2-7/16" or 3-1/4"	3/4"	1,200	25

STRUT TO BEAM WINDOW CLAMP



SFBC40

FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure strut channel to floor or flat surface

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	FOR CHANNEL	MAX LOAD (LBS.) USED IN PAIRS	MATERIAL	BOX QTY.
SFBC40	1-5/8" x 1-5/8"	950	ZINC PLATED STEEL	20

STRUT TO BEAM NOTCHED CLAMP



SFBC70

FEATURES
- 1/4" thick steel
- 1/2"-13 HHCS and 1/2" channel nut sold separately

APPLICATION
- Use to secure strut channel to the underside of a structural beam in tight spaces
- Use in conjunction with spring nuts or cone nuts to securely fasten the strut to the beam surface

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	FOR CHANNEL	MAX LOAD (LBS.) USED IN PAIRS	BOX QTY.
SFBC70	13/16" x 1-5/8"	1,100	25

BAR-JOIST WASHERS



23WBJ

APPLICATION
- Bar joist washers clamp on open web bar joist trusses and allow for multiple items to be hung along ceiling joists
- Bar joist washers allow the installer to easily mount boxes, hangers and clamps anywhere along linear open bar joist grid

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	FOR ROD OR BOLT SIZE	BOX QTY.
23WBJ	1/4"	50
24WBJ	3/8"	50

SWIVEL, MALE/FEMALE



SFSW13-3816

FEATURES
- Allows for straight, flush hang

APPLICATION
- Use as a union between two supports or pieces of all threaded rod

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	THREAD	MAX LOAD CAPACITY (LBS.)	BOX QTY.
SFSW13-3816	3/8" – 16	620	50
SFSW13-1213	1/2" – 13	1,150	50

SWIVEL, FEMALE/FEMALE



SFSW12-3816

FEATURES
- Allows for straight, flush hang

APPLICATION
- Use as a union between two supports or pieces of all threaded rod

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	THREAD	MAX LOAD CAPACITY (LBS.)	BOX QTY.
SFSW12-3816	3/8" – 16	620	50
SFSW12-1213	1/2" – 13	1,150	50

THREADED ROD HANGERS



SMY142W



SMY141S

FEATURES
- Direct mount into support surface

APPLICATION
- Threaded rod hangers are specifically designed to be used in overhead applications to provide tapped 1/4"-20 or 3/8"-16 threaded rod attachment points

MATERIAL/FINISH
- Steel/Zinc plated

PART #	OVERALL LENGTH	APPLICATION	FOR ROD SIZE	BOX QTY.
SMY142W	2"	FOR WOOD	1/4" – 20	10
SMY382W	2-1/2"	FOR WOOD	3/8" – 16	10
SMY141C	2"	FOR MASONRY/BRICK	1/4" – 20	10
SMY381C	2-1/2"	FOR MASONRY/BRICK	3/8" – 16	10
SMY141S	1"	FOR SHEET METAL	1/4" – 20	10
SMY381S	1"	FOR SHEET METAL	3/8" – 16	10



SLIP-TIGHT THREADED ROD NUT



SLN-3816

FEATURES
- Secure nut in place with Allen wrench

APPLICATION
- Slip-tight threaded rod nut has ability to be positioned on threaded rod or bolt at any point, without the time consuming nuisance of threading


MATERIAL/FINISH
- Steel/Zinc plated

PART #	FOR ROD SIZE	BOX QTY.
SLN-3816	3/8" – 16	100

SPLIT NUT




SN37TZ



FEATURES
- Allows user to start threading at any point along the threaded rod
- Allows user to avoid damaged threads
- Strong load ratings

APPLICATION
- Southwire's Split Nuts reduce the time for threading a rod compared to conventional nuts

MATERIAL/FINISH
- Steel/Galvanized




PART #	ROD SIZE	A	B	BOX QTY.
SN25TZ	1/4"-20	0.64"	0.35"	100
SN37TZ	3/8"-16	0.86"	0.49"	100
SN50TZ	1/2"-13	1.05"	0.63"	100

TOP SPRING NUT



TSNT0037EGTZ



FEATURES
- Spring diameter 1.10"
- Grooved attachment nut creates a secure fit and improves traction

APPLICATION
- Manufactured for slip resistant support of components in strut system

MATERIAL/FINISH
- Steel/Galvanized



PART #	ROD SIZE	TORQUE FORCE (LBS.)	BOX QTY.	A	B	C	D
TSNT0025EGTZ	1/4"	13	100	1.35"	.208"	.223"	.729"
TSNT0037EGTZ	3/8"	22	100	1.36"	.345"	.223"	.75"

STRUT NUTS WITH SPRING

FOR STRUT CHANNEL



SNSS1420



2111

FEATURES
- Teeth to bite into inside lip of strut
- SNSSXXXX - short spring
- SNLSXXXX - long spring
- 211X - standard length

APPLICATION
- Secures fittings or other apparatus to strut system


MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	FOR CHANNEL DEPTH	HOLE THREAD	BOX QTY.
SNSS1420	13/16" TO 1"	1/4" – 20	50
SNSS3816	13/16" TO 1"	3/8" – 16	50
SNSS1213	13/16" TO 1"	1/2" – 13	50
2111	1-3/8" TO 1-5/8"	1/4" – 20	100
2112	1-3/8" TO 1-5/8"	3/8" – 16	100
2113	1-3/8" TO 1-5/8"	1/2" – 13	50
SNLS1420	2-7/16" TO 3-1/4"	1/4" – 20	50
SNLS3816	2-7/16" TO 3-1/4"	3/8" – 16	50
SNLS1213	2-7/16" TO 3-1/4"	1/2" – 13	50

SELF-TAPPING SCREW



SMS8TZ



FEATURES
- Self-drilling and tapping
- Low profile Philips head #8, 1/2"

APPLICATION
- Supports metal box brackets to studs
- Low profile screw head reduces sheet rock bulge


MATERIAL/FINISH
- Steel/Galvanized

PART #	BOX QTY.	A	B
SMS8TZ	1000	.414	.500

BOTTOM SPRING NUT



SPRA0037EGTZ



FEATURES
- Grooved attachment nut creates secure fit and improves traction
- For use with 1-5/8" strut channel

APPLICATION
- Manufactured for slip resistant support of components in strut system

MATERIAL/FINISH
- Steel/Galvanized

PART #	CHANNEL TYPE	ROD SIZE	TORQUE FORCE (LBS.)	NUT THICKNESS
SPRA0025EGTZ	A & B	1/4" – 20	13	.21"
SPRA0037EGTZ	A & B	3/8" – 16	22	.34"
SPRA0050EGTZ	A & B	1/2" – 13	40	.449"
SPRC0025EGTZ	C	1/4" – 20	13	.222"

PART #	BOX QTY.	A	B	C	D
SPRA0025EGTZ	100	1.79"	1.58"	1.35"	.741"
SPRA0037EGTZ	100	1.95"	1.61"	1.35"	.72"
SPRA0050EGTZ	100	2.02"	1.57"	1.34"	.747"
SPRC0025EGTZ	100	1"	.778"	1.35"	.73"



STRUT NUT, NO SPRING
FOR STRUT CHANNEL



CNN-038

UL LISTED

FEATURES
- Teeth to bite into inside lip of strut

APPLICATION
- Secures fittings or other apparatus to strut system

MATERIAL/FINISH
- Steel/Electroplated zinc

CERTIFICATIONS
- UL Listed

PART #	HOLE THREAD	BOX QTY.
CNN-025	1/4" – 20	100
CNN-038	3/8" – 16	100
SNW01213	1/2" – 13	50

CONE NUT
FOR STRUT CHANNEL



SNCN1420

FEATURES
- Push and turn easy installation
- Teeth to bite into inside lip of strut

APPLICATION
- Secures fittings or other apparatus to strut system

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	HOLE THREAD	BOX QTY.
SNCN1420	1/4" – 20	100
SNCN3816	3/8" – 16	100
SNCN1213	1/2" – 13	100

SQUEEZE NUT
FOR STRUT CHANNEL



SNSQ1420

FEATURES
- Push and turn easy installation
- Teeth to bite into inside lip of strut

APPLICATION
- Secures fittings or other apparatus to strut system

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	HOLE THREAD	BOX QTY.
SNSQ1420	1/4" – 20	100
SNSQ3816	3/8" – 16	100
SNSQ1213	1/2" – 13	100


SQUARE CHANNEL WASHER



F130000EGTZ


APPLICATION
- Secures rods to strut channel

MATERIAL/FINISH
- Steel/Galvanized



PART #	ROD SIZE	HOLE DIAMETER	BOX QTY.
F130000EGTZ	5/16"	3/8"	100
F140000EGTZ	3/8"	7/16"	100
F150000EGTZ	1/2"	9/16"	100

STRUT WASHERS
"U/SADDLE" STYLE



SFU70-25

FEATURES
- Saddle design prevents twisting or movement of washer

APPLICATION
- Use to secures all threaded rod to strut system

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	BOLT SIZE	BOX QTY.
SFU70-25	1/4" – 20	50
SFU70-38	3/8" – 16	50
SFU70-50	1/2" – 13	50

STRUT WASHERS

1-5/8" SQUARE STANDARD



SW-1/4-SS

FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure all threaded rod to strut system

MATERIAL/FINISH
- Steel/Green powder coat finish, Electroplated zinc, or 316 Stainless steel

PART #	BOLT SIZE	FINISH	BOX QTY.
SW-1/4-G	1/4"	GREEN POWDER COAT	100
SW-3/8-G	3/8"		100
SW-1/2-G	1/2"		100
SW-5/8-G	5/8"		100
SW-1/4	1/4"	ZINC PLATED	100
SW-3/8	3/8"		100
SW-1/2	1/2"		100
SW-5/8	5/8"		100
SW-3/4	3/4"		100
SW-1/4-SS	1/4"	316 STAINLESS STEEL	100
SW-3/8-SS	3/8"		100
SW-1/2-SS	1/2"		100
SW-5/8-SS	5/8"		100

2" SQUARE, EXTRA LARGE



SW-2-3/8

FEATURES
- 1/4" thick steel

APPLICATION
- Use to secure all threaded rod to strut system

MATERIAL/FINISH
- Steel/Electroplated zinc

PART #	BOLT SIZE	FINISH	BOX QTY.
SW-2-3/8	3/8"	ZINC PLATED	100
SW-2-1/2	1/2"		100
SW-2-5/8	5/8"		100
SW-2-3/4	3/4"		100

STRUT WASHERS

1-5/8" SQUARE, NOTCHED




SFF20

FEATURES
- Notched design prevents twisting or movement of washer
- 1/4" thick steel

APPLICATION
- Use to secure all threaded rod to strut system

MATERIAL/FINISH
- Steel/Electroplated zinc

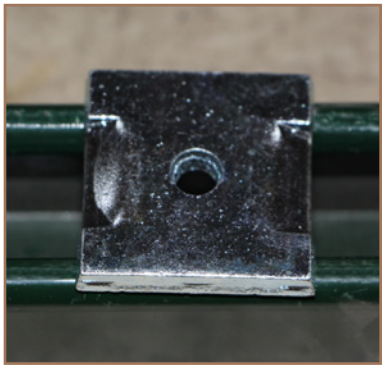

PART #	BOLT SIZE	FINISH	BOX QTY.
SFF20	1/4"	ZINC PLATED	100
SFF21	3/8"		100
SFF22	1/2"		100
SFF23	5/8"		100
SFF24	3/4"		100

FLAT OCTAGON



12WFS

FEATURES
- 1-3/8" O.D.
- Mounts inside strut channel

APPLICATION
- Use to secure all threaded rods to strut system

MATERIAL/FINISH
- Steel/Electroplated zinc or 304 Stainless steel

PART #	BOLT SIZE	FINISH	BOX QTY.
12WFS	1/4" OR 3/16"	ZINC PLATED STEEL	100
13WFS	1/2"		100
14WFS	3/8"		100
12WFSS	1/4" OR 3/16"	316 STAINLESS STEEL	100
13WFSS	1/2"		100
14WFSS	3/8"		100

STUD/ DRYWALL

Support and protection for electrical circuits through termination within the structure

BOX SUPPORT SYSTEMS

CABLE/CONDUIT SUPPORT

NAIL PLATES


BOX SUPPORT SYSTEMS



FLOOR MOUNT BOX SUPPORT



FMBS18TZ

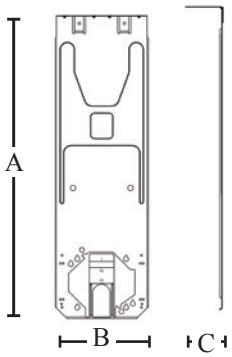

FEATURES
- Mounts inside or under wall stud tracks
- Built-in back support
- Meets ADA guidelines for 15" height minimum

APPLICATION
- Provides versatility in positioning electrical boxes in between wall studs

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Standard: UL 514A




c UL us LISTED

PART #	A	B	C	BOX QTY.
FMBS18TZ	21.06"	6.48"	2.56"	25

SNAP-ON BOX SUPPORT



MSFTZ

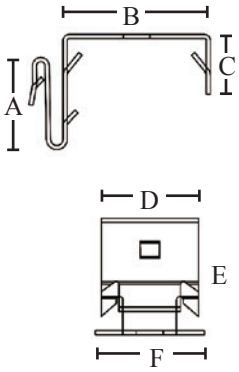

FEATURES
- Snaps on to metal/wood studs
- Clips onto box
- Center hole allows for screw attachment

APPLICATION
- Clip-on feature easily attaches electrical boxes to studs

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239




c UL us LISTED

PART #	A	B	C	D	E	F	BOX QTY.
MSFTZ	.962"	1.54"	.622"	1"	1.20"	1.12"	100

STEEL BOX SUPPORT



DSI2ATZ



FEATURES
- Break apart design for easy handling
- Sold in pairs

APPLICATION
- Bendable, easy-to-use tabs secure metal boxes in drywall, lath, and plaster


MATERIAL/FINISH
- Steel






PART #	A	B	BOX QTY.
DSI2ATZ	5.125"	2.25"	50


BOX MOUNTING BRACKET




RBS16TZ

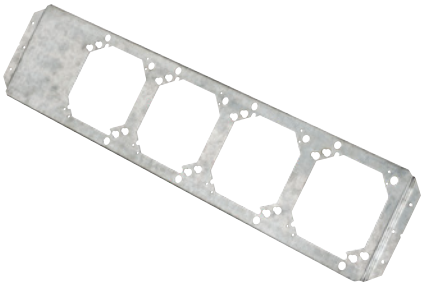

RBS24TZ





c UL us LISTED


FEATURES
- For use with 4" & 4-11/16" outlet boxes
- Suitable for 1-1/2" & 2-1/8" deep boxes
- Supports single or multiple boxes, plaster rings or low voltage devices

APPLICATION
- Secures multiple boxes between studs using one bracket; 16" supports up to 3 boxes and 24" supports up to 4 boxes

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Standard: UL514A

PART #	STUD SPACING	A	B	BOX QTY.
RBS16TZ	16"	16"	5"	20
RBS24TZ	24"	24"	5"	20

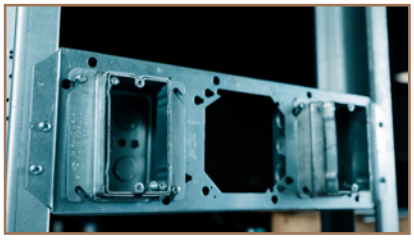

BOX MOUNTING BRACKET 3-POSITION FOR ADJUSTABLE DEPTH DEVICE RINGS



BMB3U

FEATURES
- Mounts up to three boxes and Southwire adjustable device covers

APPLICATION
- Bracket is used to position three junction boxes with Southwire adjustable device rings between wood or metal studs


MATERIAL/FINISH
- Steel/Galvanized

PART #	ADJUST. DEPTH RING COMPATIBILITY	STUD CENTER DISTANCE	FITS SQUARE BOXES	BOX QTY.
BMB3U	AMR1, AMR2, AMR0	16"	4", 4-11/16"	25

SCREW GUN BRACKETS



TSGB16TZ

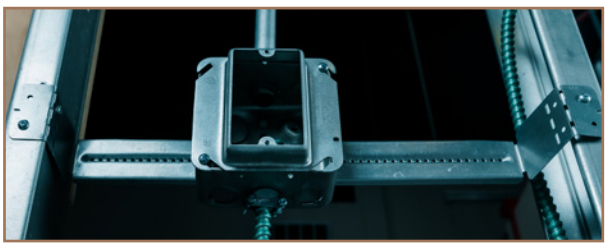

FEATURES
- Notched and marked allows for easy identification and bending
- Pilot holes for easy box attachment
- Adjustable version for non-standard stud spacing
- Mounting holes length of bar for easy box installation
- 13 lbs. load capacity when intended to support a fixture or luminaire in a wall

APPLICATION
- Screw gun brackets allow electrical boxes to be quickly and easily installed between ceiling joists or wall studs

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Standard: UL 514A*

c UL us LISTED


PART #	SPAN	LENGTH	BOX DEPTHS	BOX QTY.
SGB16ATZ*	NON-ADJUSTABLE	16"	1-1/2", 2-1/8"	50
TSGB16TZ*	ADJUSTABLE	11-1/2" TO 17-3/4"	1-1/2", 2-1/8"	50
TSGB1624TZ*	ADJUSTABLE	14-1/4" TO 24-1/4"	1-1/2", 2-1/8", 2-1/2"	50
BHAD16**	ADJUSTABLE	11" TO 18"	3 – 3-1/2"	50
BHAD24**	ADJUSTABLE	17" TO 26"	3 – 3-1/2"	50

*cULus listed | **Not UL listed

TELESCOPING BOX SUPPORT



TSRBS1625TZ

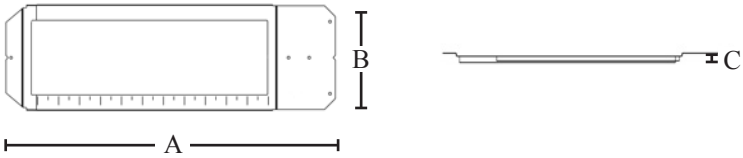

c UL us LISTED


PART #	A	B	C	BOX QTY.
TSRBS1625TZ	17.56"	4.94"	.561"	25

FEATURES
- Telescoping feature accommodates studs from 16" to 24"
- Use with 4" square box and mud ring
- Will support 4 electrical boxes in 24" spacing
- Easily adjust box position after installed

APPLICATION
- Provides flexibility to support electrical boxes in-between wall studs


MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Standard: UL 514A

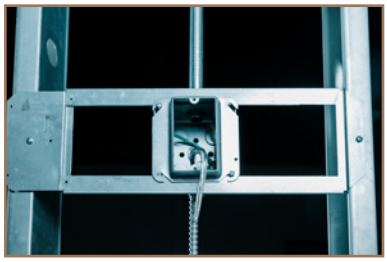

SLIDER BOX BRACKET

FOR BOX MOUNTING BETWEEN STUDS

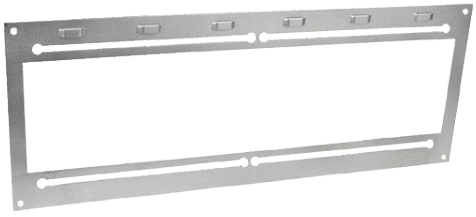

BMB16SL

UL LISTED

PART #	STUD CENTER DISTANCE	FITS SQUARE BOXES	BOX QTY.
BMB16SL	16"	4", 4-11/16"	50
BMB616SL	16"	6"	50

FEATURES
- Full box adjustment left/right for exact placement of box/cover

APPLICATION
- Use to position a box with standard device ring between wood or metal studs


MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Listed (exception BMB16SL)



SINGLE BOX MOUNTING BRACKET

FOR STANDARD DEVICE RINGS



BB4-26

FEATURES
- Accepts 4", 4-11/16" and 6" square boxes and device rings
- Centering notch on face of bracket
- Either side of stud mount option

APPLICATION
- Universal box mounting brackets have a single stud face mount tab and can be used to support electrical boxes mounted on either side of a metal or wood stud
- Designed for use with standard device rings (mud rings)

MATERIAL/FINISH
- Steel/Galvanized


CERTIFICATIONS
- UL Listed

PART #	FAR-SIDE STAND OFF	FITS SQUARE BOXES	BOX QTY.
BB4-26	2-1/2", 3-5/8"	4", 4-11/16"	25
BB6-26	2-1/2", 3-5/8"	6"	50


STUD MOUNTING BRACKETS



C6TZ



BMB1U



FEATURES
- Accepts 4" and 4-11/16" square boxes and adjustable device rings
- Centering notch on face of bracket

APPLICATION
- Universal box mounting brackets have a single stud face mount tab and can be used to support electrical boxes mounted to metal or wood studs
- Designed for use with Southwire adjustable device rings (mud rings)

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- cULus Listed* or UL Listed**

c UL us LISTED

PART #	WALL DEPTH	A	B	C	BOX QTY.
C6TZ*	2-1/2" TO 6"	3.50"	4.50"	5.625"	50
C23TZ*	2-1/2" TO 3-5/8"	5.875"	4.50"	5.625"	50
BMB1U**	2-1/2" OR 3-5/8"	3.46"	5.38"	5.38"	50

*cULus listed | **Not UL listed




CABLE/CONDUIT SUPPORT





CONDUIT TO STUD ATTACHMENT CLAMP



6MFTZ







c UL us LISTED

FEATURES
- Easily clips onto studs
- Stud clip size 1-3/8" to 1-1/2"
- Snap Close conduit support
- Screw hole feature allows clip to be screwed to stud for additional support

APPLICATION
- Conduit to stud attachment clamp easily secures conduit to studs without the need for tools

MATERIAL/FINISH
- Spring Steel/GEOSEAL™


CERTIFICATIONS
- UL Standard: UL 2239


PART #	EMT SIZE	FLEX CONDUIT SIZE	MC/AC CABLE SIZE	BOX QTY.	A	B	C	D	E	F
6MFTZ	---	3/8"	14-2 TO 12-3	100	.63"	1.53"	1.68"	1.38"	.63"	3.55"
16MFTZ	1"	---	---	100	.63"	1.53"	2.52"	1.38"	.63"	4.39"
20MFTZ	1-1/4"	---	---	50	.63"	1.53"	2.96"	1.38"	.63"	4.83"
812MFTZ	1/2 & 3/4"	---	---	100	.63"	1.53"	2.05"	1.38"	.63"	3.92"

CABLE TO METAL STUD CLIP



449TZ





c UL us LISTED

FEATURES
- Supports 14-3 to 12-3 MC/AC cables
- Easy no-tool installation

APPLICATION
- A quick and convenient solution to attach MC/AC cables to metal studs

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



PART #	A	B	C	D	E	BOX QTY.
449TZ	.792"	.935"	.591"	1.13"	.63"	100


BOX SUPPORT BRACKET



766TZ



766ATZ



FEATURES
- Easily clips to electrical boxes

APPLICATION
- Provides electrical box support for multiple wall depths

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Standard: UL 514A

c UL us LISTED


PART #	WALL DEPTH	BOX CLIP FEATURE	A	B	C	BOX QTY.
766TZ	2-1/2, 3-5/8, 4	SIDE WALL	4.29"	.752"	.168"	100
766ATZ	2-1/2, 3-1/2, 4, 6	SIDE HOLES	5.14"	.092"	.150"	100



CONDUIT TO STUD CLAMP



350812MTZ



FEATURES
- Supports 1/2" and 3/4" EMT
- Clip rotates 360˚ for easy positioning
- Secures to stud with screws
- Snap-close clip

APPLICATION
- Allows positioning of conduit to any size wood or metal studs

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239


c UL us LISTED

PART #	A	B	C	BOX QTY.
350812MTZ	2.05"	1.26"	.630"	100



CABLE/CONDUIT STUD CLIP



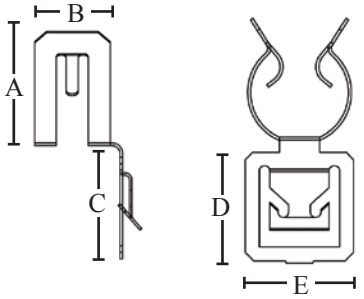

AR812TZ

c UL us LISTED


PART #	A	B	C	D	E	BOX QTY.
AR812TZ	1.13"	.748"	1.14"	1"	1"	100

FEATURES
- Supports 1/2", 3/4" EMT, 1/2" Rigid
- Reduces conduit rattling
- Snaps on to metal studs, no tools required


APPLICATION
- Provides support for EMT, Rigid, or MC/AC cables through metal studs

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239

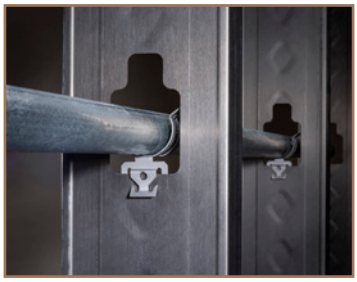

MC, NM TO STUD WALL

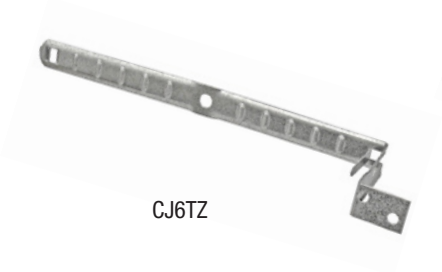

CJ6TZ



CJIN

FEATURES
- Supports up to 6 runs of NM sheathed cable or 4 runs of MC and AC cables
- Collapsible leg locks and secures cables for a snug fit
- Locating ribs to maintain cable separation

APPLICATION
- Easily installs to secure NM or MC cables to wood or metal studs
- Designed with a flared edge for maximum cable protection

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIONS
- UL Standard: UL 2239
- NEC® 300.4D applicable

c UL us LISTED

PART #	CABLE SURFACE	LENGTH	BOX QTY.
CJ6TZ	STEEL	6"	100
CJIN	INSULATED RUBBER	6"	100





STUD TYPE	CABLE TYPE	CABLE SIZE	CABLES PER FASTENER
WOOD	NON-METALLIC	14-2, 12-2, 10-2, 14-3, 12-3, AND 10-3 WITH GROUND	MAX 6
		8 -2 AND 6-2 WITH GROUND	MAX 4
METAL STUD	METAL CLAD (MC)	14-2, 12-2, 10-2, 14-3, 12-3, 10-3, 14-4,12-4, AND 10-4 WITH GROUND	MAX 4

NAIL STRAP CONDUIT SUPPORT

WOOD STUD MOUNT



DS1TZ

FEATURES
- Stamped teeth and pointed tip prevent accidental pull out

APPLICATION
- Secures EMT or Rigid/IMC conduit to wood stud or surface


MATERIAL/FINISH
- Stamped steel/Zinc plated

PART #	FOR EMT CONDUIT	FOR RIGID CONDUIT	INNER QTY.	BOX QTY.
DS1TZ	1/2"	3/8"	100	1000
DS2	3/4"	1/2"	100	1000
DS3	1"	3/4"	100	1000

CABLE/CONDUIT TO STUD BRACKET



CS812TZ



c UL us LISTED

FEATURES
- Supports 14-3 to 10-2 MC/AC cables
- Can be used on wood or metal studs

APPLICATION
- Provides a solution to attach EMT conduit or MC/AC cables to studs
- The multiple mounting holes allow for easy alignment of cable to junction box knockouts

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239




PART #	EMT SIZE	A	B	C	D	BOX QTY.
CS16TZ	1"	2.67"	2.07"	1.14"	1"	100
CS812TZ	1/2" & 3/4"	2.67"	1.42"	.811"	1"	100
CS812DTZ	1/2" & 3/4"	2.67"	2.04"	.811"	1"	100

CLIP-ON CABLE TO STUD CLIP



FXC20TZ



c UL us LISTED

PART #	A	B	C	D	E	F	BOX QTY.
FXC20TZ	.672"	1.89"	1.50"	.745"	.882"	.752"	100

FEATURES
- Supports 14-2 to 12-3 MC/AC cables
- Includes screw mounting hole to provide additional support

APPLICATION
- Clips on to studs to provide a cable management solution for MC/AC cables.
- Results in a clean and professional installation

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239






SNAP-IN CABLE BRACKET



MAC2TZ



c UL us LISTED

PART #	A & B	C	D	BOX QTY.
MAC2TZ	1.57"	1.967"	.647"	100

FEATURES
- Supports 14-2 to 10-3 MC/AC cables
- 1/8" max flange thickness
- Can be separated to create two separate clips
- Mounting holes allow for anchoring to wood, concrete or block

APPLICATION
- Clips onto flanges without tools or screws to wood, block, concrete, or metal studs
- Secures MC/AC cables to studs


MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



SCREW-ON CABLE TO STUD CLIP





MCS100TZ

c UL us LISTED


PART #	A	B	C	D	BOX QTY.
MCS100TZ	3.66"	2.42"	1.29"	2.46"	100

FEATURES
- Supports 14-3 to 10-2 MC/AC cables
- Can be used on metal or wood studs

APPLICATION
- Screws on to studs to provide a cable management solution for MC/AC cables
- Results in a clean and professional installation

MATERIAL/FINISH
- Steel/Galvanized


CERTIFICATIONS
- UL Standard: UL 2239

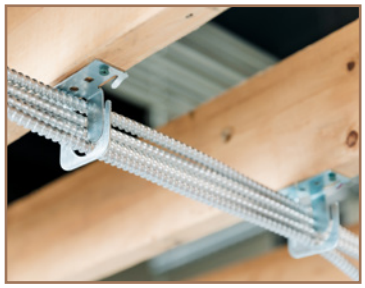


PANEL BRACKET 16"



PBTS16

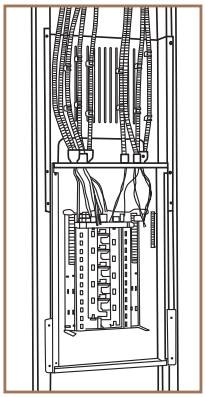

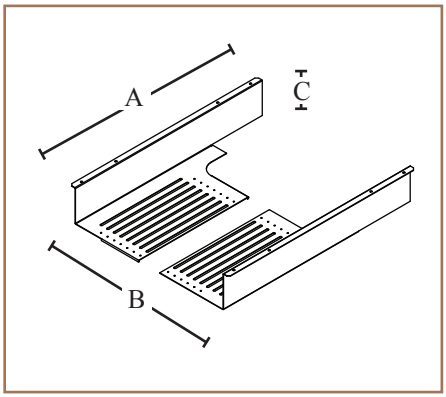

PART #	A	B	C	BOX QTY.
PBTS16	21.38"	16"	3.6"	100

FEATURES
- Provide a rigid surface to easily secure flexible conduit cables
- Great solution for contractors wanting to pre-fab panel boxes
- Secure and protect cables during assembly, shipping and installation
- Saving time and labor assembly
- Compatible with the Southwire 449TZ MC/AC cable clip for securing
- 14-2 to 12/3 MC/AC cables to panel bracket. All other cables can be attached by other means

APPLICATION
- Between stud cable support mounting bracket

MATERIAL/FINISH
- Galvanized steel

CABLE STAPLES



183


PART #	CABLE RANGE	SIZE	INNER QTY	MASTER QTY
183	ARMORED CABLE 14/2 & 14/3 METAL CLAD CABLE 14/2 & 14/3 NONMETALLIC SHEATHED 14/2 THROUGH 10/3 UNDERGROUND FEEDER 14/2 & 14/3	1/2"	100	5000
184		1/2"	500	5000
185		1/2"	BUCKET	5000
193	ARMORED CABLE 14/2 THROUGH 10/3 METAL CLAD CABLE 14/2 TROUGH 10/3 NONMETALLIC SHEATHED 12/3 THROUGH 10/3 UNDERGROUND FEEDER 14/2 & 12/3	9/16"	100	5000
194		9/16"	500	5000
195		9/16"	BUCKET	5000

FEATURES
- Pointed legs drive straight and limit splitting of wood
- Recessed heads drive fast and protect cable insulation
- Sharp tips for easier starting
- Strong, resilient steel construction

APPLICATION
- Secures Romex® Brand nonmetallic sheathed cable, armored cable, metal clad cable, and feeder cable

MATERIAL
- Steel

SERVICE ENTRANCE



32-1

PART #	CABLE RANGE	SIZE	INNER QTY	MASTER QTY
32-1	#6/3 SEU	3/4" x 1-5/16"	100	1000
34-1	#2/3 SEU	1" x 1"	100	1000
36-1	#4/0 SEU	1-5/8" x 2-1/8"	100	500

FEATURES
- Pointed offset to drive in straight
- Strong, resilient steel construction

APPLICATION
- Secures Romex® Brand nonmetallic sheathed cable, armored cable, BX, and flexible conduit to wood or masonry

MATERIAL
- Steel

INSULATED



183I


PART #	CABLE RANGE	SIZE	INNER QTY	MASTER QTY
183I	ARMORED CABLE 14/2 & 14/3 METAL CLAD CABLE 14/2 & 14/3 NONMETALLIC SHEATHED 14/2 THROUGH 10/3 UNDERGROUND FEEDER 14/2 & 14/3	1/2"	100	5000
184I		1/2"	500	5000
185I		1/2"	BUCKET	2500

FEATURES
- Plastic insulator protects cable
- Strong, resilient steel construction

APPLICATION
- Secures Romex® Brand nonmetallic sheathed cable, armored cable, metal clad cable, and feeder cable

MATERIAL
- Steel nail with plastic insulator


NAIL PLATES

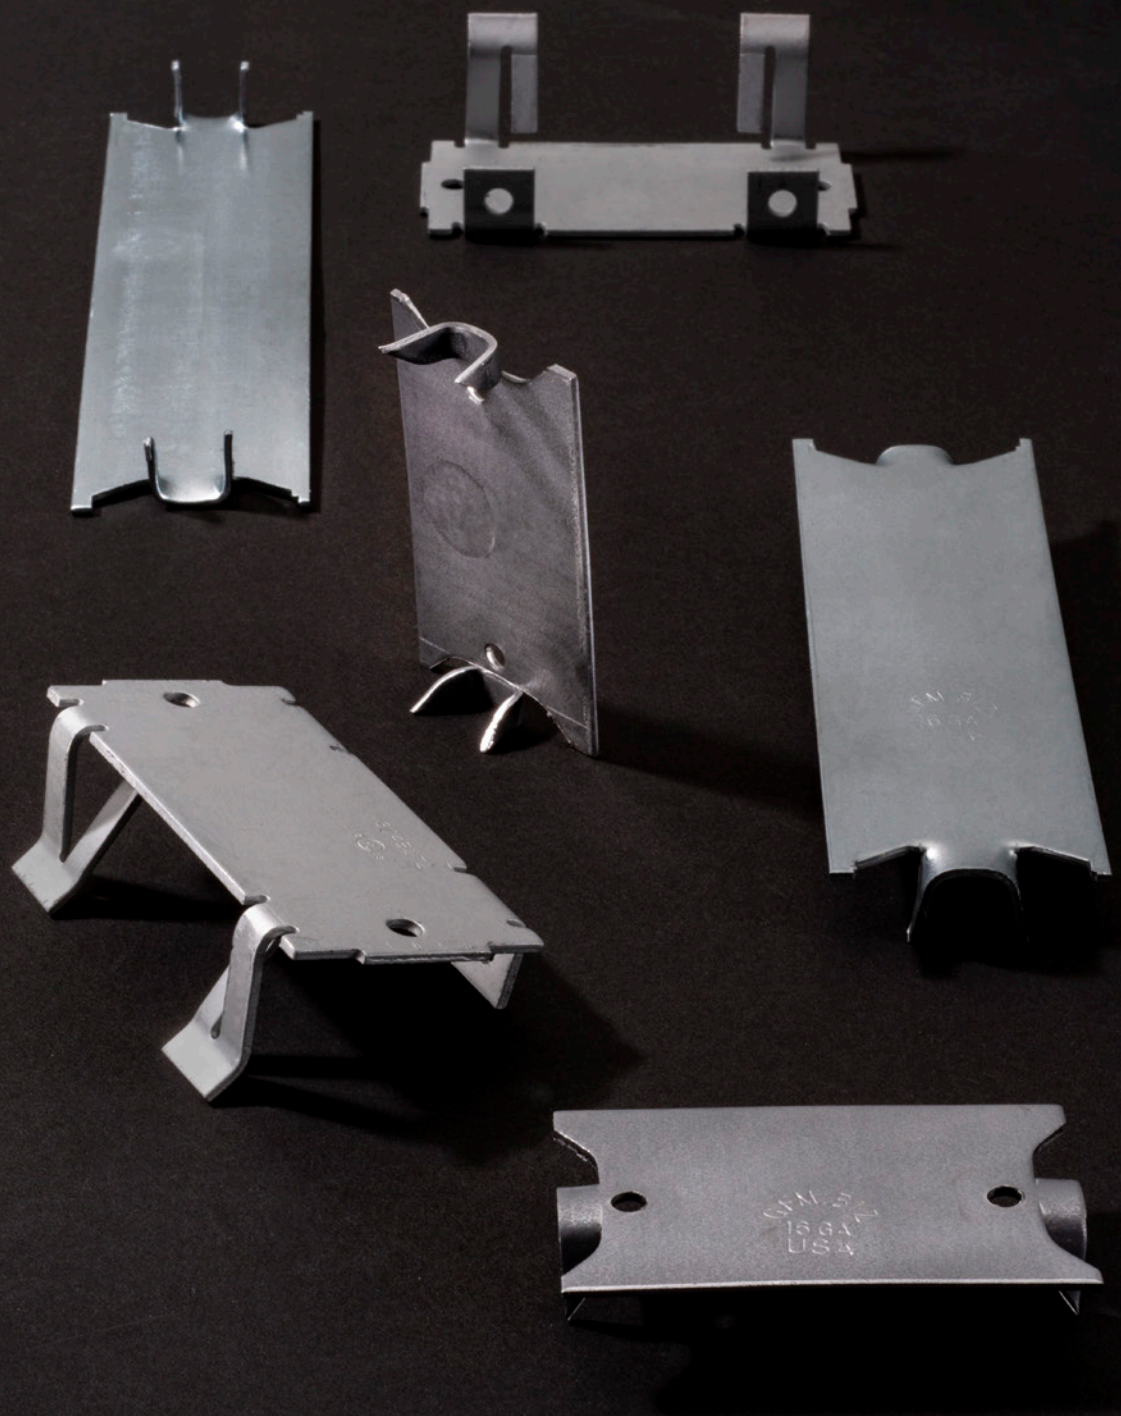

PRESS-ON NAIL PLATE



304B2TZ





c UL us LISTED

PART #	A	B	C	D	BOX QTY.
304B2TZ	3.13"	1.50"	.547"	1.02"	100

FEATURES
- Easy no-tool installation
- For metal or wood studs
- Holes provided on clip legs to screw into stud for additional support

APPLICATION
- Press-on nail plates protect electrical and mechanical gear routed through studs

MATERIAL/FINISH
- Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



HANGING AND SUPPORT

NAIL PLATES



SP-3



SP-6



188



43-50

FEATURES


- 16-gauge thickness
- Hammer-on installation
- Spiked ends for wood studs
- Clip tabs for metal studs

APPLICATION

- Use to protect wire and cable from nails or screws in wood stud construction
- Mounts on outside of the stud face

MATERIAL/FINISH

- Steel





PART #	STUD MATERIAL	ATTACHMENT	PLATE SIZE	A	B	C	BOX QTY.
SP-3	WOOD	SPIKE	1-1/2" x 2-1/2"	2.50"	1.50"	.0625"	200
SP-6	WOOD	SPIKE	1-1/2" x 6" x 1/16"	5"	1.50"	.0625"	100
187A	WOOD	SPIKE	3-1/2" x 6" x 1/16"	6"	3.50"	.0625"	50
188	WOOD	SPIKE	1-1/2" x 5" x 1/16"	6"	1.50"	.0625"	100
189B	WOOD	SPIKE	1-1/2" x 2-1/2" x 1/16"	2.50"	1.50"	.0625"	50
43-50	WOOD	SPIKE	1-1/2" x 2-1/2"	2.50"	1.50"	.0625"	250
43-100	WOOD	SPIKE	1-1/2" x 2-1/2"	2.50"	1.50"	.0625"	100
43-5P	WOOD	SPIKE	1-1/2" x 2-1/2" (PAIL PACK)	2.50"	1.50"	.0625"	500

DATACOM/ LOW VOLTAGE

Wire management systems that support data and low voltage cables to the structure

CABLE SUPPORT SYSTEMS

LOW VOLTAGE CABLE MANAGEMENT

CLIPS

CABLE SUPPORT SYSTEMS



J-HOOKS

WALL MOUNT WITH MOUNTING HOLES



CAT12TZ



CAT21TZ



JHK-32SS

FEATURES

- J-Hooks eliminate the problem of point loads that can cause band width damage to sensitive cables such as fiber optic, CAT 5E, 6, 7 or many others
- Continuous wide base radius design supports the natural bends and curves of cable
- Built-in cable retainer bar
- .264" diameter mounting hole

APPLICATION


- Wall mount J-Hook cable supports can be attached to a wide variety of wall surfaces
- Southwire J-Hooks are an inexpensive alternative to cable trays
- J-Hooks provide support to sensitive voice and data cables without causing stress


MATERIAL/FINISH

- Steel/Galvanized or Stainless steel

CERTIFICATIONS

- * cULus Listed
- **UL listed

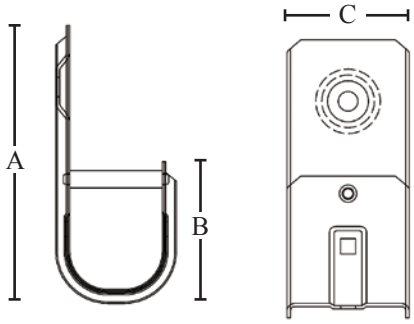



c UL us LISTED UL LISTED

PART #	HOOK DIAMETER	MATERIAL	STATIC LOAD (LBS.)	CAT 5E CABLE CAPACITY	A	B	C	BOX QTY.
CAT12TZ*	3/4"	GALVANIZED STEEL	60	16	3.23"	1.65"	.866"	100
CAT21TZ*	1-5/16"		60	50	3.62"	1.79"	1.64"	40
CAT32TZ*	2"		60	90	4.37"	2.50"	1.64"	50
CAT64TZ*	4"		60	330	4.48"	2.50"	1.91"	25
JHK-84**	6"		60	450	6.93"	3.75"	2.02"	25
JHK-12SS**	3/4"	STAINLESS STEEL	60	20	3.23"	1.65"	.866"	50
JHK-21SS**	1-5/16"		60	40	3.62"	1.79"	1.64"	50
JHK-32SS**	2"		60	80	4.37"	2.50"	1.64"	50
JHK-64SS**	4"		60	300	4.48"	2.50"	1.91"	25

Load Limits apply to fastener only. Anchor must be evaluated separately


*cULus Listed, **UL listed, JHK-84- no UL

J-HOOKS WITH SPRING

STEEL BEAM CLAMP



CAT21BCTZ

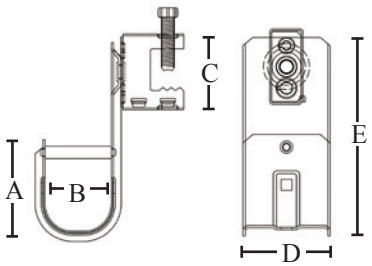

c UL us LISTED

PART #	HOOK DIAMETER	A	B	C	D	E	BOX QTY.
CAT12BCTZ	3/4"	1.65"	.748"	1.42"	.866"	3.23"	40
CAT21BCTZ	1-5/16"	1.79"	1.24"	1.42"	1.64"	3.62"	50
CAT32BCTZ	2"	2.50"	1.99"	1.42"	1.64"	4.37"	50

FEATURES

- Available in multiple sizes
- Alternative cable management solution to complex cable trays
- J-Hooks are designed with round edges to provide proper bend radius
- Beam clamp screw-on attachment allows for easy repositioning of the J-Hook

APPLICATION

- J-Hooks with screw-on beam clamp feature allows the J-Hook to easily attach to beam flanges
- J-Hooks provide support for data cables: fiber optic, inner-duct and low voltage

MATERIAL/FINISH

- Clamp: Spring Steel/ GEOSEAL™
- J-Hook: Steel/Galvanized

CERTIFICATIONS


- UL Standard: UL 2239




J-HOOKS WITH BEAM CLAMP



JHK-21-BC





PART #	HOOK DIAMETER	A	B	C	BOX QTY.
JHK-21-BC	1-5/16"	3.62"	1.63"	1.64"	50
JHK-32-BC	2"	4.37"	1.63"	1.64"	50
JHK-64-BC	4"	4.48"	1.63"	1.91"	25

FEATURES

- J-Hooks eliminate the problem of point loads that can cause band width damage to sensitive cables such as fiber optic, CAT 5E, 6, 7 or many others
- Continuous wide base radius design supports the natural bends and curves of cable
- Built-in cable retainer bar

APPLICATION

- J-Hook cable support with stamped steel beam clamp can be attached to a wide variety of flange edges or beams
- Southwire J-Hooks are an inexpensive alternative to cable trays
- J-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH

- Steel/Zinc plated

J-HOOKS, BEAM/EDGE MOUNT


HAMMER-ON CLIP



JHK-12-HO



CAT3224TZ





FEATURES

- J-Hooks eliminate the problem of point loads that can cause band width damage to sensitive cables such as fiber optic, CAT 5E, 6, 7 or many others
- Continuous wide base radius design supports the natural bends and curves of cable
- Built-in cable retainer bar
- 360° rotation of J-Hook

APPLICATION

- J-Hook cable supports with hammer-on beam edge clip can be attached to a wide variety of flange edges or beams
- Southwire J-Hooks are an inexpensive alternative to cable trays
- J-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH

- Clamp: Spring Steel/ GEOSEAL™
- J-Hook: Steel/Galvanized

CERTIFICATIONS

- UL Standard: UL 2239

UL LISTED c UL US LISTED 360°

PART #	BEAM FLANGE THICKNESS	HOOK DIAMETER	CAT5E CABLE CAPACITY	A	B	C	D	E	BOX QTY.
JHK-12-HO**	1/8" TO 1/4"	3/4"	20	.748"	1.65"	1.06"	.866"	4.29"	50
JHK-12-HO516**	5/16" TO 1/2"	3/4"	20	.748"	1.65"	1.34"	.866"	4.57"	50
JHK-12-HO916**	9/16" TO 3/4"	3/4"	20	.748"	1.65"	1.63"	.866"	4.86"	50
JHK-21-HO**	1/8" TO 1/4"	1-5/16"	40	1.24"	1.79"	1.06"	1.64"	4.68"	50
JHK-21-HO516**	5/16" TO 1/2"	1-5/16"	40	1.24"	1.79"	1.34"	1.64"	4.96"	50
JHK-21-HO916**	9/16" TO 3/4"	1-5/16"	40	1.24"	1.79"	1.63"	1.64"	5.25"	50
CAT3224TZ*	1/8" TO 1/4"	2"	80	1.99"	2.5"	1.06"	1.64"	5.43"	50
JHK-32-HO516**	5/16" TO 1/2"	2"	80	1.99"	2.5"	1.34"	1.64"	5.71"	50
JHK-32-HO916**	9/16" TO 3/4"	2"	80	1.99"	2.5"	1.63"	1.64"	6"	50
JHK-64-HO**	1/8" TO 1/4"	4"	300	4.0"	4.69"	1.06"	1.91"	7.99"	25
JHK-64-HO516**	5/16" TO 1/2"	4"	300	4.0"	4.69"	1.34"	1.91"	8.27"	25
JHK-64-HO916**	9/16" TO 3/4"	4"	300	4.0"	4.69"	1.63"	1.91"	8.56"	25

*cULus Listed, **UL listed


J-HOOKS WITH CLIP



JHK-21-BW2



CAT124Z34TZ



LISTED

c LISTED us

PART #	HOOK DIAMETER	ROD SIZE	A	B	C	BOX QTY.
CAT124Z34TZ*	3/4"	1/4"	3.23"	1.65"	.866"	40
CAT126Z34TZ*	3/4"	3/8"	4.171"	1.65"	.866"	50
JHK-21-BW2**	1-5/16"	1/4"	4.561"	1.79"	1.64"	50
JHK-21-BW6**	1-5/16"	3/8"	4.561"	1.79"	1.64"	50
CAT324Z34TZ*	2"	1/4"	5.311"	2.50"	1.64"	50
CAT326Z34TZ*	2"	3/8"	5.311"	2.50"	1.64"	50
JHK-64-BW2**	4"	1/4"	5.421"	2.50"	1.91"	25

*cULus Listed | **UL listed

FEATURES
- Easy no-tool installation
- Available in multiple sizes
- J-Hooks are designed with round edges to provide proper bend radius
- Rod/wire clip feature allows for easy repositioning of J-Hook

APPLICATION
- J-Hook with clip feature allows the J-Hook to easily attach to beams, threaded rods, or wires
- J-Hooks provide support for data cables: fiber optic, inner-duct, and low voltage

MATERIAL/FINISH
- Clip: Spring Steel/ GEOSEAL™
- J-Hook: Steel/Galvanized

CERTIFICATIONS
- UL Standard: UL 2239



J-HOOKS, MAGNETIC MOUNT



JHK-12MAG



PART #	MATERIAL	HOOK SIZE	CAT5E CABLE CAPACITY	PULL-OUT STRENGTH	BOX QTY.
JHK-12MAG	ZINC PLATED STEEL	3/4"	20	90 LBS.	50
JHK-21MAG		1-5/16"	40	90 LBS.	50
JHK-32MAG		2"	80	90 LBS.	50
JHK-64MAG		4"	300	90 LBS.	25
JHK-84MAG		6"	450	90 LBS.	25

FEATURES
- J-Hooks eliminate the problem of point loads that can cause band width damage to sensitive cables such as fiber optic, CAT 5E, 6, 7 or many others
- Continuous wide base radius design supports the natural bends and curves of cable
- Built-in cable retainer bar

APPLICATION
- Magnetic wall mount J-Hook cable supports can be attached to a wide variety of metal wall surfaces
- Southwire J-Hooks are an inexpensive alternative to cable trays
- J-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH
- Steel/Zinc plated

J-HOOKS OVERHEAD MOUNT



JHK-12-AB JHK-21-ABSS



LISTED

PART #	MATERIAL	HOOK SIZE	CAT5E CABLE CAPACITY	BOX QTY.
JHK-12-AB	ZINC PLATED STEEL	3/4"	20	50
JHK-21-AB		1-5/16"	40	50
JHK-32-AB		2"	80	50
JHK-64-AB		4"	300	25

FEATURES

- J-Hooks eliminate the problem of point loads that can cause band width damage to sensitive cables such as fiber optic, CAT 5E, 6, 7 or many others
- Continuous wide base radius design supports the natural bends and curves of cable
- Built-in cable retainer bar
- .26" diameter mounting hole

APPLICATION

- Overhead mount J-Hook cable supports can be attached to a wide variety of overhead surfaces or combined with other Southwire spring steel hardware
- Southwire J-Hooks are an inexpensive alternative to cable trays
- J-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH

- Steel/Zinc plated or 316 Stainless steel

CERTIFICATIONS

- UL Listed (for Zinc plated Steel)

MAGNETIC OVERHEAD MOUNT J-HOOKS



JHK-12ABMAG



PART #	MATERIAL	HOOK SIZE	CAT5E CABLE CAPACITY	PULL-OUT STRENGTH	BOX QTY.
JHK-12ABMAG	ZINC PLATED STEEL	3/4"	20	90 LBS.	50
JHK-21ABMAG		1-5/16"	40	90 LBS.	50
JHK-32ABMAG		2"	80	90 LBS.	50
JHK-64ABMAG		4"	300	90 LBS.	25

FEATURES

- J-Hooks eliminate the problem of point loads that can cause band width damage to sensitive cables such as fiber optic, CAT 5E, 6, 7 or many others
- Continuous wide base radius design supports the natural bends and curves of cable
- Built-in cable retainer bar

APPLICATION

- Magnetic overhead mount J-Hook cable supports can be attached to a wide variety of metal overhead surfaces
- Southwire J-Hooks are an inexpensive alternative to cable trays
- J-Hooks provide support to sensitive voice and data cables without causing stress


MATERIAL/FINISH

- Steel/Zinc plated

FLOOR SUPPORT J-HOOK



CAT21CD1BTZ

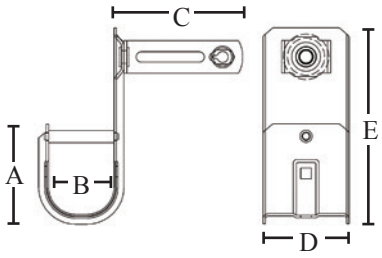

FEATURES
- J-Hooks are designed with round edges to provide proper bend radius
- 1-5/16" diameter J-Hook


APPLICATION
- J-Hooks provide support for data cables: fiber optic, inner duct and low voltage
- Pipe anchor clamp feature allows the J-Hook to easily attach to floor supports

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Standard: UL 2239

c UL us LISTED

PART #	A	B	C	D	E	BOX QTY.
CAT21CD1BTZ	1.79"	1.24"	2.26"	1.64"	3.62"	50



MULTI-RUN OVERHEAD MOUNT J-HOOKS



JHT-212



JHT-214



JHT-216

FEATURES
- J-Hooks eliminate the problem of point loads that can cause band width damage to sensitive cables such as fiber optic, CAT5E, 6, 7 or many others
- Continuous wide base radius design supports the natural bends and curves of cable
- Built-in cable retainer bar
- .26" diameter mounting hole

APPLICATION
- Overhead mount multi-run J-Hook cable supports can be attached to a wide variety of overhead surfaces.
- Southwire J-Hooks are an inexpensive alternative to cable trays
- J-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH
- Steel/Zinc plated

PART #	NUMBER OF HOOKS	HOOK DIAMETER	CAT5E CABLE CAPACITY	BOX QTY.
JHT-212	2	1-5/16"	40 EACH HOOK	25
JHT-214	4	1-5/16"	40 EACH HOOK	25
JHT-216	6	1-5/16"	40 EACH HOOK	25
JHT-322	2	2"	80 EACH HOOK	25
JHT-324	4	2"	80 EACH HOOK	25
JHT-326	6	2"	80 EACH HOOK	25
JHT-642	2	4"	300 EACH HOOK	10
JHT-644	4	4"	300 EACH HOOK	10
JHT-646	6	4"	300 EACH HOOK	10

G-HOOKS, WALL MOUNT



CAT150-WM

c UL us LISTED

FEATURES
- Provides a smooth surface for cables
- .28" diameter mounting hole

APPLICATION
- Wall mount G-Hook cable supports can be attached to a wide variety of wall surfaces and are a cost effective alternative to J-Hooks
- G-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIONS
- cULus Listed

PART #	MATERIAL	LOOP SIZE	CAT5E CABLE CAPACITY	BOX QTY.
CAT150-WM	ZINC PLATED STEEL	1-1/2"	14	50
CAT200-WM		2"	24	50
CAT400-WM		4"	48	25

MAGNETIC MOUNT



CAT150-WMAG

FEATURES
- Provides a smooth surface for cables

APPLICATION
- Magnetic mount G-Hook cable supports can be attached to a wide variety of metal wall surfaces and are a cost effective alternative to J-Hooks
- G-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH
- Steel/Zinc plated

PART #	MATERIAL	LOOP SIZE	CAT5E CABLE CAPACITY	PULL-OUT STRENGTH	BOX QTY.
CAT150-WMAG	ZINC PLATED STEEL	1-1/2"	14	90 LBS.	50
CAT200-WMAG		2"	24	90 LBS.	50
CAT400-WMAG		4"	48	90 LBS.	25

G-HOOKS, OVERHEAD MOUNT



CAT150-AB

c UL us LISTED

PART #	MATERIAL	LOOP SIZE	CAT5E CABLE CAPACITY	BOX QTY.
CAT150-AB	ZINC PLATED STEEL	1-1/2"	14	50
CAT200-AB		2"	24	50
CAT400-AB		4"	48	25

FEATURES
- Provides a smooth surface for cables
- .28" diameter mounting hole

APPLICATION
- Overhead mount G-Hook cable supports can be attached to a wide variety of overhead surfaces and are a cost effective alternative to J-Hooks
- G-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIIONS
- cULus

MAGNETIC MOUNT



CAT150-MAG

PART #	MATERIAL	LOOP SIZE	CAT5E CABLE CAPACITY	PULL-OUT STRENGTH	BOX QTY.
CAT150-MAG	ZINC PLATED STEEL	1-1/2"	4	90 LBS.	50
CAT200-MAG		2"	24	90 LBS.	50
CAT400-WMAG		4"	48	90 LBS.	25

FEATURES
- Provides a smooth surface for cables

APPLICATION
- Overhead magnetic mount G-Hook cable supports can be attached to a wide variety of metal overhead surfaces and are a cost effective alternative to J-Hooks
- G-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH
- Steel/Zinc plated

1/4"-20 THREADED STUD



CAT150

c UL us LISTED

PART #	MATERIAL	LOOP SIZE	CAT5E CABLE CAPACITY	BOX QTY.
CAT150	ZINC PLATED STEEL	1-1/2"	14	50
CAT200		2"	24	50
CAT400		4"	48	25

FEATURES
- Provides a smooth surface for cables
- 1" approximate stud length

APPLICATION
- Overhead 1/4"-20 stud mount G-Hook cable supports can be attached to a wide variety of overhead surfaces and are a cost effective alternative to J-Hooks
- G-Hooks provide support to sensitive voice and data cables without causing stress

MATERIAL/FINISH
- Steel/Zinc plated


LOW VOLTAGE CABLE MANAGEMENT



WOOD THREADED BRIDLE RINGS



4BRT32WSTZ



FEATURES
- Available in multiple ring diameters
- Wood screw threads allow rings to be screwed into wood surfaces

APPLICATION
- Threaded bridle rings are used to support communication cables and other low voltage wires
- Southwire bridle rings allow a quick and inexpensive way to support non data sensitive wires and cables from structural members

MATERIAL/FINISH
- Steel/Galvanized

CERTIFICATIONS
- UL Standard: UL 2239



c UL us LISTED UL LISTED

PART #	DIAMETER	THREAD	CAT5E CABLE CAPACITY	A	B	C	BOX QTY.
BR-100-WS*	1"	#14	20	2.72"	1.65"	.512"	100
4BRT20WSTZ**	1-1/4"	#14	30	2.60"	1.65"	.512"	100
BR-150-WS*	1-1/2"	#14	42	3.22	1.91	.512"	100
4BRT32WSTZ**	2"	#14	73	3.70"	2.42"	.571"	100

*UL listed | **cULus listed

MACHINE THREADED BRIDLE RINGS



4BRT20TZ



BR-501024



BR-125-SS

FEATURES

- Available in multiple ring diameters
- Machine screw threads allow rings to be screwed into other fasteners and clamps

APPLICATION


- Threaded bridle rings are used to support communication cables and other low voltage wires
- Southwire bridle rings allow a quick and inexpensive way to support non data sensitive wires and cables from structural members

MATERIAL/FINISH

- Steel/Galvanized or 316 Stainless steel

CERTIFICATIONS

- UL Standard: UL 2239





UL LISTED c UL us LISTED


PART #	MATERIAL	DIAMETER	THREAD SIZE	CAT5E CABLE CAPACITY	A	B	C	BOX QTY.
BR-501024*	ZINC PLATED STEEL	1/2"	#10 – 24	5	2.11"	1.06	.512"	100
2BRT12TZ**		3/4"	#10 – 24	10	1.97"	1.10"	.512"	100
BR-1001024*		1"	#10 – 24	20	2.72"	1.65"	.512"	100
2BRT20TZ**		1-1/4"	#10 – 24	30	2.62"	1.57"	.512"	100
BR-1501024*		1-1/2"	#10 – 24	42	3.22"	1.91"	.512"	100
2BRT32TZ**		2"	#10 – 24	73	3.31"	2.46"	.571"	100
4BRT20TZ**		1-1/4"	1/4" – 20	30	2.74"	1.65"	.512"	100
BR-150*		1-12"	1/4" – 20	42	3.22"	1.91"	.512"	100
4BRT32TZ**		2"	1/4" – 20	73	2.56"	3.57"	.571"	100
4BRT64TZ**		4"	1/4" – 20	250	6.51"	4.45"	.689"	50
BR-125-SS*	316 STAINLESS STEEL	1-1/4"	1/4" – 20	30	2.60"	1.65"	.512"	100
BR-150-SS*		1-1/2"	1/4" – 20	42	3.22"	1.91"	.512"	100
BR-200-SS*		2"	1/4" – 20	73	2.56"	3.57"	.571"	100
BR-400-SS*		4"	1/4" – 20	250	6.51"	4.45"	.689"	50

*UL listed | **cULus listed

METAL THREADED RINGS
WITH NONMETALLIC SADDLE



BR-150-WH

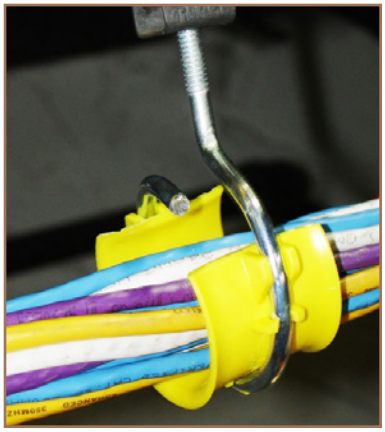

FEATURES
- Nonmetallic saddle support provides additional support under cable

APPLICATION
- Threaded bridle rings are used to support communication cables and other low voltage wires
- Southwire bridle rings allow a quick and inexpensive way to support non data sensitive wires and cables from structural members

MATERIAL/FINISH
- Steel/Zinc plated
- Plastic saddle

CERTIFICATIONS
- UL Listed (BR-200-WH and BR-400-WH)

PART #	MATERIAL	LOOP SIZE	LEG THREAD	CAT5E CABLE CAPACITY	BOX QTY.
BR-150-WH	ZINC PLATED STEEL	1-1/2"	1/4" – 20	42	100
BR-200-WH		2"	1/4" – 20	73	100
BR-400-WH		4"	1/4" – 20	250	25

WOOD THREADED RINGS
WITH NONMETALLIC SADDLE



BR-150-WHWS



FEATURES
- Nonmetallic saddle support provides additional support under cable

APPLICATION
- Threaded bridle rings are used to support communication cables and other low voltage wires
- Southwire bridle rings allow a quick and inexpensive way to support non data sensitive wires /and cables from structural members

MATERIAL/FINISH
- Steel/Zinc plated
- Plastic saddle


PART #	MATERIAL	LOOP SIZE	CAT5E CABLE CAPACITY	BOX QTY.
BR-150-WHWS	ZINC PLATED STEEL	1-1/2"	42	100
BR-200-WHWS		2"	73	100

SNAP-ON DATA SADDLE ONLY

FOR BRIDLE RINGS, NONMETALLIC



BRS150

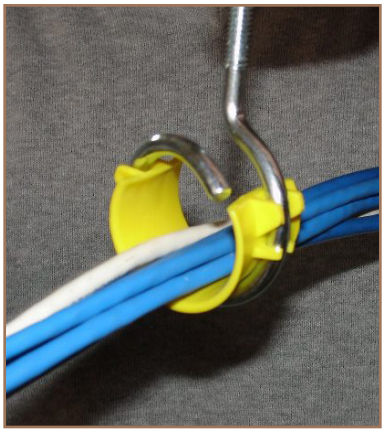

FEATURES
- Snap-on design for quick installation
- Plenum Rated

APPLICATION
- Nonmetallic saddle support work with Southwire 1-1/2"and 2" bridle rings and provides additional support under cable

MATERIAL/FINISH
- Plastic/Yellow

CERTIFICATIONS
- UL Listed

PART #	MATERIAL	FITS RING SIZE	BOX QTY.
BRS150	PLENUM RATED SADDLE	1-1/2"	50
BRS200		2"	50

BRIDLE RINGS

SCREW MOUNT LOOP HOLE



BR-150NP

FEATURES
- .26" diameter screw opening

APPLICATION
- Screw-mount loop hole mount bridle rings are used to support communication cables and other low voltage wires on overhead surface mount applications
- Southwire bridle rings allow a quick and inexpensive way to support non data sensitive wires and cables from structural members

MATERIAL/FINISH
- Steel/Zinc plated

CERTIFICATIONS
- UL Listed

PART #	MATERIAL	LOOP SIZE	CAT5E CABLE CAPACITY	BOX QTY.
BR-150NP	ZINC PLATED STEEL	1-1/2"	42	100
BR-200NP		2"	73	100
BR-400NP		4"	250	50

BRIDLE RINGS, QUICK-SHOT FOR STEEL OR CONCRETE

WITH NONMETALLIC DATA SADDLE



BR-150-SSCWH



BR-150-SSC

FEATURES

- Compatible with all powder and gas guns
- Pre-assembled ready to shoot
- Nonmetallic saddle support provides additional support under cable

APPLICATION

- "Quick-shot" mount bridle rings are used to support communication cables and other low voltage wires on overhead surface mount applications
- Southwire bridle rings allow a quick and inexpensive way to support non data sensitive wires and cables from structural members

MATERIAL/FINISH

- Steel/Zinc plated

PART #	MATERIAL	LOOP SIZE	CAT5E CABLE CAPACITY	BOX QTY.
BR-150-SSCWH	ZINC PLATED STEEL	1-1/2"	42	100
BR-150-SSC		1 1/2"	42	100
BR-200-SSC		2"	73	100
BR-200-SSCWH		2"	73	100
BR-400-SSC		4"	250	50

BRIDLE RINGS, HOLLOW-WALL MOUNT

WITH EXPANSION TOGGLE



BR-150-TW

LISTED

FEATURES

- 3-1/2" long leg
- Pop-out toggle-wing to secure in place behind wall surface

APPLICATION

- Hollow wall mount bridle rings are used to support communication cables and other low voltage wires
- Southwire bridle rings allow a quick and inexpensive way to support non data sensitive wires and cables from structural members

MATERIAL/FINISH

- Steel/Zinc plated

CERTIFICATIONS

- UL Listed

PART #	MATERIAL	LOOP SIZE	CAT5E CABLE CAPACITY	BOX QTY.
BR-150-TW	ZINC PLATED STEEL	1-1/2"	42	50
BR-200-TW		2"	73	50
BR-400-TW		4"	250	25

BRIDLE RINGS
MAGNETIC MOUNT



BRM150-HD



BRM75WH

FEATURES
- Easy to mount

APPLICATION
- Magnetic mount bridle rings are used to support communication cables and other low voltage wires on metal surface mount applications
- Southwire bridle rings allow a quick and inexpensive way to support non data sensitive wires and cables from structural members

MATERIAL/FINISH
- Steel/Zinc plated

PART #	MATERIAL/COLOR	LOOP SIZE	CAT5E CABLE CAPACITY	PULL-OUT STRENGTH	BOX QTY.
BRM75BK	STEEL, PAINTED BLACK	3/4"	10	15 LBS.	100
BRM75WH	STEEL, PAINTED WHITE	3/4"	10	15 LBS.	100
BRM100BK	STEEL, PAINTED BLACK	1"	20	15 LBS.	100
BRM100WH	STEEL, PAINTED WHITE	1"	20	15 LBS.	100
BRM125BK	STEEL, PAINTED BLACK	1-1/4"	30	15 LBS.	100
BRM125WH	STEEL, PAINTED WHITE	1-1/4"	30	15 LBS.	100
BRM150-HD	ZINC PLATED STEEL	1-1/2"	42	90 LBS.	50
BRM200-HD		2"	73	90 LBS.	50
BRM400-HD		4"	250	90 LBS.	50

DISTRIBUTION RINGS
SURFACE MOUNT, METALLIC



DST-200

FEATURES
- Distribution rings have a smooth surface that prevents cables from being damaged
- .22" diameter mounting holes

APPLICATION
- Distribution rings are used when support for multiple vertical or horizontal cable runs is required on walls or ceilings

MATERIAL/FINISH
- Aluminum
- Steel/Zinc plated

PART #	MATERIAL	CABLE I.D.	CAT5E CABLE CAPACITY	BOX QTY.
DST-200	ALUMINUM	2"	75	50
DST-300		3"	150	50
DST-500		5"	250	25
DST-800	ZINC PLATED STEEL	8"	425	25
DST-1200		12"	550	25

DISTRIBUTION RINGS,
SURFACE MOUNT, METALLIC



17AB

PART #	MATERIAL/COLOR	SUPPORT LOOP	BOX QTY.
17AB	STEEL, PAINTED BLACK	7/8" X 1-1/2"	100
17BB		1" X 1-7/8"	100
17CB		1-3/8" X 2-3/4"	100

FEATURES
- Distribution rings have a smooth non-conductive surface that prevents cables from being damaged
- .175" diameter mounting holes

APPLICATION
- Support loop distribution rings are used when support for small cable runs is required on walls or communication boards and racks.
- Commonly used on communication back boards and other flat surfaces to sort and structure wires.

MATERIAL/FINISH
- Steel/Black paint

WIREBRACKET™ CABLE SUPPORT DEVICE
NONMETALLIC



WB200

PART #	MATERIAL	TRADE SIZE	BOX QTY.
WB200	NYLON, BLACK	2"	25

FEATURES
- Cable tie installation holes in each corner of ring to separate groups of cables
- Smooth interior surface
- Mounting holes accept tap cons, 1/4" bolts for beam clamps and light Hilti loads (1.5" nail with fender washer)
- MC does not require cable ties when 10 or less cables in ring

APPLICATION
- Dual purpose line voltage and low voltage cable support device for residential or commercial use

MATERIAL/FINISH
- Nylon/Black

CERTIFICATIONS
- UL Listed

DISTRIBUTION RINGS

SURFACE MOUNT, NONMETALLIC



DST-200-P

PART #	MATERIAL	CABLE I.D.	CAT5E CABLE CAPACITY	BOX QTY.
DST-200-P	GRAY PLASTIC	2"	75	50
DST-300-P		3"	150	50
DST-500-P		5"	250	25

FEATURES
- Distribution rings have a smooth surface that prevents cables from being damaged
- .21" diameter mounting holes

APPLICATION
- Distribution rings are used when support for multiple vertical or horizontal cable runs is required on walls or ceilings

MATERIAL/FINISH
- Plastic/Gray

OPEN DISTRIBUTION RINGS

SURFACE MOUNT, METALLIC



ODR-250

PART #	MATERIAL	DIMENSIONS (H X W)	BOX QTY.
ODR-250	DIE-CAST ALUMINUM	2" X 2"	50
ODR-350		1-1/2" X 3"	50
ODR-375		3" X 3"	50

FEATURES
- Distribution rings have a smooth surface that prevents cable damage
- .22" diameter mounting holes

APPLICATION
- Drop in/open style distribution rings are used when support is needed for cables that must remain accessible

MATERIAL/FINISH
- Aluminum/Die-Cast

BACKBOARD SPOOLS

NONMETALLIC ABS



WDS

PART #	MOUNTING	DIMENSIONS	COLOR	BOX QTY.
WDS	MOUNTING HOLE ONLY	2.91" TALL	IVORY	100
WDSWS	MOLDED IN WOOD SCREW	2.91" TALL	GRAY	100
WDSMS	MOLDED IN 12-24 MACHINE SCREW	2.91" TALL	BLACK	100

FEATURES
- Smooth wire contact surface
- Sold with or without mounting screw

APPLICATION
- Wire distribution spools are used to neatly organize internal pairs or wires as they are being terminated on communication backboards and racks that are wood, steel or concrete

MATERIAL/FINISH
- Plastic/White

DRIVE RINGS, NAIL-ON MOUNT

GALVANIZED STEEL



DRV-1/2

PART #	LOOP SIZE	CAT5E CABLE CAPACITY	BOX QTY.
DRV-1/2	1/2"	5	50
DRV-5/8	5/8"	10	25
DRV-7/8	7/8"	30	25
DRV-1-1/4	1-1/4"	65	25
DRV-1-1/2	1-1/2"	90	25

FEATURES

- Smooth wire contact surface
- .21" diameter mounting holes

APPLICATION

- Drive rings are used to support communication cables and other low voltage wires
- Quick nail-on drive rings with looped harness saves time and provides a very economical support in wet or dry locations
- Drive rings may also be used on wood surfaces or with beam clamps that accept drive pins

MATERIAL/FINISH

- Steel/Galvanized

DRIVE RINGS, WITH SCREW MOUNT LOOP HOLE

GALVANIZED STEEL



DRS-1/2

PART #	SIZE	CAT5E CABLE CAPACITY	BOX QTY.
DRS-1/2	1/2"	5	50
DRS-5/8	5/8"	10	25
DRS-7/8	7/8"	30	25
DRS-1-1/4	1-1/4"	65	25
DRS-1-1/2	1-1/2"	90	25

FEATURES

- Smooth wire contact surface
- Screw-on drive rings work with most common drywall screws and threaded fasteners


APPLICATION

- Screw-on drive rings are used to support and secure wires and cables in tight spaces where hammer-on drive rings will not work

MATERIAL/FINISH

- Steel/Galvanized


CLIPS

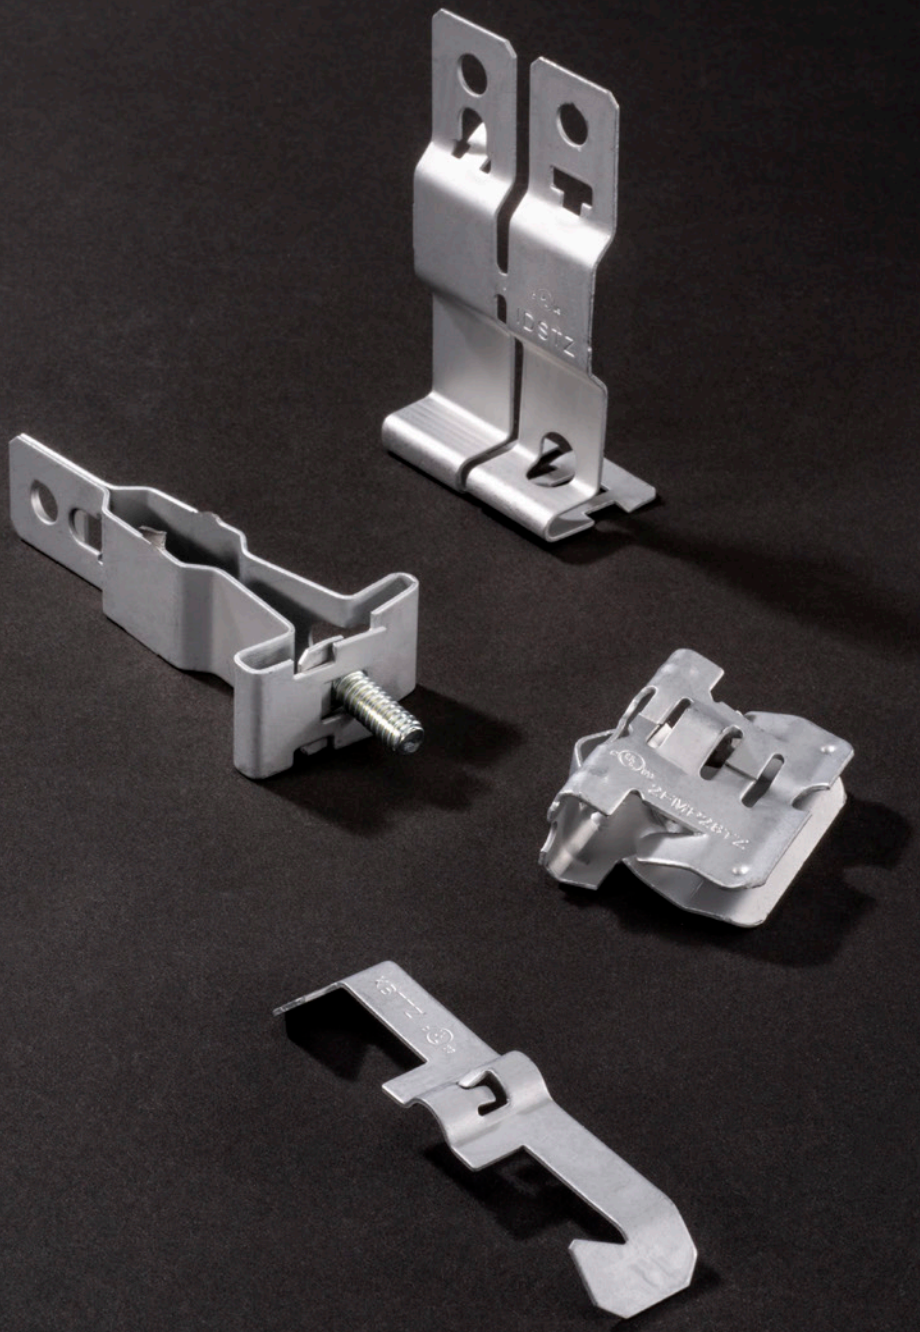

MULTI-PURPOSE SUPPORT CLIP



2FMP28TZ





c UL us LISTED


PART #	A	B	C	BOX QTY.
2FMP28TZ	1.44	1.62	.618	100

FEATURES
- Hammer-on attachment
- Fits flanges from 1/8" to 1/2"
- Accommodates 1/4" – 20 or #10 – 24 threaded bridle rings

APPLICATION
- Attaches to flanges to provide an anchor for bridle rings and other hardware

MATERIAL/FINISH
- Spring Steel/GEOSEAL™


CERTIFICATIONS
- UL Standard: UL 2239

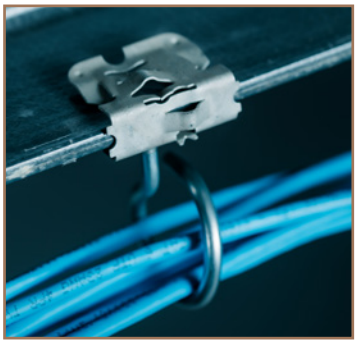

TRAY CLIP



KBTTZ



c UL us LISTED

PART #	A	B	C	BOX QTY.
KBTTZ	2.90"	.626"	.295"	100

No load rating, for positioning only.

FEATURES
- Easy no-tool installation
- Supports 3/16" to 5/16" wire

APPLICATION
- Tray Clips attach cable management trays to struts
- Use two clips per strut for a 12" basket and for each additional 6" add another clip

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



ACOUSTICAL/ CEILING

Fittings that help position electrical networks to the T-Grid structure

ELECTRICAL SUPPORT SYSTEMS

FIXTURE SUPPORTS


ELECTRICAL SUPPORT SYSTEMS



THREADED T-GRID CLIP

BOTTOM MOUNT





ATA4ITZ

c UL us LISTED

PART #	A	B	C	BOX QTY.
ATA4ITZ	2.14"	.984"	1.12"	100


No load rating, for positioning only. Additional support required per NEC 300.11.

FEATURES
- Easy no-tool installation
- 1/4" threaded hole

APPLICATION
- Threaded T-Grid Clips attach to acoustical T-Bar to provide a method of securing boxes, conduit, or bridle rings

MATERIAL/FINISH
- Spring Steel/GEOSEAL™


CERTIFICATIONS
- UL Standard: UL 2239



THREADED T-GRID CLIP

SIDE MOUNT





ATS4ITZ

c UL us LISTED

PART #	A	B	C	BOX QTY.
ATS4ITZ	3.20	.984	.374	100


No load rating, for positioning only. Additional support required per NEC 300.11.

FEATURES
- Easy no-tool installation
- 1/4" threaded hole
- Side mount method of hardware attachment

APPLICATION
- Threaded T-Grid Clip attaches to acoustical T-Bar for mounting of boxes, conduit, or bridle rings

MATERIAL/FINISH
- Spring Steel/GEOSEAL™


CERTIFICATIONS
- UL Standard: UL 2239




CONDUIT TO T-GRID SNAP CLAMPS



812MATATZ






FEATURES
- Easy no-tool installation
- 360˚ rotating clip
- Top and side mounting available
- Attaches conduit or MC/AC cable to T-Grid

APPLICATION
- Conduit to T-Grid Clamps provide a fast and easy solution to position conduit or MC/AC cables above T-Grids
- Side mount option allows conduit attachment in both the horizontal and vertical directions

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



c UL us LISTED

360°


PART #	MOUNTING OPTION	CLIP CLOSURE	EMT SIZE	MC/AC SIZE	FMC SIZE	A	B	C	D	BOX QTY.
6MATATZ	TOP	SNAP CLOSE	---	14-2 – 12-3	3/8"	3.75"	.984"	.63"	1.12"	100
812MATATZ	TOP	SNAP CLOSE	1/2" & 3/4"	---	---	4.19"	.984"	.63"	1.12"	100

No load rating, this item is for component positioning only. Additional support required per NEC 300.11

CONDUIT TO T-GRID PUSH-IN CLIPS



8PATSTZ

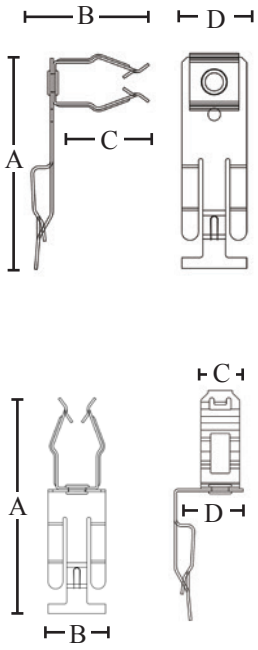

360°

FEATURES

- Easy no-tool installation
- 360˚ rotating clip
- Top and side mounting available
- Attaches conduit or MC/AC cable to T-Grid

APPLICATION

- Push-in conduit hangers with T-Grid clip snap on the top edge of acoustical ceiling T-bar grid and provide a means of support for EMT conduit above the ceiling tiles

MATERIAL/FINISH

- Spring Steel/GEOSEAL™




PART #	MOUNTING OPTION	EMT SIZE	A	B	C	D	BOX QTY.
8PATSTZ*	SIDE	1/2"	3.20"	1.74"	1.46"	.984"	100

No load rating, this item is for component positioning only. Additional support required per NEC 300.11

HEAVY DUTY T-GRID BOX HANGER



512HDTZ



c UL us LISTED


PART #	STATIC LOAD (LBS.)	A	BOX QTY.
512HDTZ	50	24"	25

FEATURES
- No tools required
- Mounts box flush with face of tile
- Mounts 1-1/2" deep box (break off tabs) or 2-1/8" deep box
- Includes mounting clip
- Easily attach drop wire for independent support directly to clip or bar
- Screws into T-Bar for added stability

APPLICATION
- Allows one or multiple electrical boxes to be quickly installed to T-Grid system
- Not for use with paddle fans

MATERIAL/FINISH
- Bar: Steel/Galvanized
- Clip: Spring Steel/GEOSEAL™


CERTIFICATIONS
- UL Standard: UL514A

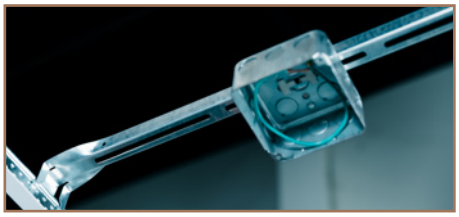

24" T-GRID BRACKET



BHT1

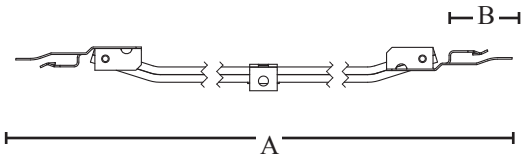

UL LISTED

PART #	STATIC LOAD (LBS.)	A	B	BOX QTY.
BHT1	20 LBS. MAX (STATIC)	28.7"	1"	50

FEATURES
- Easy snap-on design

APPLICATION
- Use with boxes 1-1/2" or 2-1/8" Deep


MATERIAL/FINISH
- Galvanized Steel
- Spring Steel

CERTIFICATIONS
- UL Listed

SNAP-ON T-GRID BOX HANGER



512TZ BHT1A




c UL us LISTED UL LISTED

FEATURES
- Snap-on design
- Mounts 1-1/2" or 2-1/8" boxes to T-grids
- Box mounting clip and screw included (see Southwire part BHTC for replacement clip and screw)
- Boxes not included
- Galvanized steel

APPLICATION
- T-Grid brackets are used to mount boxes on ceiling T-bar grid. Fixed length box bar hangers are available for 1-1/2" or 2-1/8" deep boxes

MATERIAL/FINISH
- Bar: Steel/Galvanized
- Clip: Spring Steel/GEOSEAL™

CERTIFICATIONS
- cULus or UL Listed

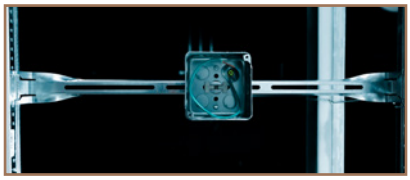


PART #	(A) LENGTH	HEIGHT ADJUSTMENT	STATIC LOAD (LBS.)	BOX QTY.
512TZ*	24"	NONE	13	25
BHT1A**		1/8" TO 8" ABOVE GRID	13	50
BHT481A**	48"	1/8" TO 8" ABOVE GRID	13	25

*cULus Listed | **UL listed
Do not exceed static load without independent wire support to box mounting strap

25" LONG RECESS DOWNLIGHT BRACKET



BH3

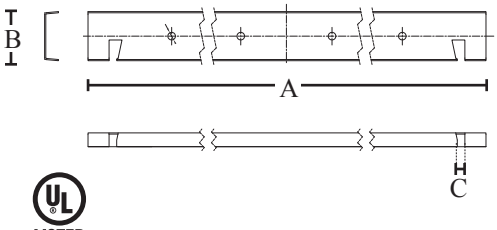


UL LISTED

FEATURES
- 25 1/4" straight bracket mounts architectural recess lights,

APPLICATION
- Has notches 24" apart for use on a T-Bar

MATERIAL/FINISH
- Galvanized steel

CERTIFICATIONS
- UL Listed



PART #	A	B	C	BOX QTY.
BH3	25.5"	1.61"	.25"	25 PAIRS

BHT SERIES BAR HANGERS

CLIP AND SCREW SET



BHTC

FEATURES
- Includes clip and screw


APPLICATION
- Use to affix boxes to Southwire BHT series box support bars

MATERIAL/FINISH
- Steel/Galvanized

PART #	DESCRIPTION	BOX QTY.
BHTC	CLIP AND SCREW, USE WITH BHT1 & BHT1A	50

BH SERIES BAR HANGERS

REPLACEMENT CLIP AND SCREW SET



BHC

FEATURES
- Includes clip and screw


APPLICATION
- Use to affix boxes to Southwire BH series bar hangers.


MATERIAL/FINISH
- Steel/Galvanized

PART #	DESCRIPTION	BOX QTY.
BHC	CLIP AND SCREW	50

BOX SUPPORTS

CEILING



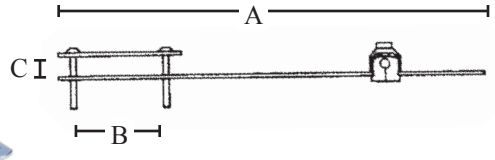

CBS

FEATURES
- Robust fabrication ensures continued performance and longevity


APPLICATION
- For installations where space and access may be limited

MATERIAL/FINISH
- Steel

PART #	SIZE	SHIP CASE	WEIGHT/ CASE (LBS.)	A	OPENINGS		
					B MIN	B MAX	C MAX
CBS	1" – 2"	50	16	11"	1"	2.25"	1.25"

T-GRID CEILING 4" SQUARE BOX SLIDER SUPPORT BRACKET

24" LENGTH

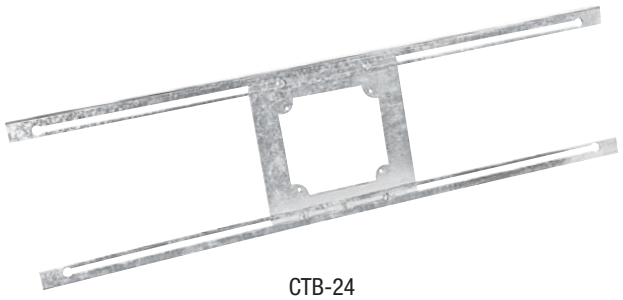

CTB-24

FEATURES

- Brackets rest on back side of ceiling tile and allow box to be installed at any position required
- Mounting plate accommodates all 4" boxes and covers
- "LK" suffix locking bracket design reduces movement due to vibration
- Some assemblies include boxes (see below)

APPLICATION


- Ceiling tile slider brackets are used to mount a variety of electrical and electronic components on ceiling grid tiles

MATERIAL/FINISH

- Steel/Galvanized

PART #	DESCRIPTION	LOCKING TABS	BOX INCLUDED	BOX QTY.
CTB-24	ADJUST 4" BOX ANYWHERE ALONG 24" BRACKET	NO	---	20
CTB-244S	ADJUST 4" BOX ANYWHERE ALONG 24" BRACKET WITH 4" SQUARE BOX	NO	52181-S	20
CTB-24LK	ADJUST 4" BOX ANYWHERE ALONG LOCKING 24" BRACKET	YES	---	20
52181-VTBAR	4" SQUARE, 3-1/2" DEEP BOX, HORIZONTAL & VERTICAL BRACKET ADJUSTMENT	SCREWS	52181-VT	10

T-GRID CEILING, 3" X 2" SWITCH BOX SUPPORT BRACKET



DCB

FEATURES

- Mounts anywhere along grid opening
- Switch box ears mount directly to bracket

APPLICATION


- Bracket is used to secure a 3" x 2" switch box to T-Grid ceiling
- Perfect for mounting small life safety appliances, security cameras or standard outlets

MATERIAL/FINISH


- Steel/Galvanized

PART #	DESCRIPTION	BOX QTY.
DCB	SECURES 3" X 2" WITH EARS TO SECURE TO DROP CEILING GRID	25

FIXTURE SUPPORTS

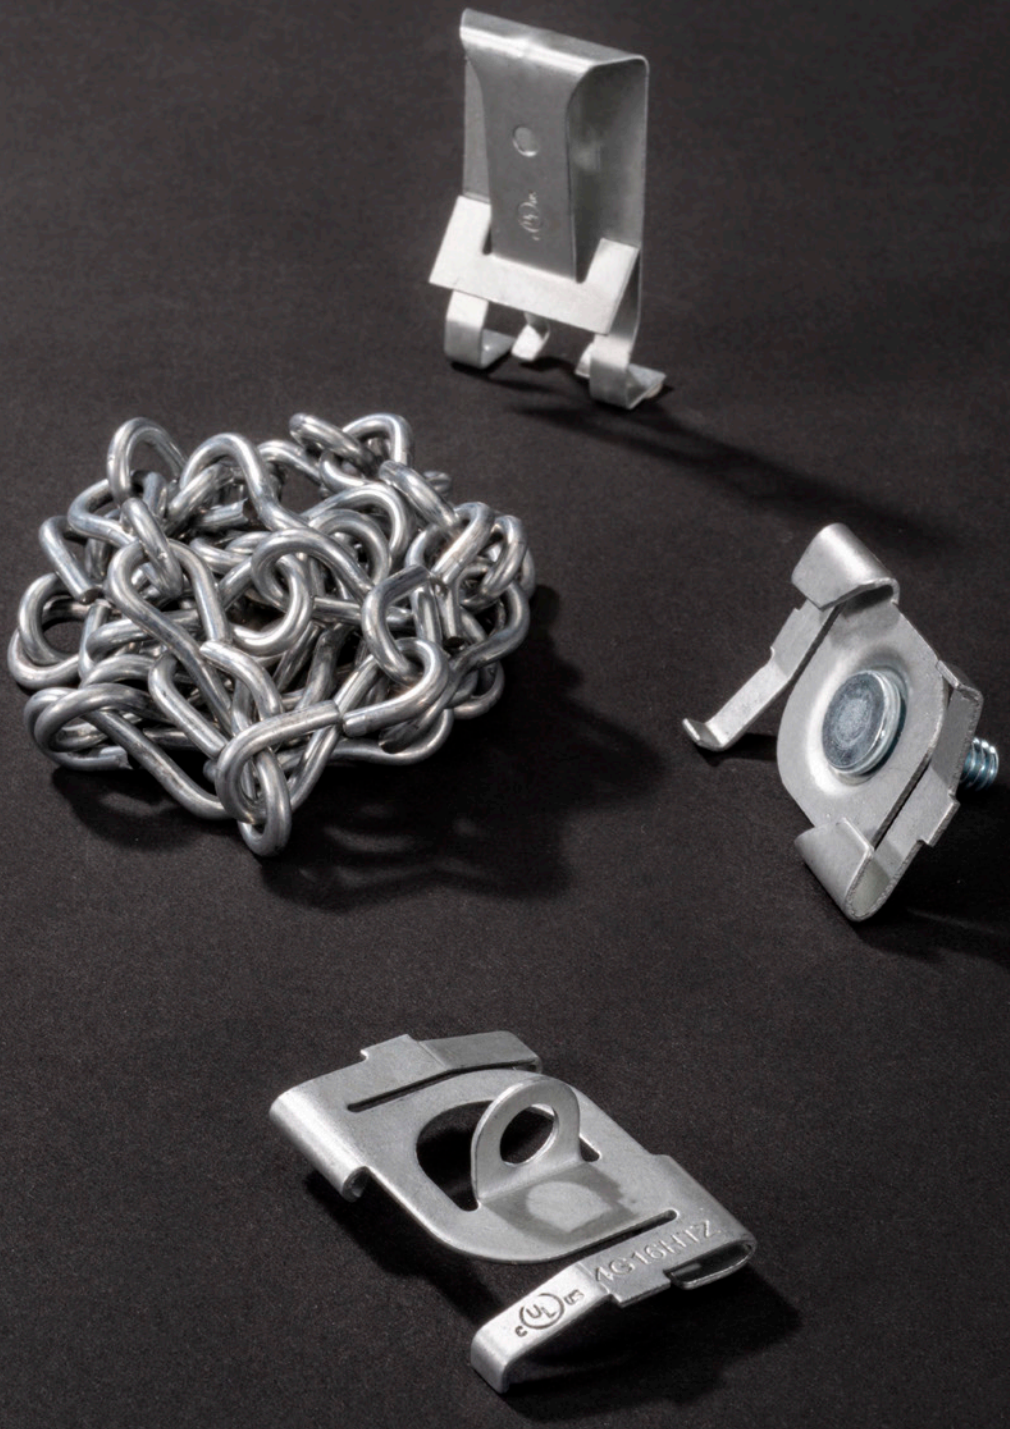


TWIST CLIP

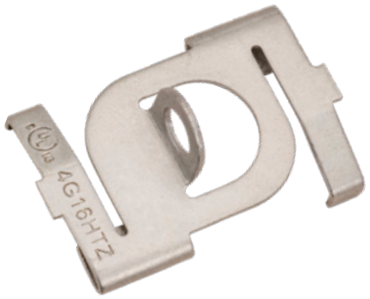

4G16HTZ





c UL us LISTED

FEATURES
- Easy no-tool installation
- Plain hole

APPLICATION
- Twist clips are easily installed with no tools and provide a solution to support wire, hooks, or chains from T-Grids

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239




PART #	T-GRID SIZE	HOLE SIZE	STATIC LOAD (LBS.)	A	B	C	D	BOX QTY.
4G16HTZ	15/16"	1/4" – PLAIN	40	1.094"	.65"	.433"	1.60"	100

TWIST CLIP WITH WING NUT



4G16TZ



c UL us LISTED

FEATURES
- Easy no-tool installation
- Wing Nut included

APPLICATION
- Twist clips with wing nut are designed to support electrical fixtures from T-Grids and are easily installed with no tools

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239




PART #	T-GRID SIZE	SCREW LENGTH	THREAD SIZE	STATIC LOAD (LBS.)	A	B	C	BOX QTY.
4G16TZ	15/16"	9/16"	1/4" – 20	50	1.09"	.256"	.728"	100

LIGHT FIXTURE CLIP



515ATZ



c UL us LISTED

PART #	A	B	C	D	E	BOX QTY.
515ATZ	1.81"	.291"	.371"	1.34"	.984"	100

FEATURES
- Easy no-tool installation


APPLICATION
- The Light Fixture Clip provides a method for securing troffers, lay-in fixtures along with air diffusers

MATERIAL/FINISH
- Spring Steel/GEOSEAL™


CERTIFICATIONS
- UL Standard: UL 2239



FIXTURE TO T-GRID CLIP

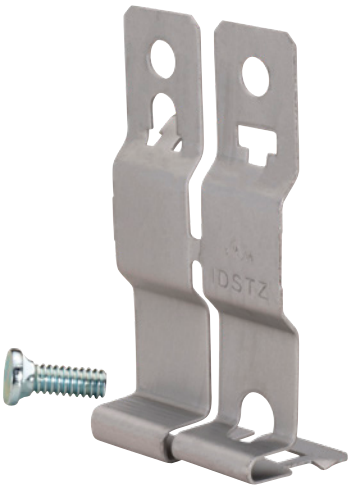

IDSTZ



c UL us LISTED

PART #	T-GRID SIZE	STATIC LOAD (LBS.)	A	B	C	BOX QTY.
IDSTZ	15/16"	65	3.10"	.979"	.748"	100

FEATURES
- Easy no-tool installation
- Includes mounting hardware

APPLICATION
- Clips easily to T-Grid with no tools to support fixtures

MATERIAL/FINISH
- Spring Steel/GEOSEAL™

CERTIFICATIONS
- UL Standard: UL 2239



JACK CHAINS



770TZ

FEATURES
- 12 Gauge Steel 770TZ & W-13
- 10 Gauge Steel W-10

APPLICATION
- Support chain for hanging linear and high bay fixtures

MATERIAL/FINISH
- Steel/Zinc plated

PART #	STATIC WORKING LOAD (LBS.)	PACK SIZE	INNER QTY.	MASTER QTY.
W-10	43	100 FT. BOX	100	500
770TZ	29	100 FT. BOX	100	400
W-13	29	50 FT. BOX	50	500
298S	29	100 FT. ROLL	100	400

S-HOOKS



W-11

APPLICATION
- Use to attach accessories to Jack Chain

MATERIAL/FINISH
- Steel/Zinc plated

PART #	SIZE	STATIC LOAD (LBS.)	INNER QTY.	MASTER QTY.
300	1"	16	100	1000
300A	1-1/4"	29	100	1000
300B	1-1/2"	43	100	1000
W-11	3"	50	100	1000

GROUNDING AND WIRE ACCESSORIES

Southwire offers a comprehensive selection of electrical supplies for all grounding and wire accessory applications.

Ground Clamps
Lay-In Lugs and Mechanical Lugs
Compression Lugs
Bonding Kits and Bonding Bridges
Ground Rod Clamps
Grounding Hubs
Split Bolt Connectors
Pigtails, Screws, and Tapes




GROUND CLAMPS FOR ARMORED WIRE

STANDARD - BRONZE



630B



c UL us LISTED

FEATURES
- Fits #8, 6, or 4 bare armored ground wire copper
- Integral clamp securely holds armor

APPLICATIONS
- Use to connect bare or armored copper wire to galvanized steel water pipe or copper tubing

STANDARD MATERIAL
- Bronze
- Screws - Zinc plated steel


CERTIFICATIONS
- cULus

PART #	SIZE	WIRE RANGE	COPPER ROD RANGE	HARDWARE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A
630B	1/2" – 1"	#8 – #4	1/2" – 1"	ZINC PLATED STEEL	10	100	20	2.30"
630	1-1/4" – 2"	#8 – #4	---	ZINC PLATED STEEL	5	50	30	3.60"
GCA250400	2½"–4"	#8 – #4	---	ZINC PLATED STEEL	---	5	6.25	2.36"
GCA450600	4½"–6"	#8 – #4	---	ZINC PLATED STEEL	---	5	9.40	2.38"

FOR DIRECT BURIAL - BRONZE



630DB



c UL us LISTED

FEATURES
- Fits #8, 6, or 4 bare armored ground wire copper
- Integral clamp securely holds armor

APPLICATIONS
- Use to connect bare or armored copper wire to galvanized steel water pipe or copper tubing

STANDARD MATERIAL
- Bronze
- Screws - Bronze/stainless steel

CERTIFICATIONS
- cULus

PART #	SIZE	WIRE RANGE	COPPER ROD RANGE	HARDWARE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A
630DB	1/2" – 1"	#8 – #4	1/2" – 1"	BRONZE/STAINLESS STEEL	10	100	20	2.30"

COMBINATION GROUND CLAMPS FOR BARE WIRE

LAY-IN LUG STYLE - BRONZE



625TZ



626TZ



627TZ



628



629











FEATURES

- 625TZ, 626TZ and 629 - Fits 8 STR to 4/0 STR AWG copper
- 627TZ and 628 - Fits 10 SOL to 2 STR AWG copper
- Lay-in style lug for fast and easy installa tion of ground wires
- Excellent corrosion protection and ground path continuity

APPLICATIONS

- Use to ground bare copper wire to water pipes or rebar
- Approved for direct burial in earth and concrete
- 3/8 to 1" rebar 1/2" to 1" water pipe, copperwater pipe and ground rod

STANDARD MATERIAL


- Bronze

PART #	SIZE	WIRE RANGE	REBAR RANGE	HARDWARE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A
625TZ2	1/2" – 1"	#8 – 4/0	3/8" – 1"	STAINLESS STEEL	10	100	30	2.36"
626TZ	1/2" – 1"	#8 – 4/0	3/8" – 1"	STAINLESS STEEL	10	100	30	2.28"
627TZ	1/2" – 1"	#10 – #2	3/8" – 1"	STAINLESS STEEL	10	100	23	2.28"
628	1/2" – 1"	#10 – #2	3/8" – 1"	BRASS	10	100	23	2.28"
629	1/2" – 1"	#8 – 4/0	3/8" – 1"	STAINLESS STEEL	10	100	21	2.28"

GROUND CLAMPS FOR BARE WIRE

FOR DIRECT BURIAL - BRONZE


620DB



c UL us
LISTED

FEATURES

- Fits #10, 8, 6, 4 and 2 STR AWG copper
- Excellent corrosion protection and ground path continuity
- Rotational movement of clamps permit fast removal when required

APPLICATIONS

- Use as a direct burial water pipe ground clamp

STANDARD MATERIAL

- Bronze
- Screws - Bronze/stainless steel

CERTIFICATIONS

- cULus


PART #	SIZE	WIRE RANGE	REBAR RANGE	HARDWARE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A
620DB	1/2" – 1"	#10 – #2	1/2" – 1"	BRONZE/STAINLESS STEEL	10	100	20	2.28"

GROUND CLAMPS FOR BARE WIRE

STANDARD - BRONZE



626A



c UL us LISTED

FEATURES
- Fits #10, 8, 6, 4 and 2 STR AWG copper
- Excellent corrosion protection and ground path continuity
- Rotational movement of clamps permit fast removal when required

APPLICATIONS
- Use to ground bare copper wire to galvanized steel water pipes or copper tubing

STANDARD MATERIAL
- Bronze


CERTIFICATIONS
- cULus

PART #	SIZE	WIRE RANGE	REBAR RANGE	HARDWARE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A
626A	1/2" – 1"	#10 – #2	5/8" – 3/4"	ZINC PLATED STEEL	10	100	19	2.43
626BS	1/2" – 1"	#10 – #2	5/8" – 3/4"	BRASS	10	100	20	2.43"
L-160-B	1/2" – 1"	#10 – #2	---	BRONZE	25	125	22	2.43"
626B	1-1/4" – 2"	#10 – #2	---	ZINC PLATED STEEL	5	50	19	3.6"
626C	2-1/2" – 4"	#10 – #2	---	ZINC PLATED STEEL	---	10	10	6.35"
626D	4" – 6"	#10 – #2	---	ZINC PLATED STEEL	---	10	10	8.50"


ZINC DIE CAST



620Z



620BP



c UL us LISTED

FEATURES
- Fits #10, 8, 6, 4 and 2 STR AWG copper
- Rotational movement of clamps permit fast removal when required

APPLICATIONS
- Use to ground bare copper wire to galvanized steel water pipes or copper tubing
- Zinc construction for use with copper and aluminum
- 3/8 – 1" rebar 1/2" – 1" water pipe, copperwater pipe and ground rod

STANDARD MATERIAL
- Zinc die cast

CERTIFICATIONS
- cULus

PART #	SIZE	WIRE RANGE	REBAR RANGE	HARDWARE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A
620Z*	1/2" – 1"	#10 – #2	#8 – #2	ZINC PLATED STEEL	25	250	43	2.22"
620BP**	1/2" – 1"	#10 – #2	#8 – #2	ZINC PLATED STEEL	25	250	43	2.22"


* For copper and aluminum wire
** Non UL

GROUND CLAMPS FOR RIGID CONDUIT

WITH CONDUIT HUBS



621TZ



FEATURES

- Assembled with threaded hub for use on Rigid conduit pipe
- Corrosion resistant bronze construction

APPLICATIONS

- Use to ground copper or aluminum wires to water pipes, ground rods, rebar or other structural members, ensuring a positive grounding connection to earth

STANDARD MATERIAL

- Bronze
- Screws - Zinc plated

PART #	SIZE	WIRE RANGE	CONDUIT SIZE	HARDWARE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A
621TZ	1/2" – 1"	#8 – #4	1/2"	ZINC PLATED	10	100	26	2.25"
622	1-1/4" – 2"	#8 – #4	1/2"	ZINC PLATED	---	50	35	3.60"
623	2-1/2" – 4"	#8 – #4	1/2"	ZINC PLATED	---	10	15	6.34"
624	5" – 6"	#8 – #4	1/2"	ZINC PLATED	---	10	20	8.50"
621A	1/2" – 1"	#8 – #4	3/4"	ZINC PLATED	5	50	20	2.25"
622A	1-1/4" – 2"	#8 – #4	3/4"	ZINC PLATED	5	50	37	3.60"
623A	2-1/2" – 4"	#8 – #4	3/4"	ZINC PLATED	---	10	12	6.34"
624A	5" – 6"	#8 – #4	3/4"	ZINC PLATED	---	10	21	8.50"
621B	1/2" – 1"	#8 – #4	1"	ZINC PLATED	---	10	9	2.25"
622B	1-1/4" – 2"	#8 – #4	1"	ZINC PLATED	---	10	10	3.60"
623B	2-1/2" – 4"	#8 – #4	1"	ZINC PLATED	---	10	21	6.34"
624B	5" – 6"	#8 – #4	1"	ZINC PLATED	---	10	28	8.50"


GROUND ROD CLAMPS

FOR DIRECT BURIAL - BRONZE



412

c UL us LISTED



FEATURES

- Approved for direct burial in ground and concrete
- Corrosion resistant bronze construction

APPLICATIONS

- Securely connects a grounding conductor to a drive

STANDARD MATERIAL

- Bronze with stainless steel screw


CERTIFICATIONS

- cULus

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	WIRE SIZE MIN. MAX.
411	1/2"	100	500	9	1.22"	.75"	10 SOL 2 STR
412	5/8"	100	500	18	1.41"	.90"	10 SOL 2 STR
413	3/4"	---	50	12	1.47"	1"	10 SOL 2 STR

GROUND ROD

NON UL LISTED



FEATURES

- Electrolytic copper coating
- Copper coating will not crack when bent or tear when driven

APPLICATIONS


- Use to connect electrical systems to the ground to safely dissipate electricity to the earth, preventing shorts to connected equipment

STANDARD MATERIAL


- • Copper bonded steel

PART #	ROD DIAMETER	ROD LENGTH	MASTER QTY.	WEIGHT/ CASE (LBS.)
GR8C	5/8"	8 FT	10 RODS	60

GROUNDING HUBS



31



FEATURES

- Corrosion resistant bronze construction assures proper ground continuity

APPLICATIONS


- Use with grounding pipe clamps to connect Rigid conduit to water pipes for grounding

STANDARD MATERIAL

- Bronze

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
31	1/2"	25	3	1.15"	1.07"
32	3/4"	25	5	1.30"	1.28"
33	1"	25	6	1.56"	1.50"
H50	1/2"	25	3	1.15"	1.07"
H75	3/4"	25	5	1.30"	1.28"
H100	1"	20	6	1.56"	1.50"
H125	1-1/4"	20	6	1.88"	1.75"

WATER HEATER BONDING KIT



65183240

c UL us LISTED

PART #	WIRE GAUGE SIZE	HUB TRADE SIZE	MASTER QTY.
65183240	#10 SOL/STR – #2 STR	1/2" – 1"	5

FEATURES
- Kit includes two brass ground clamps and a copper conductor

APPLICATIONS
- The Southwire water heater grounding kit is designed for residential water heater use, but can be used across any continuity break in residential plumbing. This bonding is essential to maintain continuous ground path

CERTIFICATIONS
- cULus

ROUND CLAMPS WITH STRAP & HUB



65177740

c UL us LISTED

PART #	WIRE GAUGE RANGE	PIPE TRADE SIZE	HUB TRADE SIZE	MASTER QTY.
65177740	#12 SOL – #2 STR	1/2" – 1"	1/2"	10
GCH5010050 *	#12 SOL – #2 STR	1/2" – 1"	1/2"	10
GCH5010075 *	#12 SOL – #2 STR	1/2" – 1"	3/4"	10
GCH5010100 *	#12 SOL – #2 STR	1/2" – 1"	1"	10

*Chicago approved

FEATURES
- Includes bronze casting and copper strap with steel screws

APPLICATIONS
- Southwire ground clamps with strap & hub provides a connection for a ground conductor in rigid conduit to water pipe

CERTIFICATIONS
- cULus

PARALLEL GROOVE CLAMP

FOR DIRECT BURIAL - BRONZE



65176140

PART #	WIRE GAUGE RANGE	MASTER QTY.	WEIGHT/ CASE (LBS.)
65176140	#6 – #1/0	5	1.5
65176240	#2 – #4/0	5	2.7

FEATURES
- Serrated grooves provide increased conductor contact and improve mechanical performance
- Dual rated for use on aluminum, ACSR and copper conductors

APPLICATIONS
- The Southwire parallel groove connectors are used for splicing and tapping conductors

STANDARD MATERIAL
- Aluminum

SPLIT BOLT CONNECTORS

SOLDERLESS - FOR COPPER & COPPERWELD WIRE - COPPER ALLOY



690

FEATURES

- Features copper pressure bar and hex style head
- Highly resistant to corrosion and cracking
- Provides high contact pressure between conductors
- UL 467 suitable for direct burial

APPLICATIONS

- For copper to copper connections including copperweld wire

STANDARD MATERIAL

- Copper alloy

PART #	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	MAXIMUM RUN TO MINIMUM TAP RUN	TAP
690	#10	100	1000	2	16 STR	10 STR
691TZ	#8	100	1000	3	8 STR 8 SOL	16 STR 16 SOL
692TZ	#6	100	1000	5	6 SOL	16 SOL
693	#6	50	500	8	6 STR 6 SOL	14 STR 14 SOL
694	#4	50	500	8	4 STR 4 SOL	14 STR 14 SOL
695	#2	50	500	11	2 STR 2 SOL	14 STR 14 SOL
696	1/0	50	500	8	1/0 STR 1/0 SOL	14 STR 14 SOL
697	2/0	25	250	7	2/0 STR 2/0 SOL	14 STR 14 SOL
698TZ	3/0	25	25	8	3/0 STR 3/0 SOL	8 STR 8 SOL
699TZ	4/0 – 250 MCM	5	50	10	250 STR	8 STR
700TZ	350 MCM	---	6	5	350 STR	1/0 STR
701TZ	500 MCM	---	6	5	500 STR	2/0 STR
703TZ	1000 MCM	---	4	10	500 MCM	1000 MCM

SPLIT BOLT CONNECTORS
WITH SPACER BAR



792

FEATURES
- Electro tin-plated, high strength copper alloy with spacer
- Spacer separates dissimilar conductors and provides long contact length that prevents high pressure point contacts between run and tap conductors

APPLICATIONS
- For copper to copper, copper to aluminum, aluminum to aluminum
- Usable with aluminum connector, however not UL listed for that application

STANDARD MATERIAL
- Copper alloy

STANDARD FINISH
- Electro-tin plated

PART #	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	MAXIMUM RUN TO MINIMUM TAP RUN	TAP
FOR COPPER TO COPPER, COPPER TO ALUMINUM, ALUMINUM TO ALUMINUM (2)						
792	#6	100	1000	7	6 STR 6 SOL	10 STR 10 SOL
794	#3	---	100	11	4 STR 4 SOL	10 STR 10 SOL
795	#2	---	50	15	2 STR 2 SOL	14 STR 14 SOL
FOR COPPER TO COPPER (1,2)						
796	1/0	---	25	10	1/0 STR 1/0 SOL	10 STR 10 SOL
797	2/0	---	25	5	2/0 STR 2/0 SOL	8 STR 8 SOL
799	4/0 – 250 MCM	5	50	15	250 STR	8 STR
801TZ	500 MCM	---	6	7	500 STR	2/0 STR
803TZ	1000 MCM	---	2	6	350 MCM	1000 MCM

(1) Usable with aluminum conductor, however not UL listed for that application
(2) When making connections with aluminum or ACSR (Aluminum conductor steel reinforced) make certain to use an oxide inhibiting compound such as antiox featured on page 14-23

MEIBB™ BONDING BRIDGE



MEIBB

c UL us LISTED

PART #	WIRE GAUGE SIZE	TERMINATING POINTS	MATERIAL	INNER QTY.	MASTER QTY.
MEIBB*	#4 SOL – #10 SOL	6	ZINC DIE-CAST	1	6

*Southwire Exclusive

FEATURES

- Conventional Intersytem Bonding Bridge includes mounting holes and weather-resistant PVC cover
- MEIBB™ Bonding Bridge mounts to enclosures, conduit bodies and inline with conduit (1/2" Trade Size) It is also gang able allowing for multiple bridge runs to be made and includes an inspection window to give you a quick view of your connection points

APPLICATIONS

- Southwire intersystem bonding bridges are used to bond all telephone, cable and satellite grounding conductors at a single location. Traditonal PVC covered "mount-to-house" styles and Southwire's innovative MEIBB™ Bonding Bridge

CERTIFICATIONS

- cULus

BONDING BRIDGE

ZINC DIE CAST OR BRONZE



813



813-B

FEATURES

- Meets 2008 NEC article 250.94
- Stainless steel hardware
- Lay-in style lug for easy installations
- Mounts directly to grounding electrode conductor
- Robust one-piece extruded aluminum construction
- Zinc is tin plated for maximum conductivity
- Includes weather resistant polycarbonate snap on cover
- Available in zinc and bronze

APPLICATIONS

- Used to bond all utility conductors to a single location in residential and small commercial facilities as required by Article 250.94 of the 2008 NEC guide

CONDUCTIVE RANGE

- 6-2 AWG grounding electrode conductor
- 14-4 AWG bonding conductors

STANDARD MATERIAL

- Zinc die cast - 813
- Bronze - 813B
- Polycarbonate cover
- 65181740 PVC Cover

PART #	MATERIAL	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	CONDUCTOR RANGE
813	ZINC	1	10	5	6-2 AWG GROUNDING ELECTRODE CONDUCTOR 14-4 AWG BONDING CONDUCTORS
813B	BRONZE	1	10	6	6-2 AWG GROUNDING ELECTRODE CONDUCTOR 14-4 AWG BONDING CONDUCTORS

MULTITAP CONNECTORS



65254740

FEATURES
- Dual-rated for use with Al and Cu conductors
- Oxide Inhibitor Pre-installed

APPLICATIONS
- Southwire multitap line of connectors makes inspectable, UL 486B listed and CSA certified, clear multitap is dual rated AL9CU for stranded copper or aluminum applications

STANDARD MATERIAL
- Aluminum with Plastisol Insulation


PART #	WIRE GAUGE SIZE	HEX DRIVER SIZE	INNER QTY.	MASTER QTY.
65254740	2/0 STR – #6 STR	3/16"	1	5

SOLDERLESS LUGS

SINGLE HOLE - OFFSET TANG - COPPER



820TZ



FEATURES
- Unique pressure bar provides solid grip between conductor and terminal
- Hole for offset tang mounting


APPLICATIONS
- Terminates an electrical conductor to facilitate mechanical connection

STANDARD MATERIAL
- Copper
- Steel screw


PART #	AMP RATING	RECOMMENDED TORQUE IN LBS.	BOLT SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	WIRE RANGE MIN. – MAX.	A	B	C	D
820TZ	25	20	1/8"	250	3	#14 – #10	1"	.3125"	.6875"	.125"
821	35-50	45	3/16"	250	6	#14 – #6	1.1875"	.375"	.75"	.1875"
822	70	50	1/4"	200	6	#2 – #8	1.3125"	.50"	.8125"	.25"
823	70-90	50	1/4"	200	9	#2 – #6	1.5313"	.50"	1"	.25"
824	125	50	1/4"	100	11	#8 – 1/0	1.9688"	.625"	1.375"	.25"
825TZ	175	124	3/8"	25	3	#4 – 3/0	2.1875"	.75"	1.5625"	.375"
826TZ	225	204	5/16"	25	6	#6 – 4/0	2.625"	1"	2"	.3125"
827TZ	300	325	3/8"	20	10	1/0 – 350 MCM	3.1875"	1"	2.625"	.375"
828	400	375	3/8"	10	7	4/0 – 500 MCM	4.25"	1.50"	2.75"	.375"
829	650	500	1/2"	4	7	600 MCM – 100 MCM	4.625"	2"	3.6875"	.50"

LAY-IN LUGS

DUAL RATED - ALUMINUM



810TZ



c UL us LISTED

FEATURES

- 90°C temperature rating
- Single hole assembly
- Provides positive grounding points in load centers or other enclosures

APPLICATIONS

- For use with copper or aluminum conductor
- Terminates an electrical conductor to facilitate mechanical connection

STANDARD MATERIAL

- Aluminum
- Steel screw


CERTIFICATIONS

- cULus


PART #	RECOMMENDED TORQUE IN LBS.	BOLT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	WIRE RANGE MIN. – MAX.	A	B	C	D
810TZ	35	1/4"	25	250	6	#14 – #4	1.13"	.39"	.79"	.22"
811TZ	50	3/8"	---	100	7	#14 – 1/0	1.65"	.63"	1.10"	.26"
812TZ	275	9/16"	---	50	10	6 – 250 MCM	2.19"	.89"	1.72"	.33"

LAY-IN LUGS

COPPER



1/0-8CL



FEATURES

- 90°C temperature rating
- Single hole assembly
- Provides positive grounding points in load centers or other enclosures

APPLICATIONS

- For use with copper conductor
- Terminates an electrical conductor to facilitate mechanical connection

STANDARD MATERIAL

- Copper
- Steel screw


PART #	WIRE GAUGE RANGE	MASTER QTY.	A	B	C
65175540	#4-#14	10	1"	3/8"	13/16"
1/0-14CL	#14 - 1/0	100	1-1/2"	5/8"	1-1/8"
3/0-6CL	#6 – 3/0	50	2"	13/16"	1-1/2"

SOLAR LAY-IN LUGS

DUAL RATED



810DB



c UL us LISTED

FEATURES

- Specifically designed for solar panels
- Manufactured from high strength pure electrolytic copper for superior conductivity
- Open face design allows for fast lay-in of the conductor, eliminating the need for cutting or breaking
- Suitable for direct burial/outdoor use
- Excellent corrosion resistance

APPLICATIONS

- UL 467 listed for direct burial in earth or concrete
- Corrosion resistant
- 4 AWG STR thorugh 14 AWG STR/SOL
- Commonly used for solar panel grounding

STANDARD MATERIAL

- Body - Copper
- Hardware - Stainless steel screw

STANDARD FINISH

- Tin plated

CERTIFICATIONS

- cULus

PART #	BOLT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	WIRE RANGE MIN. – MAX.	A	B	C	D
810DB	1/4" – 20	100	1000	47	#14 – #4	1.125"	.375"	.875"	.1875"


MECHANICAL LUGS

SINGLE - ALUMINUM



805TZ

c UL us LISTED



FEATURES

- 90°C temperature rating
- Single hole assembly
- Up to 600 lbs. torque
- High strength aluminum alloy provides low contact resistance

APPLICATIONS

- For use with copper conductor
- Terminates an electrical conductor to facilitate mechanical connection

STANDARD MATERIAL

- Aluminum
- Steel screw

CERTIFICATIONS

- cULus

PART #	RECOMMENDED TORQUE IN LBS.	BOLT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	WIRE RANGE MIN. – MAX.	A	B	C	D
805TZ	35	1/4"	100	1000	14	#14 – #6	1.0625"	.50"	.50"	.25"
806TZ	50	1/4"	100	1000	19	#14 – #2	1.1563"	.50"	.5625"	.25"
807TZ	180	1/4"	---	50	2	#14-1/0	1.4088"	.625"	.8125"	.25"
808TZ	120	1/4"	---	50	2	#14-2/0	1.4688"	.625"	.8125"	.25"
809TZ*	325	5/16"	---	25	3	#6 – 4/0	2"	1"	1.0625"	.3125"
1810*	325	5/16"	10	100	10	#6 – 300 MCM	2"	1"	1.0625"	.3125"
817*	325	5/16"	---	25	4	#6 – 350 MCM	2.25"	1.125"	1.25"	.3125"
818*	375	5/16"	10	100	24	#4 – 500 MCM	2.75"	1.125"	1.50"	.375"
1818*	500	3/8"	5	50	15	#9 – 600 MCM	2.75"	1.375"	1.50"	.375"
819TZ*	500	3/8"	---	5	2	350 MCM – 800 MCM	3.50"	1.50"	1.75"	.50"


*For copper and aluminum

MECHANICAL LUGS

DOUBLE - DUAL RATED - ALUMINUM



2807TZ



c UL us LISTED

FEATURES

- Two conductor design
- Fast and easy installation
- 90°C temperature rating

APPLICATIONS

- For use with copper or aluminum conductor
- Terminates an electrical conductor to facilitate mechanical connection

STANDARD MATERIAL

- Aluminum
- Steel screw

CERTIFICATIONS

- cULus

PART #	RECOMMENDED TORQUE IN LBS.	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	WIRE RANGE MIN. – MAX.	A	B	C	D
2807TZ	50	10	100	23	#14 – 1/0	1.50"	1.1875"	.8125"	.25"
2808TZ	50	10	100	24	#14 – 2/0	1.50"	1.1875"	.8125"	.25"
2809	275	10	100	26	#6 – 250 MCM	2.5625"	1.625"	1.1875"	.375"
2817TZ	275	4	40	20	#6 – 350 MCM	2.875"	2.9375"	1.25"	.50"
2818	375	6	60	19	#2 – 600 MCM	3.125"	2.375"	1.5625"	.50"
2819	375	6	60	14	300 MCM – 800 MCM	3.50"	2.8125"	1.6875"	.625"

COMPRESSION LUG SPLICES

LONG BARREL

FEATURES

- Seamless, high conductivity copper tubing, suitable for heavy duty applications
- Tin-plated to provide corrosion resistance
- Color coded

APPLICATIONS

- Suitable for use at voltages up to 35 KV provided connector is properly taped
- 5 KV is the maximum voltage in all bare splice applications

STANDARD MATERIAL


- Copper

STANDARD FINISH

- Tin plated



3101TZ




PART #	WIRE SIZE	COLOR CODE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
3101TZ	#8	RED	100	1000	22	1.75"	.20"
3102	#6	BLUE	100	1000	22	1.75"	.20"
3103	#4	GRAY	100	1000	26	1.75"	.25"
3105TZ	#2	BROWN	50	500	21	1.90"	.31"
3106	1/0	PINK	25	250	19	2.20"	.39"
3107	2/0	BLACK	25	250	20	2.25"	.44"
3108	3/0	ORANGE	25	250	23	2.25"	.49"
3109	4/0	PURPLE	25	250	32	2.75"	.55"
3109A	250 MCM	YELLOW	10	100	20	3.25"	.59"
3109B	300 MCM	WHITE	10	100	23	3.50"	.66"
3110TZ	350 MCM	RED	10	100	28	3.75"	.70"
3110A	400 MCM	BLUE	10	100	32	3.75"	.76"
3111TZ	500 MCM	BROWN	5	50	25	4.25"	.83"
3111A	600 MCM	GREEN	5	50	34	4.50"	.93"
3112	750 MCM	BLACK	5	50	41	4.75"	1.03"

SHORT BARREL



3301




PART #	WIRE SIZE	COLOR CODE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
3301	#8	RED	100	1000	12	.90"	.17"
3302	#6	BLUE	100	1000	14	1"	.20"
3303	#4	GRAY	100	1000	16	1"	.25"
3305	#2	BROWN	100	1000	27	1.25"	.31"
3305A	#1	GREEN	50	500	23	1.60"	.39"
3306	1/0	PINK	50	500	26	1.75"	.44"
3307	2/0	BLACK	50	500	29	1.75"	.49"
3308	3/0	ORANGE	50	500	34	1.90"	.55"
3309	4/0	PURPLE	25	250	23	2"	.59"
3309A	250 MCM	YELLOW	25	250	29	2.10"	.66"
3310	350 MCM	RED	20	200	31	2.10"	.70"
3310A	400 MCM	BLUE	10	100	21	2.30"	.76"
3311	500 MCM	BROWN	10	100	29	2.50"	.83"
3311A	600 MCM	GREEN	5	50	20	2.50"	.93"
3312	750 MCM	BLACK	5	50	29	3.21"	1.03"

COMPRESSION LUGS

ONE HOLE - SHORT BARREL



2901



FEATURES

- Ideal for direct burial in earth or concrete and grounding applications
- Produced from high conductivity copper tubing and suitable for heavy duty applications
- Tin-plated to provide corrosion resistance
- Color coded

APPLICATIONS

- Listed for 35 KV maximum when properly installed

STANDARD MATERIAL

- Copper

STANDARD FINISH

- Tin plated


PART #	WIRE SIZE	COLOR CODE	BOLT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
2901	#8	RED	10	100	1000	14	1.20"	.42"
2901A	#8	RED	1/4"	100	1000	13	1.20"	.42"
2902	#6	BLUE	1/4"	100	1000	17	1.50"	.42"
2902A	#6	BLUE	5/16"	100	1000	17	1.50"	.42"
2903	#4	GRAY	1/4"	100	1000	20	1.50"	.71"
2903A	#4	GRAY	5/16"	100	1000	18	1.50"	.71"
2903B	#4	GRAY	3/8"	100	1000	18	1.50"	.71"
2905	#2	BROWN	3/8"	100	1000	28	1.80"	.83"
2905A	#1	GREEN	3/8"	100	1000	35	1.83"	.67"
2906	1/0	PINK	3/8"	50	500	21	1.83"	.74"
2907	2/0	BLACK	3/8"	50	500	32	2.24"	.81"
2907A	2/0	BLACK	1/2"	50	500	29	2.24"	.81"
2908	3/0	ORANGE	3/8"	25	250	21	2.36"	.90"
2909	4/0	PURPLE	1/2"	25	250	24	2.36"	1"
2909A	250 MCM	YELLOW	1/2"	25	250	30	2.48"	1.09"
2909B	300 MCM	WHITE	1/2"	25	250	33	2.49"	1.19"
2910	350 MCM	RED	1/2"	20	200	33	2.61"	1.28"
2910A	400 MCM	BLUE	1/2"	10	100	24	3.95"	1.39"
2911	500 MCM	BROWN	5/8"	10	100	33	3.28"	1.54"
2911A	600 MCM	GREEN	5/8"	5	50	24	3.50"	1.72"
2912	750 MCM	BLACK	5/8"	5	50	35	4.37"	1.90"

COMPRESSION LUGS

TWO HOLE - SHORT BARREL



2921



FEATURES

- Produced from high conductivity copper tubing and suitable for heavy duty applications
- Tin-plated to provide corrosion resistance
- Color coded

APPLICATIONS

- Listed for 35 KV maximum when properly installed
- Ideal for direct burial in earth or concrete and grounding applications

STANDARD MATERIAL

- Copper

STANDARD FINISH

- Tin plated


PART #	WIRE SIZE	COLOR CODE	BOLT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C = HOLE SPACING
2921	#8	RED	10	100	1000	20	2.50"	.45"	.625"
2922	#6	BLUE	1/4"	100	1000	23	2.56"	.45"	.625"
2923	#4	GRAY	1/4"	100	1000	28	2.34"	.50"	.625"
2925	#2	BROWN	5/16"	50	500	26	2.58"	.61"	.75"
2925A	#2	BROWN	3/8"	50	500	26	3.05"	.61"	.75"
2926	1/0	PINK	5/16"	25	250	20	3.14"	.75"	.875"
2927	2/0	BLACK	3/8"	25	250	23	3.24"	.83"	1.75"
2927A	2/0	BLACK	1/2"	25	250	31	4.17"	.83"	1.75"
2928	3/0	ORANGE	1/2"	25	250	36	4.25"	.91"	1.75"
2929	4/0	PURPLE	1/2"	20	200	36	4.28"	1.02"	1.75"
2929A	250 MCM	YELLOW	1/2"	10	100	24	4.41"	1.11"	1.75"
2929B	300 MCM	WHITE	1/2"	10	100	26	4.53"	1.24"	1.75"
2930	350 MCM	RED	1/2"	5	50	17	4.53"	1.24"	1.75"
2931	400 MCM	BLUE	1/2"	5	50	20	4.81"	1.34"	1.75"
2932	500 MCM	BROWN	1/2"	5	50	27	4.88"	1.52"	1.75"
2933	600 MCM	GREEN	3/8"	5	50	35	4.49"	1.73"	1.75"
2934	750 MCM	BLACK	1/2"	5	50	44	4.79"	1.89"	1.75"

COMPRESSION LUGS

ONE HOLE - LONG BARREL



3001



FEATURES

- Produced from high conductivity copper tubing and suitable for heavy duty applications
- Tin-plated to provide corrosion resistance
- Color coded

APPLICATIONS

- Listed for 35 KV maximum when properly installed
- Ideal for direct burial in earth or concrete and grounding applications

STANDARD MATERIAL

- Copper

STANDARD FINISH

- Tin plated


PART #	WIRE SIZE	COLOR CODE	BOLT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
3001	#8	RED	1/4"	100	1000	16	1.70"	.38"
3002	#6	BLUE	1/4"	100	1000	20	1.77"	.38"
3003	#4	GRAY	1/4"	100	1000	23	1.77"	.50"
3005	#2	BROWN	3/8"	50	500	18	2"	.67"
3005A	#1	GREEN	3/8"	50	500	23	2.09"	.67"
3006	1/0	PINK	3/8"	50	500	29	2.20"	.75"
3007	2/0	BLACK	3/8"	25	250	20	2.80"	.75"
3008	3/0	ORANGE	3/8"	25	250	25	2.80"	.87"
3008A	3/0	ORANGE	1/2"	25	250	23	2.80"	.87"
3009	4/0	PURPLE	1/2"	25	250	28	2.80"	1"
3009A	250 MCM	YELLOW	1/2"	20	200	30	3.03"	1.13"
3009B	300 MCM	WHITE	1/2"	10	100	20	3.39"	1.13"
3010TZ	350 MCM	RED	1/2"	10	100	24	3.50"	1.13"
3010A	400 MCM	BLUE	1/2"	10	100	30	3.74"	1.34"
3011TZ	500 MCM	BROWN	1/2"	5	50	23	4.02"	1.50"
3011A	600 MCM	GREEN	5/8"	5	50	29	4.25"	1.75"
3012TZ	750 MCM	BLACK	5/8"	5	50	41	5.16"	1.87"

COMPRESSION LUGS

TWO HOLE - LONG BARREL



3201TZ



FEATURES

- Produced from high conductivity copper tubing and suitable for heavy duty applications
- Tin-plated to provide corrosion resistance
- Color coded

APPLICATIONS

- Listed for 35 KV maximum when properly installed
- Ideal for direct burial in earth or concrete and grounding applications

STANDARD MATERIAL

- Copper

STANDARD FINISH

- Tin plated


PART #	WIRE SIZE	COLOR CODE	BOLT SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C = HOLE SPACING
3201TZ	#8	RED	1/4"	100	1000	23	2.19"	.42"	.625"
3202TZ	#6	BLUE	1/4"	100	1000	26	2.19"	.42"	.625"
3203	#4	GRAY	1/4"	100	1000	31	2.36"	.49"	.625"
3205TZ	#2	BROWN	1/2"	50	500	39	4.25"	.807"	1.75"
3206	1/0	PINK	1/2"	25	250	32	4.40"	.74"	1.75"
3207	2/0	BLACK	3/8"	25	250	34	4.61"	.81"	1.75"
3208	3/0	ORANGE	1/2"	20	200	33	4.69"	.90"	1.75"
3209	4/0	PURPLE	1/2"	10	100	21	4.72"	1"	1.75"
3209A	250 MCM	YELLOW	1/2"	10	100	27	4.95"	1.09"	1.75"
3209B	300 MCM	WHITE	1/2"	10	100	31	5.31"	1.19"	1.75"
3210	350 MCM	RED	1/2"	10	100	37	5.39"	1.28"	1.75"
3210A	400 MCM	BLUE	1/2"	5	50	23	5.47"	1.39"	1.75"
3211	500 MCM	BROWN	1/2"	5	50	32	5.79"	1.72"	1.75"
3211A	600 MCM	GREEN	1/2"	5	50	41	5.79"	1.72"	1.75"
3212	750 MCM	BLACK	1/2"	5	50	56	6.30"	1.90"	1.75"

GREEN PIGTAIL

WITH SLOTTED HEX GROUND SCREW



50



FEATURES

- Plated green to ensure proper identification

APPLICATIONS

- Use to ground receptacles to steel boxes

STANDARD MATERIAL

- Copper wire/zinc plated ground screw

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
50	7" 14GA. SOLID GREEN	100	1000	23	7"	10-32 x 3/8"
49	7-1/2" 12GA. SOLID GREEN	100	1000	24	7-1/2"	10-32 x 3/8"
49L	10" 12GA. SOLID GREEN	100	1000	32	10"	10-32 x 3/8"
49XL	7" 12GA. SOLID GREEN	100	800	28	12"	10-32 x 3/8"
50A	7-1/2" 10GA. SOLID GREEN	100	100	30	7-1/2"	10-32 x 3/8"

GREEN GROUNDING PIGTAILS



PTST14GN



PTST12GN-NGS

FEATURES

- 12 AWG & 14 AWG green grounding pigtails

APPLICATIONS

- Southwire Grounding Pigtails feature THHN lead wires that are convenient for grounding applications in electrical boxes

PART #	WIRE GAUGE	LENGTH	COLOR	ATTACHMENT TYPE	INNER QTY.	MASTER QTY.
PTST14GN	14 AWG STR	8"	GREEN	FLANGED SPADE TERMINAL & CAPTIVE 10-32 GREEN SCREW	---	100
PTST12GN-NGS	12 AWG STR	8"	GREEN	FLANGED SPADE TERMINAL & PRESTRIPPED 5/8"	---	100
PTST12GN	12 AWG STR	8"	GREEN	FLANGED SPADE TERMINAL & CAPTIVE 10-32 GREEN SCREW	---	100
PTS012GN-S	12 AWG SOL	8"	GREEN	STRIPPED 5/8" ON BOTH ENDS	---	100


POWER PIGTAIL LEADS WITH STRIP AND STRIP TERMINAL



PTS012RD



PTS012BU



PTS012BK



PTS012WH

FEATURES

- 8" solid power pigtail leads
  *Both Ends Prestripped 5/8"

APPLICATIONS

- Southwire's Power Pigtails feature THHN lead wires that are convenient for grounding applications in electrical boxes

PART #	WIRE GAUGE SIZE	LENGTH	COLOR	MASTER QTY.
PTS014BK	14 AWG SOL	8"	BLACK	100
PTS012BK	12 AWG SOL	8"	BLACK	100
PTS012RD	12 AWG SOL	8"	RED	100
PTS012WH	12 AWG SOL	8"	WHITE	100

POWER PIGTAIL LEADS WITH FORK TERMINAL



PTST12BK

PART #	WIRE GAUGE	LENGTH	COLOR	MASTER QTY.
PTST14BK	14 AWG STR	8"	BLACK	100
PTST12BK	12 AWG STR	8"	BLACK	100
PTST12RD	12 AWG STR	8"	RED	100
PTST12WH	12 AWG STR	8"	WHITE	100

FEATURES

- 8" stranded power pigtail leads
  *Includes flanged spade terminal and prestripped 5/8"

APPLICATIONS

- Southwire's Grounding Pigtails feature THHN lead wires that are convenient for grounding applications

GROUND SCREWS



GS



GSST

PART #	THREAD SIZE	SCREW LENGTH	MATERIAL	MASTER QTY.
GS	10-32	3/8"	GREEN PASSIVATED	100
GSST *	10-32	3/8"	GREEN PASSIVATED	100

*Self-Tapping, Tri-Drive Hex Washer Head

FEATURES
- The head on the grounding screws is compatible with Hex, Phillips, slotted and #2 Robertson drive styles
- Hole-finding designed screw tip

APPLICATIONS
- Southwire combination grounding screws are used in electrical boxes and on electrical devices for connecting ground conductors

STANDARD MATERIAL
- Steel

GREEN GROUND CLIP

STEEL



GC



PART #	WIRE GAUGE SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
GC	#14 & #12	100	.3	.24"	.65"

FEATURES
- Holds 14 and 12 GA. copper and aluminum wire

APPLICATIONS
- Connects NM cable to outlet box
- Connects grounding jumper from a receptacle to an outlet

STANDARD MATERIAL
- Steel

HEAVY DUTY CABLE LUBRICANT



1200TZ

LISTED

PART #	SIZE	MASTER QTY.	WEIGHT/CASE (LBS.)
1200TZ	1 QUART	12	13
1201TZ	1 GALLON	4	25
1202TZ	1 GALLON PAIL	1	30

FEATURES
- Water based gel
- Non-toxic
- Non-flammable
- Cleans easily off with just water

APPLICATIONS
- Compatible with all cables
- Helps avoid wear and abrasion damage
- UL Listed

ANTIOX CONTACT COMPOUND



1209

FEATURES

- Prevents oxidation of aluminum to aluminum and aluminum to copper electrical conductors
- Non-conductive

APPLICATIONS

- Use for all types of connections, split bolt and wire connectors

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1209	4 OUNCE	12	3
1210	8 OUNCE	12	6

PLASTIC ELECTRICAL TAPE

7 MIL. - PVC



860T

FEATURES

- Premium grade for electrical work
- Can be used in residential maintenance
- 600v rated

APPLICATIONS

- Insulates and protects wires and connectors; protects splices and filler compounds
- Holds high voltage electrical appliances

STANDARD MATERIAL

- PVC

PART #	SIZE	COLOR	UNIT CARTON	MASTER QTY.	WEIGHT/ CASE (LBS.)
860T	3/4" x 60'	BLACK	10	200	37
866T	3/4" x 66'	BLACK	10	100	20
866BLU	3/4" x 66'	BLUE	10	100	20
866BRN	3/4" x 66'	BROWN	10	100	20
866GRN	3/4" x 66'	GREEN	10	100	20
866GRY	3/4" x 66'	GRAY	10	100	20
866ORN	3/4" x 66'	ORANGE	10	100	20
866RED	3/4" x 66'	RED	10	100	20
866WHT	3/4" x 66'	WHITE	10	100	20
866YEL	3/4" x 66'	YELLOW	10	100	20

CAUTION TAPE

NON- DETECTABLE



1591



1593

FEATURES
- Traditional and familiar design
- Strong and durable polyethylene construction

APPLICATIONS
- High visibility tape designed as a hazard alert

STANDARD MATERIAL
- PVC

PART #	SIZE	MIL.	COLOR /TYPE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1591	3" x 300'	4	YELLOW “CAUTION”	16	16
1592	3" x 1000'	2	YELLOW “CAUTION”	8	40
1593	3" x 200'	4	RED “CAUTION BURIED ELECTRIC LINE BELOW”	16	16
1594	3" x 1000'	4	RED “CAUTION BURIED ELECTRIC LINE BELOW”	8	40
1595	6" x 1000'	4	RED “CAUTION BURIED ELECTRIC LINE BELOW”	4	60

DETECTABLE



1596

FEATURES
- Instantly recognizable as a hazard caution
- Strong and durable polyethylene construction
- Can be easily located with a metal detector

APPLICATIONS
- High visibility tape designed as a hazard alert

STANDARD MATERIAL
- Foil bonded PVC

PART #	SIZE	MIL.	COLOR /TYPE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1596	2" x 1000'	5	RED “CAUTION BURIED ELECTRIC LINE BELOW”	12	60
1597	3" x 1000'	5	RED “CAUTION BURIED ELECTRIC LINE BELOW”	8	64
1598	6" x 1000'	5	RED “CAUTION BURIED ELECTRIC LINE BELOW”	4	64

WARNING TAG



65180940

FEATURES
- Corrosion-resistant aluminum construction
- Stamped markings are permanent
- Pre-drilled hole for easy mounting

APPLICATIONS
- Southwire grounding code tags are used to mark electrical service for safety

PART #	MATERIAL	INNER QTY.	MASTER QTY.
65180940	ALUMINUM	---	50

ELECTRICIANS SCREW KIT



65177140

FEATURES
- 120-count screw kits
- Compartmentalized storage case included
- Includes 2/3", 7/8", 1", 1-1/4", 1-5/8", and 2" screws

APPLICATIONS
- Southwire electrician screw kits contain assorted sizes and lengths of commonly used electrical machine screws

STANDARD MATERIAL
- Steel


STANDARD FINISH
- Zinc

PART #	THREAD SIZE	SCREW TYPE	SCREW SIZES	QTY OF SCREWS	MASTER QTY.
65177140	6-32	SLOTTED FLAT HEAD SCREWS	2/3", 7/8", 1", 1-1/4",1-5/8", 2"	20 OF EACH SIZE	5
65177240	8-32	SLOTTED FLAT HEAD SCREWS	2/3", 7/8", 1", 1-1/4",1-5/8", 2"	20 OF EACH SIZE	5

PANEL AND BREAKER ACCESSORIES


Southwire's products keep our customers
safe and secure from electrical shock in breaker panels.

Breaker Locks
Panel Filler Plates

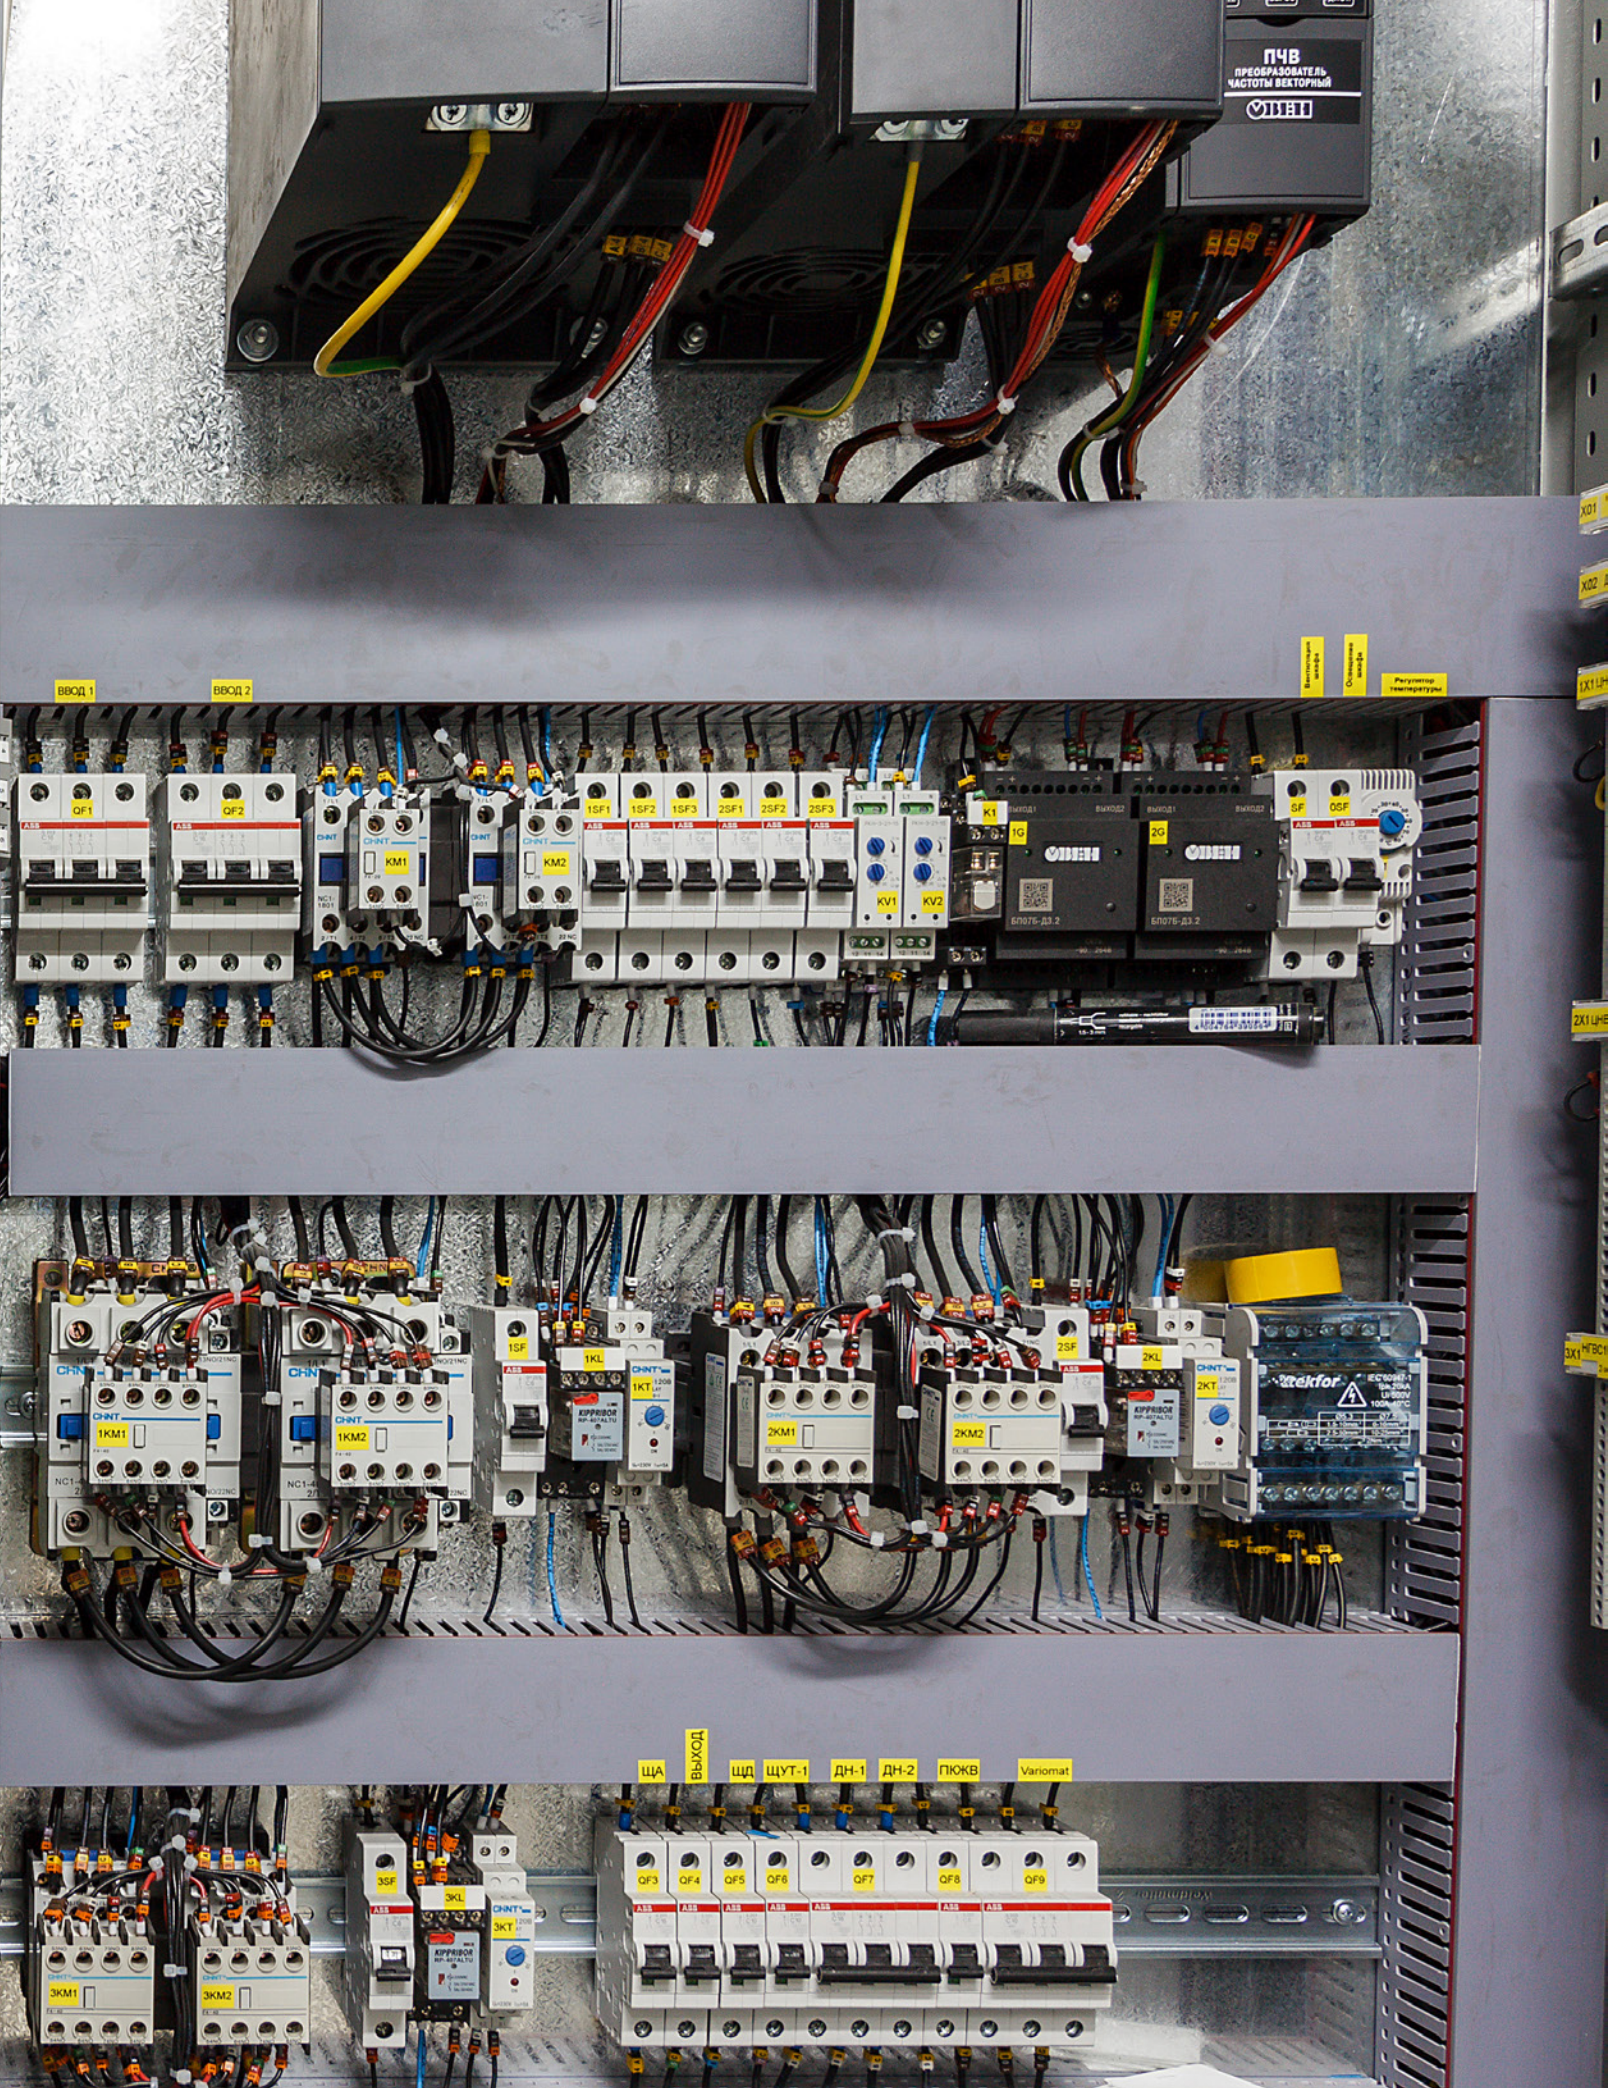
ПЧВ
ПРЕОБРАЗОВАТЕЛЬ ЧАСТОТЫ ВЕКТОРНЫЙ
ВВОД 1
ВВОД 2
QF1
QF2
KM1
KM2
1SF1
1SF2
1SF3
2SF1
2SF2
2SF3
KV1
KV2
K1
1G
2G
SF
OSF
1KM1
1KM2
1SF
1KL
1KT
2KM1
2KM2
2SF
2KL
2KT
ЩА
ВЫХОД
ЩД
ЩУТ-1
ДН-1
ДН-2
ПЮКВ
Variomat
QF3
QF4
QF5
QF6
QF7
QF8
QF9
3SF
3KL
3KT
3KM1
3KM2

UNIVERSAL BREAKER LOCKS

ONE POLE



UBL1

FEATURES
- Works with most breaker brands
- US Patent #8,598,477


APPLICATIONS
- Use to secure 2 or 3 pole breakers from being activated

STANDARD MATERIAL
- Steel construction

STANDARD FINISH
- Zinc plated or red NFPA 72, blue powder coat

PART #	FINISH	COMPATIBLE BREAKER BANDS	MASTER QTY.
UBL1	PLATED	BRYANT, CUTLER HAMMER, GE, ITE, SIEMENS, SQUARE D, ZINSCO, WESTINGHOUSE, T&B, CHLLENGER, EATON	25
UBL1-UPC	PLATED		5 PACK
UBL1-RED	RED		25
UBL1-BLU	BLUE		25

TWO AND THREE POLE



UBL2P

FEATURES
- Bolt on locking bar prevents movement
- Works with most breaker brands
- Steel construction
- Zinc plated
- US Patent #8,598,477

APPLICATIONS
- Use to secure 1-pole breakers from being activated

STANDARD MATERIAL
- Zinc plated

PART #	COLOR	FITS BREAKER	DESCRIPTION	MASTER QTY.
UBL2P	ZINC PLATED	BRYANT, CUTLER HAMMER, GE, ITE, SIEMENS, SQUARE D, ZINSCO, WESTINGHOUSE, T&B, CHLLENGER, EATON	2 POLE BREAKER	10
UBL3P	ZINC PLATED		3 POLE BREAKER	10

ONE POLE, WITH PADLOCK



UBL2

FEATURES
- Works with most breaker brands
- Brass key-lock included
- .059" thick steel construction
- NFPA 72 red powder coat
- Meets NEC 760.4(B)
- US Patent #8,598,477

APPLICATIONS
- Use to secure 1-pole breakers from being activated

PART #	COLOR	INCLUDES KEYS	COMPATIBLE BREAKER BRAND	MASTER QTY.
UBL2	RED	INDEPENDENT	BRYANT, CUTLER HAMMER, GE, ITE, SIEMENS, SQUARE D, ZINSCO, WESTINGHOUSE, T&B, CHLLENGER, EATON	1

1" AND 3/4" BREAKER FILLER PLATE

NO SLIP DESIGN



BF075SQD



BF100U

FEATURES

- Peel and stick design ensures placement and will not displace when panel cover is removed
- UL94, V2
- Patented

APPLICATIONS

- Use to fill unused 1" and 3/4" breaker positions

STANDARD MATERIAL

- Plastic

PART #	COMPATIBLE BREAKER BANDS	MASTER QTY.
BF075SQD	SQUARE-D: QO & QOB	100
BF100U	GE, CUTER HAMMER "BR", CROUSE HINDS, SIEMENS, MURRAY, THOMAS & BETTS, SQUARE-D "HOMELINE, BRYANT, CHALLENGER, WESTINGHOUSE	100

1/0-14CL 13-11
1GIU-C 11-22
1GIU-G 11-22
1GIU-W 11-22
1ML-110-110MI....3-21
1TZ 3-28
1-WBA 12-11
1-WBAS 12-12
2-1/2-WBA....12-11
2-1/2-WBAS....12-12
2BRT12TZ....12-111
2BRT20TZ....12-111
2BRT32TZ....12-111
2FMP28TZ....12-120
2GIU-C 11-25
2GIU-G 11-25
2GIU-W 11-25
2H4TZ....12-37
2TZ 3-28
2-WBA 12-11
2-WBAS 12-12
3....3-28
3/0-6CL 13-11
3-WBA 12-11
4....3-28
4BRT20TZ....12-111
4BRT20WSTZ....12-110
4BRT32TZ....12-111
4BRT32WSTZ....12-110
4BRT64TZ....12-111
4G16HTZ....12-131
4G16TZ....12-131
4H24TZ....12-37
4H58TZ....12-37
4H912TZ....12-37
4SSLD-1/2 10-101
4TI24TZ 12-38
4TI58TZ 12-38
4TI912TZ 12-38
4TIBTZ 12-57
4TITZ 12-60
4-WBA 12-11
4-WBAS 12-12
4Z4STZ....12-60
4Z34TZ....12-60
4Z346MTZ 12-21
4Z348PTZ 12-20
4Z3412PTZ 12-20
4Z3416MTZ 12-21
4Z3416PTZ 12-20
4Z34812MTZ 12-21
5BC....10-43
5CP....10-43
5PF5075 10-46
5PF5075AB....10-46
5SQ5075....10-42
5SQ5075OW 10-42
5SQ50100....10-42
5SQ100125....10-42
5SQ5075100....10-42
5SQBLNK 10-42
5-WBA 12-11
5-WBAS 12-12
5XT5075 10-42
6A24TZ....12-39
6A912TZ....12-39
6BC....10-50
6CP....10-51
6M4ITZ 12-8
6M24SMTZ 12-3
6M24TZ 12-2
6M58TZ 12-2
6M912SMTZ 12-3
6M912TZ 12-2
6MATATZ....12-124
6MB18ATZ 12-25
6MFTZ 12-89
6MTZ 12-8
6TIBTZ 12-57
6TITZ 12-60
6TTZ 12-60
6-WBAS 12-12
6Z34TZ....12-60
6Z348PTZ....12-20
6Z3412PTZ 12-20
6Z3416MTZ 12-21
6Z3416PTZ 12-20
6Z34812MTZ 12-21
7-WBAS 12-12
8P8PTZ....12-7
8P24SMTZ 12-5
8P24TZ....12-4
8P58SMTZ 12-5
8P58TZ....12-4
8P912SMTZ 12-5
8P912TZ....12-4
8PATSTZ....12-125
8PTZ....12-7
8-WBAS 12-12
9-WBAS 12-12
11....9-5
12....9-5
12P24SMTZ 12-5
12P24TZ....12-4
12P58SMTZ 12-5
12P58TZ....12-4
12P912SMTZ 12-5
12P912TZ....12-4
12PTZ....12-7
12WFS 12-80
12WFSS 12-80
13....9-5
13WFS 12-80
13WFSS 12-80
14....9-5
14WFS 12-80
14WFSS 12-80
15....9-5
16....9-5
16M4ITZ 12-8
16M24SMTZ 12-3
16M24TZ 12-2
16M58SMTZ 12-3
16M912SMTZ 12-3
16M912TZ 12-2
16MB18ATZ 12-25
16MFTZ 12-89
16MTZ 12-8
16P24SMTZ 12-5
16P24TZ 12-4
16P58SMTZ 12-5
16P58TZ 12-4
16P912SMTZ 12-5
16P912TZ 12-4
16PTZ 12-7
17....9-5
17AB....12-116
17BB....12-116
17CB....12-116
18....9-5
19....9-5
20....9-5
20A....9-5
20B....9-5
20M4ITZ 12-8
20M24SMTZ 12-3
20M24TZ 12-2
20M58SMTZ 12-3
20M912SMTZ 12-3
20MFTZ 12-89
20MTZ 12-8
21....9-1
22....9-1
23....9-1
23WBJ....12-71
24....9-1
24C6....10-63
24M4ITZ 12-8
24M24SMTZ 12-3
24M58SMTZ 12-3
24MTZ 12-8
24WBJ....12-71
25TZ....9-1
26....12-49
26TZ....9-1
27....12-49
27TZ....9-1
28....9-1
29....12-49
29TZ....9-1
30....9-1
31....13-5
32....13-5
32-1....12-95
32M4ITZ 12-8
32M24SMTZ 12-3
32M24TZ 12-2
32M58SMTZ 12-3
32M912SMTZ 12-3
32MTZ 12-8

INDEX

33 13-5
33R 10-62, 10-69
33S 10-27
34-1 12-95
36-1 12-95
38ASTSW 3-2
40ASTSW 3-2
43-5P 12-98, 10-146
43-50 ..... 12-98, 10-146
43-100 ..... 12-98, 10-146
45TZ 12-62
49 ..... , 10-143
49L ..... , 10-143
49XL ..... , 10-143
50 ..... , 10-143
50A250 ..... 4-12, 4-13
50A350 ..... 4-12, 4-13
50A450 ..... 4-12, 4-13
50A560 ..... 4-12, 4-13
50A650 ..... 4-12, 4-13
50SLT 2-13, 8-47
51 9-10
51AMR-1 10-44
51AMR-158 10-44
51SLT 2-13, 8-47
52 9-10
52AMR-2 10-45
52C1 10-17
52C1-OCT 10-72
52C1-RED 10-135
52C1-VT 10-124
52C1-VTRED 10-124, 10-135
52C2-5/8 10-20
52C3 10-25
52C3-1 10-25
52C3-1-1/2 10-25
52C3-1-1/4 10-25
52C3-1/2U 10-25
52C3-2 10-25
52C3-3/4 10-25
52C3-3/4U 10-25
52C3-5/8 10-25
52C3-5/8U 10-25
52C3-F 10-25
52C4-1 10-24
52C4-1-1/4 10-24
52C4-1/2 10-24
52C4-3/4 10-24
52C4-5/8 10-24
52C4-F 10-24
52C6 10-17
52C6-VT-SS 10-124
52C09 10-20
52C10 10-20
52C11 10-20
52C12 10-20
52C12-1 10-20
52C12-3/4 10-20
52C13 10-18
52C13SQ 10-19
52C13-SS 10-18
52C14 10-18
52C14-5/8 10-18
52C14SQ 10-19
52C14-SS 10-18
52C15 10-18
52C15SQ 10-19
52C15-SS 10-18
52C16 10-18
52C16SQ 10-19
52C16-SS 10-18
52C17 10-21
52C17SQ 10-22
52C17-SS 10-21
52C18 10-21
52C18-5/8 10-21
52C18SQ 10-22
52C18-SS 10-21
52C19 10-21
52C19SQ 10-22
52C20 10-21
52C20A 10-21
52C20A-SS 10-21
52C20-SS 10-21
52C21 10-21
52C21SQ 10-22
52C21-SS 10-21
52C22 10-18
52C22SQ 10-19
52C22-SS 10-18
52C23 10-18
52C23SQ 10-19
52C23-SS 10-18
52C24 10-21
52C24SQ 10-22
52C24-SS 10-21
52C25 10-21
52C25SQ 10-22
52C26 10-18
52C28 10-18
52C50 10-26
52C62 10-18
52C62A 10-18
52C62A-SS 10-18
52C62-SS 10-18
52C75 10-26
52SLT 2-13, 8-47
53 9-10
53C1-VT 10-124
53SLT 2-13, 8-47
54 9-10
54C1 10-71
54C1-R 10-60
54C1-RED 10-140
54C1-VT 10-130
54C3 10-61
54C3-1 10-61
54C3-1-1/2 10-61
54C3-1-1/4 10-61
54C3-2 10-61
54C3-3/4 10-61
54C3-5/8 10-61
54C3-F 10-61
54C3-RED 10-140
54C6 10-71
54C6-R 10-60
54C6-VTSS 10-130
54C40 10-71
54C41 10-71
54C42 10-71
54C50 10-72
54CBPO 10-60
54SLT 2-13, 8-47
55 9-10
55SLT 2-13, 8-47
56 9-10
56SLT 2-13, 8-47
57 9-10
58 9-10
59 9-10
60 9-10
60A 9-10
60B 9-10
61 9-4
61-1 10-51
61-1-1/2 10-51
61-1-1/4 10-51
61-1/2 10-51
61-2 10-51
61-3/4 10-51
61-5/8 10-51
61AMR 10-52
61AMR-158 10-52
62 9-4
62-1 10-52
62-1-1/2 10-52
62-1-1/4 10-52
62-1/2 10-52
62-2 10-52
62-3/4 10-52
62-5/8 10-52
62AMR-2 10-53
63 9-4
63AMR-3 10-53
64 9-4
65 9-4
66 9-4
67 9-4
68 9-4
69 9-4
70 9-4
70A 9-4
70A36 9-7
70A48 9-7
70B 9-4
70B36 9-7
70B48 9-7
70B60 9-7
71 10-83
72C1 10-34

72C1-RED 10-137
72C1-VT 10-127
72C1-VTRED 10-127, 10-137
72C3 10-39
72C3-1 10-39
72C3-1-1/2 10-39
72C3-1-1/4 10-39
72C3-2 10-39
72C3-3/4 10-39
72C3-5/8 10-39
72C3-F 10-39
72C4-5/8 10-38
72C4S-1/2 10-41
72C4S-3/4 10-41
72C6 10-34
72C6-VTSS 10-127
72C13 10-35
72C14 10-35
72C14-5/8 10-35
72C15 10-35
72C16 10-35
72C17 10-36
72C18 10-36
72C18-5/8 10-36
72C19 10-36
72C20 10-36
72C20A 10-36
72C21 10-36
72C22 10-35
72C23 10-35
72C24 10-36
72C25 10-36
72C29 10-40
72C32 10-40
72C35 10-40
72C36 10-40
72C37 10-40
72C38 10-40
72C39 10-40
72C40 10-40
72C41 10-40
72C42 10-40
72C44 10-40
72C45 10-40
72C47 10-40
72C48 10-40
72C49 10-40
72C50 10-40
72C51 10-40
72C52 10-40
72C62 10-35
72C62A 10-35
72CP 10-41
72CP-SS 10-41
73C1-VT 10-127
75A250 ..... 4-12, 4-13
75A350 ..... 4-12, 4-13
75A450 ..... 4-12, 4-13
75A560 ..... 4-12, 4-13
75A650 ..... 4-12, 4-13
75B750 ..... 4-12, 4-13
75B850 ..... 4-12, 4-13
81 9-1
82 9-1
83 9-1
84 9-1
85 9-1
86 9-1
87 9-1
88 9-1
89A 9-1
89A15 9-3
89A22 9-2
89A30 9-2
89A36 9-3
89A48 9-3
89TZ 9-1
100 3-20
100B560 ..... 4-12, 4-13
100B650 ..... 4-12, 4-13
100B750 ..... 4-12, 4-13
100B850 ..... 4-12, 4-13
100C950 ..... 4-12, 4-13
100C1050 ..... 4-12, 4-13
100I 3-20
100M 3-21
100STSW 3-19
101 3-20
101I 3-20
101M 3-21
101MI 3-21
101STSW 3-19
102 ..... 10-95, 3-20
102I 3-20
102M 3-21
102MI 3-21
103 3-20
103I 3-20
103M 3-21
103MI 3-21
104 3-20
104I 3-20
104M 3-21
104MI 3-21
105 3-20
105I 3-20
105M 3-21
105MI 3-21
106 3-20
106I 3-20
106M 3-21
106MI 3-21
107 3-20
107M 3-21
107MI 3-21
108 3-20
108M 3-21
108MI 3-21
109 3-20
109M 3-21
109MI 3-21
110 3-20
110M 3-21
110MI 3-21
111 8-19
111MHDG 8-19
112 8-19
112MHDG 8-19
113 8-19
113MHDG 8-19
114 8-19
114MHDG 8-19
115 8-19
115MHDG 8-19
116 8-19
116MHDG 8-19
117 8-19
117MHDG 8-19
118 8-19
118MHDG 8-19
119AMHDG 8-19
119MHDG 8-19
120 4-1
120SNP 4-1
121 3-10
121A 3-10
122 12-49
122TZ 12-40
123 ..... 8-54, 12-34
123A 12-49
123TZ 12-49
124TZ 12-49
126TZ 12-52
130CSL 3-3
130STSW 3-9
130TZ 3-10
131TZ 3-14
131TZ 1-12
132TZ 3-14
132TZ 1-12
133TZ 3-14
133TZ 1-12
136 5-2
137 5-2
138 5-2
139 5-2
140TZ 3-11
140TZ 4-6
141 10-146
141A 10-146
143R 4-3
144R 4-3
145R 4-3
146R 4-3
150 3-16
150M 3-17
151I 3-16
151M 3-17
151MI 3-17
151TZ 3-16

INDEX

152 3-16
152I 3-16
152M 3-17
152MI 3-17
153 3-16
153I 3-16
153M 3-17
153MI 3-17
154 3-16
154I 3-16
154M 3-17
154MI 3-17
155 3-16
155I 3-16
155M 3-17
155MI 3-17
156 3-16
156I 3-16
156M 3-17
156MI 3-17
157 3-16
157M 3-17
157MI 3-17
158 3-16
158M 3-17
158MI 3-17
159 3-16
159M 3-17
159MI 3-17
160 3-16
160M 3-17
160MI 3-17
161 1-16
162TZ 1-16
170LP 3-8
170STSW 3-7
170TZ 3-8
180 ..... 3-14, 4-7
181 ..... 1-12, 3-14
182 ..... 1-12, 3-14
182A 1-12, 3-14
183 12-95
183I 12-95
184 12-95
184I 12-95
185 12-95
185I 12-95
187 10-146
187A 12-98, 10-146
188 ..... 12-98, 10-146
189B 12-98, 10-146
191 3-9
193 12-95
194 12-95
195 12-95
201AL 8-15
201B 8-14
201BAL 8-15
201MHDG 8-16
201TZ 8-14
202 8-14
202AL 8-15
202B 8-14
202BAL 8-15
202MHDG 8-16
203 8-14
203AL 8-15
203B 8-14
203BAL 8-15
203MHDG 8-16
204 8-14
204AL 8-15
204B 8-14
204BAL 8-15
204MHDG 8-16
205 8-14
205AL 8-15
205B 8-14
205BAL 8-15
205MHDG 8-16
206 8-14
206AL 8-15
206B 8-14
206BAL 8-15
206MHDG 8-16
207 8-14
207AL 8-15
207B 8-14
207BAL 8-15
207MHDG 8-16
208 8-14
208AL 8-15
208B 8-14
208BAL 8-15
208MHDG 8-16
209 8-14
209AL 8-15
209B 8-14
209BAL 8-15
209MHDG 8-16
210 8-14
210AL 8-15
210AMHDG 8-16
210B 8-14
210BAL 8-15
210BMHDG 8-16
210MHDG 8-16
211TZ 5-8
212 5-8
213TZ 5-8
214 5-8
214XL 5-8
215 5-8
216 5-8
216XL 5-8
230S 2-10
230SGR 2-12
230TBS 3-5
231CSGR 2-12
231HDG 2-11
231S 2-10
231SGR 2-12
231TBS 3-5
232A 5-1, 12-32, 12-34
232CSGR 2-12
232HDG 2-11
232S 2-10
232SGR 2-12
232TBS 3-5
233CSGR 2-12
233HDG 2-11
233S 2-10
233SGR 2-12
234CSGR 2-12
234HDG 2-11
234S 2-10
234SGR 2-12
235CSGR 2-12
235HDG 2-11
235S 2-10
235SGR 2-12
236CSGR 2-12
236HDG 2-11
236S 2-10
236SGR 2-12
237S 2-10
237SGR 2-12
238S 2-10
238SGR 2-12
239S 2-10
239SGR 2-12
240S 2-10
240SGR 2-12
241 8-40
242 8-40
243 8-40
244 8-40
245 8-40
246 8-40
247 8-40
248 8-40
249 8-40
250 8-40
251M 8-10
251MRT 8-12
251SRT 8-11
251TZ 8-10
252 8-10
252M 8-10
252MRT 8-12
252SRT 8-11
253 8-10
253M 8-10
253MRT 8-12
253SRT 8-11
254 8-10
254M 8-10
254MRT 8-12
254SRT 8-11
255 8-10

INDEX

255M 8-10
255MRT 8-12
255SRT 8-11
256 8-10
256M 8-10
256MRT 8-12
256SRT 8-11
257MRT 8-12
257TZ 8-10
258MRT 8-12
258TZ 8-10
259 8-10
259MRT 8-12
260A 8-10
260B 8-10
260MRT 8-12
260TZ 8-10
261 8-8
261I 8-8
261M 8-9
261MIRT 8-12
261SIRT 8-11
262 8-8
262I 8-8
262M 8-9
262MIRT 8-12
262SIRT 8-11
263 8-8
263I 8-8
263M 8-9
263MIRT 8-12
263SIRT 8-11
264 8-8
264I 8-8
264M 8-9
264MIRT 8-12
264SIRT 8-11
265I 8-8
265M 8-9
265MIRT 8-12
265SIRT 8-11
265TZ 8-8
266I 8-8
266M 8-9
266MIRT 8-12
266SIRT 8-11
266TZ 8-8
267I 8-9
267MIRT 8-12
267TZ 8-9
268I 8-9
268MIRT 8-12
268TZ 8-9
269I 8-9
269MIRT 8-12
269TZ 8-9
270 8-9
270A 8-9
270B 8-9
270I 8-9
270MIRT 8-12
271 .... 1-8, 2-13
272 .... 1-8, 2-13
273 .... 1-8, 2-13
278 10-83
279 10-83
280 10-83
281 8-41
281UL 8-41
282 8-41
282A 5-1, 12-32, 12-34
282UL 8-41
283 8-41
283UL 8-41
284 8-41
284A 5-1, 12-32, 12-34
284UL 8-41
285 8-41
285UL 8-41
286 8-41
286UL 8-41
287 8-41
287UL 8-41
288TZ 8-41
288UL 8-41
289 8-41
289UL 8-41
290A 8-41
290B 8-41
290TZ 8-41
290UL 8-41
291 8-48
292 8-48
293 8-48
294 8-48
295 8-48
296 8-48
298S 12-133
300 12-133
300A 12-133
300B 12-133
301 8-23
301CB 8-24
301M 8-23
302 8-23
302CB 8-24
302M 8-23
303 8-23
303CB 8-24
303M 8-23
304 8-23
304B2TZ 12-97
304CB 8-24
304M 8-23
305 8-23
305CB 8-24
305M 8-23
306 8-23
306CB 8-24
306M 8-23
307 8-23
307CB 8-24
307M 8-23
308 8-23
308CB 8-24
308M 8-23
309CB 8-24
309M 8-23
309TZ 8-23
310 8-23
310ACB 8-24
310AM 8-23
310BCB 8-24
310BM 8-23
310CB 8-24
310M 8-23
311 8-25
311M 8-25
311MHDG 8-26
312 8-25
312M 8-25
312MHDG 8-26
313 8-25
313M 8-25
313MHDG 8-26
314 8-25
314M 8-25
314MHDG 8-26
315 8-25
315M 8-25
315MHDG 8-26
316 8-25
316M 8-25
316MHDG 8-26
317 8-25
317M 8-25
317MHDG 8-26
318 8-25
318M 8-25
318MHDG 8-26
319 8-25
319M 8-25
319MHDG 8-26
320 8-25
320AM 8-25
320BM 8-25
320M 8-25
320MHDG 8-26
321 8-27
321M 8-27
322 8-27
322M 8-27
323 8-27
323M 8-27
324M 8-27
324TZ 8-27
325 8-27
325M 8-27
326 8-27
326M 8-27

INDEX

327 8-27
327M 8-27
328 8-27
328M 8-27
329 8-27
329M 8-27
330 8-27
330AM 8-27
330BM 8-27
330M 8-27
331 8-33
331CMHDG 8-30
331M 8-28
331MHDG 8-29
331MSS 8-32
332 8-33
332CMHDG 8-30
332M 8-28
332MHDG 8-29
332MSL 8-31
332MSS 8-32
332SL 8-34
333 8-33
333CMHDG 8-30
333M 8-28
333MHDG 8-29
333MSL 8-31
333MSS 8-32
333SL 8-34
334 8-33
334A 8-33
334AM 8-28
334AMSL 8-31
334ASL 8-34
334CMHDG 8-30
334M 8-28
334MHDG 8-29
334MSL 8-31
334MSS 8-32
334SL 8-34
335 8-33
335A 8-33
335AM 8-28
335AMSL 8-31
335ASL 8-34
335CMHDG 8-30
335M 8-28
335MHDG 8-29
335MSL 8-31
335MSS 8-32
335SL 8-34
336A 8-33
336AM 8-28
336AMSL 8-31
336ASL 8-34
336CMHDG 8-30
336M 8-28
336MHDG 8-29
336MSL 8-31
336MSS 8-32
336SL 8-34
336TZ 8-33
337 8-33
337A 8-33
337AM 8-28
337CMHDG 8-30
337M 8-28
337MHDG 8-29
337MSS 8-32
338 8-33
338A 8-33
338AM 8-28
338CMHDG 8-30
338M 8-28
338MHDG 8-29
338MSS 8-32
339 8-33
339A 8-33
339AM 8-28
339CMHDG 8-30
339M 8-28
339MHDG 8-29
339MSS 8-32
340 8-33
340A 8-33
340ALM 8-28
340ALMHDG 8-29
340AM 8-28
340AMSS 8-32
340BLM 8-28
340BLMHDG 8-29
340BMSS 8-32
340CMHDG 8-30
340M 8-28
340MHDG 8-29
340MSS 8-32
341 1-16
342 1-16
350 ..... 3-11, 4-9
350DS 3-12
350STSW 3-10
351 8-1
351SS 1-14, 8-2
352 8-1
352SS 1-14, 8-2
353SS 1-14, 8-2
353TZ 8-1
354 8-1
354SS 1-14, 8-2
360 ..... 3-13, 4-8
360M 3-13, 4-8
361SS 1-13, 8-2
361TZ 8-1
362SS 1-13, 8-2
362TZ 8-1
363SS 1-13, 8-2
363TZ 8-1
364SS 1-13, 8-2
364TZ 8-1
370TZ 3-12
371TZ 1-13
372TZ 1-13
381 1-14
382 1-14
383 1-14
384 1-14
390 3-18
391C 1-8, 8-47
391S 1-8, 8-46
392C 1-8, 8-47
392S 1-8, 8-46
393C 1-8, 8-47
393S 1-8, 8-46
411 13-4
412 13-4
413 13-4
420TBS 3-6
421TBS 3-6
422TBS 3-6
430TBS 3-6
431 1-16
431TBS 3-6
432TBS 3-6
432TZ 1-16
433 1-16
441 4-5
442 4-5
444 4-5
445 4-5
449TZ 12-89
450 3-22
450I 3-22
451 3-22
451I 3-22
452I 3-22
452TZ 3-22
453I 3-22
453TZ 3-22
454 3-22
454I 3-22
455 3-22
455I 3-22
456 3-22
456I 3-22
457 4-4
457Y 4-4
458 4-4
459 4-4
461 3-15
462 3-15
463 3-15
464 3-15
465 3-15
466 3-15
470 2-1
470I 2-1
470S 2-2
470SGR 2-5
470ST 2-3
471 2-1

INDEX

471CSGR 2-5
471HDG 2-4
471I 2-1
471S 2-2
471SGR 2-5
471ST 2-3
472 2-1
472CSGR 2-5
472HDG 2-4
472I 2-1
472S 2-2
472SGR 2-5
472ST 2-3
473 2-1
473CSGR 2-5
473HDG 2-4
473I 2-1
473S 2-2
473SGR 2-5
473ST 2-3
474 2-1
474CSGR 2-5
474HDG 2-4
474I 2-1
474S 2-2
474SGR 2-5
474ST 2-3
475 2-1
475CSGR 2-5
475HDG 2-4
475I 2-1
475S 2-2
475SGR 2-5
475ST 2-3
476 2-1
476CSGR 2-5
476HDG 2-4
476I 2-1
476S 2-2
476SGR 2-5
476ST 2-3
477 2-1
477HDG 2-4
477S 2-2
477SGR 2-5
478 2-1
478HDG 2-4
478S 2-2
478SGR 2-5
479 2-1
479HDG 2-4
479S 2-2
479SGR 2-5
480 2-1
480HDG 2-4
480S 2-2
480SA 2-2
480SB 2-2
480SGR 2-5
481 ..... 1-18, 8-55, 12-31
481HDG 8-55
482 ..... 1-18, 8-55, 12-31
482HDG 8-55
483 ..... 1-18, 8-55, 12-31
483HDG 8-55
484 ..... 1-18, 8-55, 12-31
484HDG 8-55
485 ..... 1-18, 8-55, 12-31
485HDG 8-55
486 ..... 1-18, 8-55, 12-31
486HDG 8-55
487 ..... 1-18, 8-55, 12-31
487HDG 8-55
488 ..... 1-18, 8-55, 12-31
488HDG 8-55
489 ..... 1-18, 8-55, 12-31
489A 1-18, 8-55, 12-31
489AHDG 8-55
489B 1-18, 8-55, 12-31
489BHDG 8-55
489C 1-18, 8-55, 12-31
489CHDG 8-55
489HDG 8-55
490 2-6
490I 2-6
490S 2-7
490SGR 2-9
490TBS 3-5
491 2-6
491CSGR 2-9
491HDG 2-8
491I 2-6
491S 2-7
491SGR 2-9
491TBS 3-5
492 2-6
492CSGR 2-9
492HDG 2-8
492I 2-6
492S 2-7
492SGR 2-9
492TBS 3-5
493 2-6
493CSGR 2-9
493HDG 2-8
493I 2-6
493S 2-7
493SGR 2-9
493TBS 3-5
494 2-6
494CSGR 2-9
494HDG 2-8
494I 2-6
494S 2-7
494SGR 2-9
495 2-6
495CSGR 2-9
495HDG 2-8
495I 2-6
495S 2-7
495SGR 2-9
496 2-6
496CSGR 2-9
496HDG 2-8
496I 2-6
496S 2-7
496SGR 2-9
497 2-6
497S 2-7
497SGR 2-9
498 2-6
498HDG 2-8
498S 2-7
498SGR 2-9
499 2-6
499S 2-7
499SGR 2-9
500 2-6
500S 2-7
500SGR 2-9
501 12-32
502 12-32
503 12-32
504 12-32
506 ..... 5-1, 12-32
507 ..... 5-1, 12-32
508 ..... 5-1, 12-32
509 ..... 5-1, 12-32
510BX 3-28
510RX 4-7, 5-1, 12-32
511 ..... 1-17, 12-29
512HDTZ 12-126
512TZ 1-17
512TZ 12-127
513 1-17
514 1-17
515 1-17
515ATZ 12-132
516 1-17
517TZ 1-17, 8-51, 12-28, 12-29
518TZ 1-17, 8-51, 12-28, 12-29
519 ..... 1-17, 8-51, 12-28, 12-29
520 ..... 1-17, 8-51, 12-28
521TZ 1-17, 12-33
522 ..... 1-17, 12-33
523 ..... 1-17, 12-29, 12-33
524 ..... 1-17, 12-33
525 ..... 1-17, 12-33
526 ..... 1-17, 12-33
527 ..... 1-17, 8-54, 12-33, 12-34
528TZ 1-17, 8-54, 12-33, 12-34
529TZ 1-17, 8-54, 12-33, 12-34
530A 8-54, 12-34
530B 8-54, 12-34
530TZ 1-17, 8-54, 12-33, 12-34
531 ..... 8-51, 12-28
531B 8-51, 12-28
532 ..... 8-51, 12-28
533 ..... 8-51, 12-28
534 ..... 8-51, 12-28

INDEX

535 ..... 8-51, 12-28
536 ..... 8-51, 12-28
541 ..... 8-54, 12-34
542 ..... 8-54, 12-34
543 ..... 8-54, 12-34
544 ..... 8-54, 12-34
545 ..... 8-54, 12-34
546 ..... 8-54, 12-34
551TZ 8-43
552TZ 8-43
553TZ 8-43
554TZ 8-43
555TZ 8-43
556 8-43
557 8-43
558 8-43
559 8-43
560 8-43
561 ..... 8-53, 12-30
561A 3-12
561ADC 3-12
561HDG 8-53
562 ..... 8-53, 12-30
562HDG 8-53
563 ..... 8-53, 12-30
563HDG 8-53
564 ..... 8-53, 12-30
564HDG 8-53
565 ..... 8-53, 12-30
565HDG 8-53
566 ..... 8-53, 12-30
566HDG 8-53
567 ..... 8-53, 12-30
567HDG 8-53
568HDG 8-53
568TZ 8-53, 12-30
569 ..... 8-53, 12-30
569HDG 8-53
570 ..... 8-53, 12-30
570A 8-53, 12-30
570AHDG 8-53
570B 8-53, 12-30
570BHDG 8-53
570HDG 8-53
571 6-17
571MHDG 6-17
571S 6-18
572 6-17
572MHDG 6-17
572S 6-18
573 6-17
573MHDG 6-17
573S 6-18
574 6-17
574MHDG 6-17
574S 6-18
576 6-17
576MHDG 6-17
576S 6-18
577 6-17
577MHDG 6-17
577S 6-18
579 6-17
579MHDG 6-17
579S 6-18
581 6-16
582 6-16
583 6-16
584 6-16
586 6-16
587 6-16
589 6-16
590 ..... 1-12, 3-15
591TZ 5-7
593 5-7
594 5-7
595 5-7
596 5-7
596A 5-7
601TZ 8-52
602TZ 8-52
603TZ 8-52
604 ..... 8-52, 12-10
604A 8-52
605 8-52
606 8-52
607 8-52
608TZ 8-52
609TZ 8-52
610 8-52
620BP 13-3
620DB 13-2
620Z 13-3
621A 13-4
621B 13-4
621TZ 13-4
622 13-4
622A 13-4
622B 13-4
623 13-4
623A 13-4
623B 13-4
624 13-4
624A 13-4
624B 13-4
625TZ2 13-2
626A 13-3
626B 13-3
626BS 13-3
626C 13-3
626D 13-3
626TZ 13-2
627TZ 13-2
628 13-2
629 13-2
630 13-1
630B 13-1
630DB 13-1
630TBS 3-4
631 1-10
631I 1-10
631S 1-5
631SI 1-5
631TBS 3-4
632 1-10
632I 1-10
632S 1-5
632SI 1-5
632TBS 3-4
633 1-10
633I 1-10
633S 1-5
633SI 1-5
633TBS 3-4
634 1-10
634I 1-10
634S 1-5
634SI 1-5
634TBS 3-4
635 1-10
635I 1-10
635S 1-5
635SI 1-5
635TBS 3-4
636 1-10
636I 1-10
636S 1-5
636SI 1-5
636TBS 3-4
637 ..... 1-10, 8-3
637I 1-10, 8-3
637S 1-5, 8-5
637SI 1-5, 8-5
637TBS 3-4
638 ..... 1-10, 8-3
638I 1-10, 8-3
638S 1-5, 8-5
638SI 1-5, 8-5
638TBS 3-4
639 ..... 1-10, 8-3
639I 1-10, 8-3
639S 8-5
639S 1-5
639SI 1-5, 8-5
639TBS 3-4
640 ..... 1-10, 8-3
640I 1-10, 8-3
640S 8-5
640S 1-5
640SA 8-5
640SB 8-5
640SI 1-5, 8-5
640TBS 3-4
641 1-11
641S 1-6
642 1-11
642S 1-6
643 1-11
643S 1-6
644 1-11

INDEX

644S....1-6
645....1-11
645S....1-6
646....1-11
646S....1-6
647....1-11
647S....1-6, 8-6
648....1-11
648S....1-6, 8-6
649....1-11
649S....1-6, 8-6
650....1-11
650S....1-6, 8-6
650SA....8-6
650SB....8-6
651....1-9
651I....1-9
651S....1-1
651SI....1-1
651SIRT....1-2
651SRT....1-2
652....1-9
652I....1-9
652S....1-1
652SI....1-1
652SIRT....1-2
652SRT....1-2
653....1-9
653I....1-9
653S....1-1
653SI....1-1
653SIRT....1-2
653SRT....1-2
654....1-9
654I....1-9
654S....1-1
654SI....1-1
654SIRT....1-2
654SRT....1-2
655....1-9
655I....1-9
655S....1-1
655SI....1-1
655SIRT....1-2
655SRT....1-2
656....1-9
656I....1-9
656S....1-1
656SI....1-1
656SIRT....1-2
656SRT....1-2
657....1-9
657I....1-9
657S....1-1
657SI....1-1
657SIRT....1-2
657SRT....1-2
658....1-9
658I....1-9
658S....1-1
658SI....1-1
658SIRT....1-2
658SRT....1-2
659I....1-9
659S....1-1
659SI....1-1
659SIRT....1-2
659SRT....1-2
659TZ....1-9
660I....1-9
660S....1-1
660SI....1-1
660SIRT....1-2
660SRT....1-2
660TZ....1-9
661....1-9
661S....1-1
661SRT....1-3
662....1-9
662S....1-1
662SRT....1-3
663....1-9
663S....1-1
663SRT....1-3
664....1-9
664S....1-1
664SRT....1-3
665....1-9
665S....1-1
665SRT....1-3
666....1-9
666S....1-1
666SRT....1-3
667....1-9
667S....1-1
667SRT....1-3
668....1-9
668S....1-1
668SRT....1-3
669....1-9
669S....1-1
669SRT....1-3
670....1-9
670S....1-1
670SRT....1-3
671....8-4
671S....8-4
672....8-4
672S....8-4
673S....8-4
674S....8-4
675S....8-4
676S....8-4
681MHDG....8-7
681S....8-7
682MHDG....8-7
682S....8-7
683MHDG....8-7
683S....8-7
684MHDG....8-7
684S....8-7
685MHDG....8-7
685S....8-7
686MHDG....8-7
686S....8-7
690....13-7
691TZ....13-7
692TZ....13-7
693....13-7
694....13-7
695....13-7
696....13-7
697....13-7
698TZ....13-7
699TZ....13-7
700TZ....13-7
701TZ....13-7
703TZ....13-7
704TZ....5-5
705TZ....5-5
706TZ....5-5
707....5-5
708....5-5
709....5-2
710....5-2
711....8-42
711SR....8-42
712....8-42
712SR....8-42
713....8-42
713SR....8-42
714....8-42
714SR....8-42
715....8-42
715SR....8-42
716....8-42
716SR....8-42
717....8-42
717SR....8-42
718....8-42
718SR....8-42
719....8-42
719SR....8-42
720....8-42
720A....8-42
720B....8-42
720SR....8-42
727....5-5
729....5-5
731....5-3
732TZ....5-3
733....5-3
734....5-3
735....5-3
736....5-3
737....5-3
738....5-3
739....5-3
740....5-3
741....5-4

742 5-4
743 5-4
744 5-4
745 5-4
746 5-4
747 5-4
748 5-4
749TZ 5-4
750 5-4
750A 5-4
750B 5-4
751 8-20
751A 8-20
751I 8-20
751M 8-21
751MI 8-21
752 8-20
752A 8-20
752I 8-20
752M 8-21
752MI 8-21
753 8-20
753I 8-20
753M 8-21
753MI 8-21
754 8-20
754I 8-20
754M 8-21
754MI 8-21
755 8-20
755I 8-20
755M 8-21
755MI 8-21
756 8-20
756I 8-20
756M 8-21
756MI 8-21
757 8-20
757I 8-20
757M 8-21
757MI 8-21
758 8-20
758I 8-20
758M 8-21
758MI 8-21
759 8-20
759I 8-20
759M 8-21
759MI 8-21
760 8-20
760A 8-21
760B 8-21
760I 8-20
760M 8-21
760MI 8-21
761HDG 12-70
762HDG 12-70
763HDG 12-70
764HDG 12-70
765HDG 12-70
766ATZ 12-90
766HDG 12-70
766TZ 12-90
767HDG 12-70
768HDG 12-70
769HDG 12-70
770HDG 12-70
770TZ 12-133
771 1-15
771GLT 6-33
771S 6-34
772 1-15
772GLT 6-33
772S 6-34
773 1-15
773GLT 6-33
773S 6-34
774GLT 6-33
774S 6-34
775GLT 6-33
775S 6-34
776GLT 6-33
776S 6-34
777GLT 6-33
777S 6-34
779GLT 6-33
779S 6-34
781TZ 1-15
782TZ 1-15
792 13-8
794 13-8
795 13-8
796 13-8
797 13-8
799 13-8
801TZ 13-8
803TZ 13-8
805TZ 13-12
806TZ 13-12
807TZ 13-12
808TZ 13-12
809TZ 13-12
810DB 13-12
810TZ 13-11
811TZ 13-11
812M4ITZ 12-8
812M24SMTZ 12-3
812M24TZ 12-2
812M58SMTZ 12-3
812M58TZ 12-2
812M912SMTZ 12-3
812M912TZ 12-2
812MATATZ 12-124
812MB18ATZ 12-25
812MB18STZ 12-25
812MB18TZ 12-26
812MFTZ 12-89
812MTZ 12-8
812TZ 13-11
813 13-9
813B 13-9
817 13-12
818 13-12
819TZ 13-12
820TZ 13-10
821 13-10
822 13-10
823 13-10
824 13-10
825TZ 13-10
826TZ 13-10
827TZ 13-10
828 13-10
829 13-10
831TZ 8-24
832TZ 8-24
833 8-24
834TZ 8-24
835TZ 8-24
836 8-24
837TZ 8-24
838 8-24
839 8-24
840 8-24
840A 8-24
840B 8-24
851 8-17
851HDG 8-17
851S 8-18
852 8-17
852HDG 8-17
852S 8-18
853 8-17
853HDG 8-17
853S 8-18
854 8-17
854HDG 8-17
854S 8-18
855 8-17
855HDG 8-17
855S 8-18
856 8-17
856HDG 8-17
856S 8-18
857 8-17
857HDG 8-17
858 8-17
858HDG 8-17
859 8-17
859HDG 8-17
860 8-17
860A 8-17
860AHDG 8-17
860B 8-17
860BHDG 8-17
860HDG 8-17
860T 13-22
866BLU 13-22
866BRN 13-22
866GRN 13-22

INDEX

866GRY....13-22
866ORN....13-22
866RED....13-22
866T....13-22
866WHT....13-22
866YEL....13-22
871....4-10, 5-13
871S....5-13
872S....5-13
872TZ....5-13
872TZ....4-10
873....4-10, 5-13
873A....4-10, 5-13
873B....4-10, 5-13
874....4-10, 5-13
874A....4-10, 5-13
874B....4-10, 5-13
875....4-10, 5-13
875A....4-10, 5-13
876....4-10, 5-13
876A....4-10, 5-13
876B....4-10, 5-13
876C....4-10, 5-13
876D....4-10, 5-13
881....4-11
881A....4-11
881B....4-11
882....4-11
882A....4-11
882B....4-11
883A....4-11
883B....4-11
883C....4-11
883D....4-11
900....8-35
901....8-35
902....8-35
903....8-35
904TZ....8-35
905....8-35
906....8-35
907....8-35
908....8-35
909....8-35
910....8-35
912....8-35
913....8-35
914....8-35
915....8-35
916....8-35
917....8-35
918....8-35
919....8-35
920....8-35
921TZ....8-35
922TZ....8-35
923....8-35
924....8-35
925TZ....8-35
926TZ....8-35
927....8-35
928TZ....8-35
929....8-35
930....8-35
931....8-35
932TZ....8-35
933....8-35
934....8-35
935....8-35
936TZ....8-35
937....8-35
938....8-35
939....8-35
940....8-35
941....8-35
942....8-35
943....8-35
944....8-35
952TZ....4-3
953....4-3
954....4-3
955....4-3
956....4-3
961....5-8
965TZ....5-8
981S....8-39
982S....8-39
984TZ....5-6
985TZ....5-6
986TZ....5-6
987....5-6
994TZ....5-6
995TZ....5-6
996....5-6
997....5-6
998....5-11
999....5-9
1000....5-14
1000A....5-14
1001TZ....5-9
1002....5-10
1003....5-10
1004....5-11
1005TZ....5-11
1006....5-11
1007....5-11
1008....5-11
1011TZ....7-3
1012TZ....7-3
1013....7-3
1014....7-3
1015....7-3
1016....7-3
1017....7-3
1018....7-3
1019....7-3
1020....7-3
1020A....7-3
1020B....7-3
1021....7-3
1022....7-3
1023....7-3
1024....7-3
1025....7-3
1026....7-3
1027....7-3
1028....7-3
1029....7-3
1030A....7-3
1030B....7-3
1030TZ....7-3
1031....7-4
1032....7-4
1033....7-4
1034TZ....7-4
1035TZ....7-4
1036....7-4
1037....7-4
1038....7-4
1039....7-4
1040A....7-4
1040B....7-4
1040TZ....7-4
1041TZ....7-9
1042....7-9
1043TZ....7-9
1044....7-9
1045TZ....7-9
1046TZ....7-9
1047....7-9
1048....7-9
1049....7-9
1050A....7-9
1050A80....7-25
1050B....7-9
1050B80....7-25
1050TZ....7-9
1051TZ....7-8
1052....7-8
1053....7-8
1054....7-8
1055TZ....7-8
1056....7-8
1057....7-8
1058....7-8
1059....7-8
1060....7-8
1060A....7-8
1060A80....7-25
1060B....7-8
1060B80....7-25
1061....7-6
1062....7-6
1063....7-6
1064....7-6
1065....7-6
1066....7-6
1067....7-6
1068....7-6
1070....7-6

INDEX

1071 7-9
1072 7-9
1073 7-9
1074 7-9
1075 7-9
1076 7-9
1077 7-9
1078 7-9
1079 7-9
1080 7-9
1081 7-1
1082 7-1
1083 7-1
1084 7-1
1085 7-1
1086 7-1
1087 7-1
1088 7-1
1089 7-1
1090 7-1
1090A 7-1
1090B 7-1
1092 7-13
1094 7-2
1096 7-2
1097 5-14
1097A 5-14
1098 5-14
1099 5-14
1100 5-14
1101 7-6
1101TC 3-28
1102 7-6
1105TC 3-28
1106 5-14
1106TC 3-28
1107 5-14
1111 7-1
1112 7-1
1113 7-1
1114 7-1
1115 7-1
1116 7-1
1117 7-1
1118 7-1
1119 7-1
1120 7-1
1121 7-2
1122 7-2
1123 7-2
1124TZ 7-2
1125TZ 7-2
1126TZ 7-2
1127TZ 7-2
1128TZ 7-2
1129TZ 7-2
1130 7-2
1130A 7-2
1130B 7-2
1132 7-5
1133 7-5
1134 7-5
1135 7-5
1136 7-5
1137 7-5
1138 7-5
1139 7-5
1140 7-5
1141 7-10
1142 7-10
1143 7-10
1144 7-10
1145 7-10
1146 7-10
1147 7-10
1148 7-10
1149 7-10
1150 7-10
1151 7-11
1152 7-11
1153 7-11
1154 7-11
1155 7-11
1156 7-11
1157 7-11
1158 7-11
1159 7-11
1160 7-11
1161 7-11
1162 7-11
1163 7-11
1164 7-11
1165 7-11
1166 7-11
1167 7-11
1168 7-11
1169 7-11
1170TZ 7-11
1171TZ 7-12
1172TZ 7-12
1173TZ 7-12
1174TZ 7-12
1175TZ 7-12
1176TZ 7-12
1177TZ 7-12
1178TZ 7-12
1179TZ 7-12
1180 7-12
1181 7-10
1182 7-10
1183 7-10
1184 7-10
1185 7-10
1186 7-10
1187 7-10
1188 7-10
1189 7-10
1190 7-10
1191 7-12
1192 7-12
1193 7-12
1194 7-12
1195 7-12
1196 7-12
1197 7-12
1198 7-12
1199 7-12
1199A 7-12
1200TZ 13-21
1201TZ 13-21
1202TZ 13-21
1203 5-2
1204 5-2
1206 7-4
1207 7-4
1208 7-4
1208A 7-4
1208B 7-4
1209 13-22
1210 13-22
1211 7-5
1212 7-5
1213 7-5
1214 7-5
1215 7-5
1216 7-5
1217 7-5
1218 7-5
1219 7-5
1220 7-5
1221 ..... 7-14, 11-41, 11-38
1222 ..... 7-14, 11-41, 11-38
1223 ..... 7-14, 11-41, 11-38
1224 ..... 7-14, 11-41, 11-38
1224TITZ 12-39
1225TZ 7-14, 11-41, 11-38
1226 ..... 7-14, 11-41, 11-38
1226TITZ 12-39
1227 ..... 7-14, 11-41, 11-38
1228 ..... 7-14, 11-41, 11-38
1229 ..... 7-14, 11-41, 11-38
1230TZ 7-14, 11-41, 11-38
1231 ..... 7-14, 11-41, 11-38
1232 ..... 7-14, 11-41, 11-38
1233 ..... 7-14, 11-41, 11-38
1234 ..... 7-14, 11-41, 11-38
1235 ..... 7-14, 11-41, 11-38
1236 ..... 7-15, 10-159
1237 ..... 7-15, 10-159
1238 ..... 7-15, 10-159
1239 7-14
1241TZ 7-7
1242 7-7
1243 7-7
1244 7-7
1245TZ 7-7
1246TZ 7-7
1247 7-7
1248 7-7
1249 7-7

INDEX

1250 7-7
1250A 7-7
1250B 7-7
1251 7-7
1252 7-7
1253 7-7
1254 7-7
1255 7-7
1256 7-7
1257 7-7
1258 7-7
1259 7-7
1260 7-7
1260A 7-7
1260B 7-7
1261 7-8
1262 7-8
1263 7-8
1264 7-8
1265 7-8
1266 7-8
1267 7-8
1268 7-8
1269 7-8
1270 7-8
1270A 7-8
1270B 7-8
1281 11-36
1282 11-36
1283 11-36
1284 11-36
1285 11-39
1286 11-39
1287 11-39
1288 11-36
1289 11-36
1290 11-36
1291 11-39
1292 11-39
1293 11-39
1294 11-37
1295 11-37
1296 11-37
1297 11-40
1298 11-40
1299 11-40
1301 11-37
1302 11-37
1303 11-37
1304 11-40
1305 11-40
1306 11-40
1307 11-38
1308 11-38
1309 11-38
1310 11-38
1311 11-38
1312 11-38
1313 11-34
1314 11-34
1315 11-33
1316 11-33
1317 11-32
1318 11-32
1319 11-32
1320 11-32
1321 11-32
1323 11-32
1324 11-35
1325 11-35
1326 11-33
1327 7-21
1328 7-21
1328P 7-21
1329 7-21
1329P 7-21
1331 7-17
1332 7-17
1333 7-17
1334 7-17
1335 7-17
1336 7-17
1337 7-17
1338 7-17
1339 7-17
1340 7-17
1341 7-17
1342 7-17
1343 7-17
1344 7-17
1345 7-17
1346 7-17
1347 7-18
1348 7-18
1349 7-18
1350 7-18
1351 7-18
1352 7-18
1353 7-18
1354 7-18
1355 7-18
1356 7-18
1357 7-18
1358 7-18
1359 7-18
1360 7-18
1361 7-18
1362 7-18
1364 7-21
1371 7-16
1372 7-16
1373 7-16
1374 7-16
1375 7-16
1376 7-16
1377 7-23
1378 7-23
1379 7-23
1380 7-23
1381 7-23
1382 7-23
1383 7-23
1384 7-23
1385 7-23
1386 7-23
1387 7-23
1388 7-23
1389 7-23
1390 7-23
1391 7-23
1392 7-23
1393 7-23
1394 7-23
1395 7-23
1396 7-23
1397 7-23
1398 7-23
1399 7-23
1400 7-23
1402 7-23
1403 7-23
1404 7-23
1405 7-23
1406 7-23
1407 7-23
1408 7-23
1409 7-23
1410 7-23
1411 7-23
1412 7-23
1413 7-23
1414 7-23
1415 7-23
1416 7-23
1417 7-23
1418 7-23
1419 7-23
1420 7-23
1421 7-23
1422 7-23
1423 7-23
1424 7-23
1425 7-23
1426 7-23
1427 7-23
1428 7-23
1429 7-23
1430 7-23
1431 7-23
1432 7-23
1433 7-23
1434 7-23
1435 7-23
1436 7-23
1437 7-23
1438 7-23
1439 7-23
1440 7-23
1441 7-23
1442 7-23

1443 7-23
1444 7-23
1445 7-23
1446 7-23
1447 7-23
1448 7-23
1449 7-24
1450 7-24
1451 7-24
1452 7-24
1453 7-24
1454 7-24
1455 7-24
1456 7-24
1457 7-24
1458 7-24
1459 7-24
1460 7-24
1461 7-24
1462 7-24
1463 7-24
1464 7-24
1465 7-24
1466 7-24
1467 7-24
1468 7-24
1469 7-24
1470 7-24
1471 7-24
1472 7-24
1473 7-24
1474 7-24
1475 7-24
1476 7-24
1477 7-24
1478 7-24
1480 7-15
1481 7-15
1482 7-15
1483 7-15
1484 7-15
1485 7-15
1486 7-16
1487 7-16
1488 7-16
1490 7-16
1491 7-19
1492 7-19
1493 7-19
1494 7-19
1495 7-19
1496 7-19
1501 2-17
1502 2-17
1511 7-20
1512 7-20
1513 7-20
1521 2-17
1522 2-17
1551HDG 12-55
1552HDG 12-55
1553HDG 12-55
1554HDG 12-55
1555HDG 12-55
1556HDG 12-55
1557HDG 12-55
1558HDG 12-55
1559AHDG 12-55
1559HDG 12-55
1561HDG 12-54
1562HDG 12-54
1563HDG 12-54
1564HDG 12-54
1565HDG 12-54
1566HDG 12-54
1567HDG 12-54
1568HDG 12-54
1569HDG 12-54
1570HDG 12-54
1571HDG 12-54
1572HDG 12-54
1573HDG 12-54
1574HDG 12-54
1575HDG 12-54
1576HDG 12-54
1577HDG 12-54
1578HDG 12-54
1591 13-23
1592 13-23
1593 13-23
1594 13-23
1595 13-23
1596 13-23
1597 13-23
1598 13-23
1611 7-20
1612 7-20
1613 7-20
1621 7-22
1621R 7-22
1622 7-22
1622R 7-22
1623 7-22
1623R 7-22
1624R 7-22
1625R 7-22
1626R 7-22
1637 7-19
1661 1-19
1662 1-19
1663 1-19
1664 1-19
1665 1-19
1666 1-19
1667 1-19
1668 1-19
1669 1-19
1670 1-19
1750 5-9
1751 5-9
1752 5-9
1753 5-9
1754 5-9
1755 5-9
1756 5-9
1757 5-9
1758 5-9
1759 5-9
1810 13-12
1818 13-12
1900 5-7
1966 5-15
1977TZ 5-15
2101 12-15
2102 12-15
2103 12-15
2104 12-15
2105 12-15
2106 12-15
2107 12-15
2108 12-15
2109 12-15
2110 12-15
2111 12-75
2112 12-75
2113 12-75
2514 7-20
2515 7-20
2516 7-20
2807TZ 13-13
2808TZ 13-13
2809 13-13
2817TZ 13-13
2818 13-13
2819 13-13
2901 13-15
2901A 13-15
2902 13-15
2902A 13-15
2903 13-15
2903A 13-15
2903B 13-15
2905 13-15
2905A 13-15
2906 13-15
2907 13-15
2907A 13-15
2908 13-15
2909 13-15
2909A 13-15
2909B 13-15
2910 13-15
2910A 13-15
2911 13-15
2911A 13-15
2912 13-15
2921 13-16
2922 13-16
2923 13-16
2925 13-16

INDEX

2925A....13-16
2926....13-16
2927....13-16
2927A....13-16
2928....13-16
2929....13-16
2929A....13-16
2929B....13-16
2930....13-16
2931....13-16
2932....13-16
2933....13-16
2934....13-16
3001....13-17
3002....13-17
3003....13-17
3005....13-17
3005A....13-17
3006....13-17
3007....13-17
3008....13-17
3008A....13-17
3009....13-17
3009A....13-17
3009B....13-17
3010A....13-17
3010TZ....13-17
3011A....13-17
3011TZ....13-17
3012TZ....13-17
3101TZ....13-14
3102....13-14
3103....13-14
3105TZ....13-14
3106....13-14
3107....13-14
3108....13-14
3109....13-14
3109A....13-14
3109B....13-14
3110A....13-14
3110TZ....13-14
3111A....13-14
3111TZ....13-14
3112....13-14
3201TZ....13-18
3202TZ....13-18
3203....13-18
3205TZ....13-18
3206....13-18
3207....13-18
3208....13-18
3209....13-18
3209A....13-18
3209B....13-18
3210....13-18
3210A....13-18
3211....13-18
3211A....13-18
3212....13-18
3301....13-14
3302....13-14
3303....13-14
3305....13-14
3305A....13-14
3306....13-14
3307....13-14
3308....13-14
3309....13-14
3309A....13-14
3310....13-14
3310A....13-14
3311....13-14
3311A....13-14
3312....13-14
3838ASTSW....3-2
4040ASTSW....3-2
4300....3-27
4300C100....3-27
4300R....3-27
4301R....3-27
4301TZ....3-27
4302R....3-27
4302TZ....3-27
4303R....3-27
4303TZ....3-27
4304R....3-27
4304TZ....3-27
4305R....3-27
4305TZ....3-27
4306R....3-27
4306TZ....3-27
4307....3-27
4308....3-27
4309TZ....3-27
4310TZ....3-27
5158....10-44
5175....10-44
5200....3-23, 3-24
5200C100UL....3-25
5200R....3-24
5200RUL....3-26
5200UL....3-25
5201....3-23, 3-24
5201R....3-24
5201R500UL....3-26
5201RL....3-24
5201RUL....3-26
5201UL....3-25
5202....3-23, 3-24
5202R....3-24
5202R500....3-24
5202R500UL....3-26
5202RUL....3-26
5202UL....3-25
5203....3-23
5203C50....3-23, 3-24
5203R....3-24
5203R300....3-24
5203RUL....3-26
5203UL....3-25
5204....3-23, 3-24
5204R....3-24
5204R400....3-24
5204RUL....3-26
5204UL....3-25
5205....3-23
5205C25....3-23, 3-24
5205R....3-24
5205RUL....3-26
5205UL....3-25
5206....3-23, 3-24
5206R....3-24
5206RUL....3-26
5206UL....3-25
5207....3-23, 3-24
5207UL....3-25
5208....3-23, 3-24
5208UL....3-25
5209....3-23, 3-24
5209UL....3-25
5210....3-23, 3-24
5210UL....3-25
5250....3-23, 3-24
5258....10-45
5275....10-45
6100....2-21,
6100R....2-21,
6100RUL....2-20
6100UL....2-20
6101....2-21,
6101R....2-21,
6101RUL....2-20
6101UL....2-20
6102....2-21,
6102R....2-21,
6102RUL....2-20
6102UL....2-20
6103....2-21,
6103R....2-21,
6103RUL....2-20
6103UL....2-20
6104....2-21,
6104R....2-21,
6104RUL....2-20
6104UL....2-20
6105....2-21,
6105R....2-21,
6105R150....2-21,
6105RUL....2-20
6105UL....2-20
6106....2-21,
6106C50....2-21,
6106R....2-21,
6106RUL....2-20
6106UL....2-20
6107....2-21,
6107UL....2-20
6108....2-21,
6108UL....2-20

INDEX

6109 2-21,
6109UL 2-20
6110 2-21,
6110UL 2-20
6150-3/4 10-47
6150-BLNK 10-47
6150-EXT 10-50
6150-S 10-47
6250-1 10-48
6250-1-1/4 10-48
6250-3/4 10-48
6250-BLNK 10-48
6250-S 10-48
6350-1 10-49
6350-1-1/2 10-49
6350-1-1/4 10-49
6350-3/4 10-49
6350-BLNK 10-49
6350-EXT 10-50
6350-S 10-49
6410TZ 9-9
6415 9-6
6422 9-6
6430 9-5
6451 9-8
6452 9-8
6453 9-8
6454 9-8
6455 9-8
6456 9-8
6457 9-9
6458 9-9
6459 9-9
6515 9-6
6522 9-6
6530 9-5
6615 9-6
6622 9-6
6624 9-7
6630 9-5
6636 9-7
6648TZ 9-7
6715 9-6
6722 9-6
6724 9-7
6730 9-5
6736 9-7
6815 9-6
6822 9-6
6824 9-7
6830 9-5
6836 9-7
6848 9-7
6915 9-6
6922 9-6
6924 9-7
6930 9-5
7015 9-6
7022 9-6
7024 9-7
7030TZ 9-5
7036 9-7
7048 9-7
7060 9-7
8415 9-3
8422 9-2
8430 9-2
8515 9-3
8522 9-2
8530 9-2
8615 9-3
8622 9-2
8624 9-3
8630 9-2
8636 9-3
8715 9-3
8722 9-2
8730 9-2
8815 9-3
8822 9-2
8830 9-2
8836 9-3
8915 9-3
8922 9-2
8930 9-2
9663 5-7
9674 5-7
9685 5-7
9696 5-7
9707 5-7
16812MTZ 12-9
24151-1/2 10-62
24151-R 10-62
46111 10-58
46111-OW 10-58
46111-R 10-58
46112 10-75
47111 10-58
51100 10-44
51125 10-44
51150 10-44
52100 10-45
52125 10-45
52141-1/2 10-1
52150 10-45
52151-1/2 10-2
52151-1/2DR 10-1
52151-3/4 10-2
52151-3/4DR 10-1
52151-3/4F 10-3
52151-3/4RED 10-130
52151-3/4-VT 10-121
52151-AB 10-3
52151-B 10-3
52151-BBX 10-4
52151-BLNK 10-1
52151-BLNKSS 10-1
52151-BX 10-4
52151-DWS 10-3
52151-F 10-3
52151-FBX 10-4
52151-FBXPT 10-4
52151-FR 10-4
52151-FS 10-3
52151-MS 10-3
52151-MSBX 10-4
52151-MSR 10-4
52151-OW 10-2
52151-R 10-4
52151-RED 10-130
52151-S 10-2
52151-SDR 10-1
52151-SDRPT 10-1
52151-SPT 10-2
52151-SVT 10-121
52151-SVTRED 10-130
52151-SVTSS 10-121
52151-SWB 10-3
52151-WB 10-3
52171-1 10-6
52171-1/2 10-6
52171-1/2-3/4 10-5
52171-1/2DR 10-5
52171-1DR 10-5
52171-1RED 10-131
52171-1-VT 10-122
52171-3/4 10-6
52171-3/4-1 10-6
52171-3/4-1VT 10-122
52171-3/4DR 10-5
52171-3/4RED 10-131
52171-3/4-VT 10-122
52171-AB 10-7
52171-BBX 10-8
52171-BLNK 10-5
52171-BLNKSS 10-5
52171-BX 10-5
52171-BXPT 10-5
52171-F 10-7
52171-FBX 10-8
52171-FBXPT 10-8
52171-FR 10-8
52171-FRED 10-131
52171-FS 10-7
52171-KOR 10-6
52171-MS 10-7
52171-MSBX 10-8
52171-MSR 10-8
52171-OW 10-6
52171-OWRED 10-131
52171-R 10-5
52171-RED 10-131
52171-S 10-6
52171-SBB 10-122
52171-SDR 10-5
52171-SPT 10-6
52171-SVT 10-122
52171-SVTRED 10-122, 10-131
52171-SVTSS 10-122
52171-SWB 10-7

INDEX

52171-WB 10-7
52181-1 10-9
52181-1/2-SPKR 10-120
52181-1-SPKR 10-120
52181-3/4 10-9
52181-3/4-1 10-9
52181-3/4-SPKR 10-120
52181-3/4-SPKRR 10-120
52181-AB 10-10
52181-BLNK 10-9
52181-FRED 10-132
52181-FS 10-10
52181-OW 10-9
52181-OWRED 10-132
52181-RED 10-132
52181-S 10-9
52181-SPKR 10-120
52181-SPKRR 10-120
52181-SVT 10-123
52181-VTBAR 12-129, 10-9
52191-1 10-11
52191-3/4 10-11
52191-BLNK 10-11
52191-FRED 10-133
52191-OW 10-11
52191-OWRED 10-133
52191-RED 10-133
52191-S 10-11
52200 10-45
53141-1/2 10-11
53151-1/2 10-12
53151-1/2SPL 10-13
53151-3/4 10-12
53151-BLNK 10-12
53151-RED 10-134
53151-S 10-12
53151-SSPL 10-13
53151-SUB 10-12
53151-SVT 10-123
53151-SVTSS 10-123
53171-1 10-14
53171-3/4 10-14
53171-A45 10-14
53171-BLNK 10-14
53171-RED 10-134
53171-S 10-14
53171-SSPL 10-13
53171-SUB 10-14
53171-SVT 10-124
53171-SVTSS 10-124
54151-1/2 10-63
54151-3/4 10-63
54151-BLNK 10-63
54151-BX 10-64
54151-CFBH 10-77
54151-CFBH-BULK 10-77
54151-CFNB 10-76
54151-CFNB-BULK 10-76
54151-CFOW 10-77
54151-DE 10-63
54151-DEOW 10-63
54151-ES 10-63
54151-F 10-64
54151-FBX 10-65
54151-FR 10-65
54151-HU 10-73
54151-HUBX 10-73
54151-HUR 10-73
54151-J 10-64
54151-JBX 10-65
54151-JR 10-65
54151-OW 10-63
54151-OWBX 10-64
54151-OWR 10-64
54151-R 10-64
54151-RED 10-138
54151-S 10-63
54151-SGS 10-63
54151-SVTSS 10-129
54151-VT 10-129
54171-1/2 10-66
54171-1/2BB 10-66
54171-3/4 10-66
54171-BLNK 10-66
54171-BLNKSS 10-66
54171-BX 10-67
54171-CFNB 10-76
54171-CFOW 10-77
54171-DE 10-66
54171-DEOW 10-66
54171-F 10-68
54171-FBX 10-68
54171-FR 10-68
54171-JBR 10-68
54171-JBX 10-68
54171-OPR 10-69
54171-OW 10-66
54171-OWBX 10-67
54171-R 10-67
54171-RED 10-138
54171-S 10-66
54171-SVTSS 10-66
54171-TBAR 10-67, 10-78
54171-TBFN 10-78
54181-BLNK 10-69
54181-OW 10-69
54181-S 10-69
54181-TBAR 10-70
55151-1/2 10-70
55151-3/4 10-70
55151-RED 10-139
55151-S 10-70
55151-VT 10-129
55171-RED 10-139
55171-S 10-71
56111 10-59
56111-OW 10-59
56111-R 10-59
56112-CF 10-75
56112-CF-BULK 10-75
56113 10-59
57111 10-60
64104 9-9
64105 9-9
64106 9-9
64108 9-9
64512 9-8
64513 9-8
64514 9-8
64515 9-8
64516 9-8
64518 9-8
64522 9-8
64523 9-8
64524 9-8
64525 9-8
64526 9-8
64528 9-8
64532 9-8
64533 9-8
64534 9-8
64535 9-8
64536 9-8
64538 9-8
64542 9-8
64543 9-8
64544 9-8
64545 9-8
64546 9-8
64548 9-8
64552 9-8
64553 9-8
64554 9-8
64555 9-8
64556 9-8
64558 9-8
64563 9-8
64564 9-8
64565 9-8
64566 9-8
64567 9-8
64568 9-8
64573 9-9
64574 9-9
64575 9-9
64576 9-9
64578 9-9
64583 9-9
64584 9-9
64585 9-9
64586 9-9
64588 9-9
64594 9-9
64595 9-9
64596 9-9
64598 9-9
72151-3/4 10-27
72151-S 10-27
72151-SVT 10-125
72171-1 10-28

72171-1-1/4 10-28
72171-1-1/4VT 10-126
72171-1-1/4W 10-29
72171-1/2 10-28
72171-1/2-3/4E 10-28
72171-1/2W 10-29
72171-1RED 10-135
72171-1-VT 10-126
72171-1W 10-29
72171-3/4 10-28
72171-3/4-1 10-28
72171-3/4-1-VT 10-126
72171-3/4-1W 10-29
72171-3/4RED 10-135
72171-3/4-VT 10-126
72171-3/4W 10-29
72171-BLNK 10-28
72171-BLNKSS 10-28
72171-BLNKW 10-29
72171-BXW 10-30
72171-FBXW 10-31
72171-FSW 10-30
72171-MSBXW 10-31
72171-MSW 10-30
72171-RED 10-135
72171-S 10-28
72171-SVT 10-126
72171-SVTRED 10-126, 10-135
72171-SVTSS 10-126
72171-SW 10-29
72171-SWPT 10-29
72181-1 10-31
72181-1-1/2 10-31
72181-1-1/4 10-31
72181-3/4 10-31
72181-BLNK 10-31
72181-DTA 10-32
72181-DTAB 10-32
72181-DTARED 10-136
72181-S 10-31
73151-S 10-32
73151-SSPL 10-13
73151-SW 10-32
73171-1 10-33
73171-1-1/4W 10-33
73171-1/2 10-33
73171-1W 10-33
73171-3/4 10-33
73171-3/4W 10-33
73171-BLNK 10-33
73171-BLNKW 10-33
73171-RED 10-137
73171-S 10-33
73171-SSPL 10-13
73171-SUB 10-33
73171-SVT 10-127
73171-SW 10-33
73181-BLNK 10-34
73181-SW 10-34
82171-RD 10-136
82171-WH 10-136
104180 7-25
104280 7-25
104380 7-25
104480 7-25
104580 7-25
104680 7-25
104780 7-25
104880 7-25
105080 7-25
105180 7-25
105280 7-25
105380 7-25
105480 7-25
105580 7-25
105680 7-25
105780 7-25
105880 7-25
106080 7-25
123812MTZ 12-41
141480 7-26
141580 7-26
143980 7-26
145980 7-26
146080 7-26
146780 7-26
146880 7-26
147380 7-26
350812MTZ 12-90
641010 9-9
641012 9-9
645110 9-8
645112 9-8
645210 9-8
645212 9-8
645310 9-8
645312 9-8
645410 9-8
645412 9-8
645510 9-8
645512 9-8
645610 9-8
645612 9-8
645710 9-9
645712 9-9
645810 9-9
645812 9-9
645910 9-9
645912 9-9
3000037EGTZ 12-51
3000037PLTZ 12-51
3000050EGTZ 12-51
3000062EGTZ 12-51
3000075EGTZ 12-51
3100037EGTZ 12-51
3100050EGTZ 12-51
6451112 9-8
6451212 9-8
6451312 9-8
6452112 9-8
6452212 9-8
6452312 9-8
6453212 9-8
6453312 9-8
6454212 9-8
6454312 9-8
6455212 9-8
6455312 9-8
6456212 9-8
6456312 9-8
6457312 9-9
6458312 9-9
6517554 13-11
55189302 2-16
55189407 2-16
55311201 2-16
55311401 2-16
64736540 2-16
65176140 13-6
65176240 13-6
65177140 13-24
65177240 13-24
65177740 13-6
65180940 13-24
65183240 13-6
65254740 13-10

A

AB375TZ 12-65
ABS 10-142
ABTZ 12-65
AF14TZ 12-46
AF144TITZ 12-39
AF146TITZ 12-39
AF146TTZ 12-39
AMC1 3-1
AMC2 3-1
AMC12 3-1
AMR-00 10-61
AMR0 10-19
AMR1 10-19
AMR-1-LV 10-55
AMR2 10-22
AMR-2-LV 10-55
AMR3 10-109
AMR4 10-109
AMR011B 10-35
AMR-52C4 ..... 10-24, 10-38
AMR-72C4 10-38
AMR111B 10-35
AMR158 10-19
AMR211B 10-37
AR812TZ 12-91
ASB-5 3-28
ASB-6 3-28
ASB-7 3-28
ASB-8 3-28
ATA4ITZ 12-123
ATS4ITZ 12-123

B

BA-1/4-SS....12-65
BA-3/8-SS....12-65
BAKC38....12-9
BB-1-1....10-145
BB-1/2-1....10-145
BB-1/2-2....10-145
BB-3/4-1....10-145
BB4-26....12-87
BB6-26....12-87
BC8PTZ....12-41
BC12PTZ....12-41
BC16MSMTZ....12-43
BC16MTZ....12-42
BC20MSMTZ....12-43
BC20MTZ....12-42
BC24MSMTZ....12-43
BC24MTZ....12-42
BC32MSMTZ....12-43
BC32MTZ....12-42
BC200TZ....12-48
BC400TZ....12-48
BC812MSMTZ....12-43
BC812MTZ....12-42
BC-1024....12-48
BC-1420-SS....12-48
BC-1420-XWM....12-46
BC-3816-SS....12-48
BCTZ....12-48
BEX-450....10-14
BEX-475....10-14
BEX-4100....10-14
BF075SQD....14-2
BF100U....14-2
BH3....12-127
BHA1....10-74, 12-26
BHA1C....10-74
BHAD16....12-85
BHAD24....12-85
BHC....10-74, 12-128
BHT1....12-126
BHT1A....12-127
BHT481A....12-127
BHTC....12-128
BMB1U....12-87
BMB3U....12-85
BMB16SL....12-86
BMB616SL....12-86
BP-1935....10-16
BP-1936....10-16
BP19350....10-103
BPO-1935....10-16
BPO-1936....10-16
BPO-19350....10-103
BR-100-WS....12-110
BR-125-SS....12-111
BR-150....12-111
BR-150NP....12-113
BR-150-SS....12-111
BR-150-SSC....12-114
BR-150-SSCWH....12-114
BR-150-TW....12-114
BR-150-WH....12-112
BR-150-WHWS....12-112
BR-150-WS....12-110
BR-200NP....12-113
BR-200-SS....12-111
BR-200-SSC....12-114
BR-200-SSCWH....12-114
BR-200-TW....12-114
BR-200-WH....12-112
BR-200-WHWS....12-112
BR-400NP....12-113
BR-400-SS....12-111
BR-400-SSC....12-114
BR-400-TW....12-114
BR-400-WH....12-112
BR-501024....12-111
BR-1001024....12-111
BR-1501024....12-111
BRC-50ST....8-22
BRC-75ST....8-22
BRC-100ST....8-22
BRM75BK....12-115
BRM75WH....12-115
BRM100BK....12-115
BRM100WH....12-115
BRM125BK....12-115
BRM125WH....12-115
BRM150-HD....12-115
BRM200-HD....12-115
BRM400-HD....12-115
BRS150....12-113
BRS200....12-113

C

C1CG....6-4
C1G7....6-31
C1M....6-25
C1MHDG....6-25
C1SS....6-11
C1SSCG....6-14
C1TZ....6-1
C2CG....6-4
C2G7....6-31
C2M....6-25
C2MHDG....6-25
C2SS....6-11
C2SSCG....6-14
C2TZ....6-1
C3CG....6-4
C3G7....6-31
C3M....6-25
C3MHDG....6-25
C3SS....6-11
C3SSCG....6-14
C3TZ....6-1
C4CG....6-4
C4G7....6-31
C4M....6-25
C4MHDG....6-25
C4SS....6-11
C4SSCG....6-14
C4TZ....6-1
C5CG....6-4
C5G7....6-31
C5M....6-25
C5MHDG....6-25
C5SS....6-11
C5SSCG....6-14
C5TZ....6-1
C6CG....6-4
C6G7....6-31
C6M....6-25
C6MHDG....6-25
C6RTZ....6-1
C6SS....6-11
C6SSCG....6-14
C6TZ....12-87
C7....6-1
C7CG....6-4
C7G7....6-31
C7M....6-25
C7MHDG....6-25
C8....6-1
C8CG....6-4
C8G7....6-31
C8M....6-25
C8MHDG....6-25
C9....6-1
C9CG....6-4
C9M....6-25
C9MHDG....6-25
C10....6-1
C10CG....6-4
C10M....6-25
C10MHDG....6-25
C23TZ....12-87
C3452....10-16
C3453....10-16
C3454....10-16
CAPE50....1-6
CAPE75....1-6
CAPE100....1-6
CAPE125....1-6
CAPE150....1-6
CAPE200....1-6
CAPE250....1-6
CAPE300....1-6
CAPE350....1-6
CAPE400....1-6
CAPR50....8-6
CAPR75....8-6
CAPR100....8-6
CAPR125....8-6
CAPR150....8-6
CAPR200....8-6
CAT12BCTZ....12-102

CAT12TZ 12-101
CAT21BCTZ 12-102
CAT21CD1BTZ 12-106
CAT21TZ 12-101
CAT32BCTZ 12-102
CAT32TZ 12-101
CAT64TZ 12-101
CAT124Z34TZ 12-104
CAT126Z34TZ 12-104
CAT150 12-108
CAT150-AB 12-108
CAT150-MAG 12-108
CAT150-WM 12-107
CAT150-WMAG 12-107
CAT200 12-108
CAT200-AB 12-108
CAT200-MAG 12-108
CAT200-WM 12-107
CAT200-WMAG 12-107
CAT324Z34TZ 12-104
CAT326Z34TZ 12-104
CAT400 12-108
CAT400-AB 12-108
CAT400-WM 12-107
CAT400-WMAG 12-107, 12-108
CAT3224TZ 12-103
CB-1250 10-114
CB-1350 10-114
CB-2250 10-114
CB-2350 10-114
CB-3250 10-114
CB-3350 10-114
CBC-275 10-79
CBC-350 10-79
CBC-600 10-81
CBC-800 10-81
CBC-1200 10-81
CBC-275800 10-79
CBC-350800 10-79
CBC-F 10-79
CBCU 10-79
CBD-800 10-80
CBD-1200 10-80
CBP 10-118
CBP-3/8 10-118
CBP-AP 10-118
CBP-APO 10-118
CBP-B 10-118
CBP-VT 10-118
CBS 12-128
CBS-800 10-80
CBS-1200 10-80
CD0BTZ 12-10
CD1BTZ 12-10
CD2.5BTZ 12-10
CD2BTZ 12-10
CD4BTZ 12-10
CD5BTZ 12-10
CD6BTZ 12-10
CD7BTZ 12-10
CD8BTZ 12-10
CD9BTZ 12-10
CHBC-50 12-47
CHBC-75 12-47
CHBC-100 12-47
CHBC-100-TM 12-41
CHBC-125 12-47
CHBC-150 12-47
CHBC-175 12-47
CHBC-200 12-47
CHN50-SS 8-18
CHN75-SS 8-18
CHN100-SS 8-18
CHN125-SS 8-18
CHN150-SS 8-18
CHN200-SS 8-18
CHN250-SS 8-18
CHN300-SS 8-18
CHN350-SS 8-18
CHN400-SS 8-18
CHP-50-SM 12-42
CHP-75-SM 12-42
CHP-100-SM 12-42
CHQ-50 12-11
CHQ-75 12-11
CHSS-50 12-12
CHSS-75 12-12
CHSS-100 12-12
CHSS-125 12-12
CHSS-150 12-12
CHSS-175 12-12
CHSS-200 12-12
CHSS-250 12-12
CHSS-300 12-12
CHSS-350 12-12
CHSS-400 12-12
CJ6STZ 12-91
CJIN 12-91
CLBU 12-31
CLC-800 10-81
CNN-025 12-77
CNN-038 12-77
CPMH1 10-83
CS16TZ 12-92
CS812DTZ 12-92
CS812TZ 12-92
CSLP-50 1-3
CSLP-75 1-3
CSLP-100 1-3
CSLP-125 1-3
CSLP-150 1-3
CSLP-200 1-3
CSLP-250 1-3
CSLP-300 1-3
CSLP-350 1-3
CSLP-400 1-3
CTB-24 12-129
CTB-24LK 12-129
CTB-244S 12-129

D

DCB 12-129
DEX-150 10-17
DEX-175 10-17
DEX-250 10-17
DEX-275 10-17
DH6TITZ 12-38
DJSK 10-96
DJSKWH 10-96
DLC 10-94
DPB-2 10-57
DPB-2F 10-57
DPB-20W 10-57
DPBOSDUP 10-57
DPBOSGFI 10-57
DRS-1-1/2 12-118
DRS-1-1/4 12-118
DRS-1/2 12-118
DRS-5/8 12-118
DRS-7/8 12-118
DRV-1-1/2 12-118
DRV-1-1/4 12-118
DRV-1/2 12-118
DRV-5/8 12-118
DRV-7/8 12-118
DS1TZ 1-18, 12-92
DS2 ..... 1-18, 12-92
DS3 ..... 1-18, 12-92
DSI2ATZ 12-84
DST-200 12-115
DST-200-P 12-117
DST-300 12-115
DST-300-P 12-117
DST-500 12-115
DST-500-P 12-117
DST-800 12-115
DST-1200 12-115

E

E5075 8-39
E75100 8-39
E100125 8-39
E125150 8-39
EC 10-149
EC1 6-6
EC1CG 6-9
EC2 6-6
EC2CG 6-9
EC3 6-6
EC3CG 6-9
EC4 6-6
EC4CG 6-9
EC5 6-6
EC5CG 6-9
EC6 6-6
EC6CG 6-9
EC7 6-6
EC7CG 6-9

INDEX

EC8 6-6
EC8CG 6-9
EC9 6-6
EC9CG 6-9
EC10 6-6
EC10CG 6-9
EF50 8-50
EF75 8-50
EF100 8-50
EF125 8-50
EFL50 8-50
EFL75 8-50
EFL100 8-50
EFL125 8-50
ELB1 6-6
ELB1CG 6-8
ELB2 6-6
ELB2CG 6-8
ELB3 6-6
ELB3CG 6-8
ELB4 6-6
ELB4CG 6-8
ELB5 6-6
ELB5CG 6-8
ELB6 6-6
ELB6CG 6-8
ELB7 6-6
ELB7CG 6-8
ELB8 6-6
ELB8CG 6-8
ELB9 6-6
ELB9CG 6-8
ELB10 6-6
ELB10CG 6-8
ELL1 6-7
ELL1CG 6-9
ELL2 6-7
ELL2CG 6-9
ELL3 6-7
ELL3CG 6-9
ELL4 6-7
ELL4CG 6-9
ELL5 6-7
ELL5CG 6-9
ELL6 6-7
ELL6CG 6-9
ELL7 6-7
ELL7CG 6-9
ELL8 6-7
ELL8CG 6-9
ELL9 6-7
ELL9CG 6-9
ELL10 6-7
ELL10CG 6-9
ELR1 6-7
ELR1CG 6-10
ELR2 6-7
ELR2CG 6-10
ELR3 6-7
ELR3CG 6-10
ELR4 6-7
ELR4CG 6-10
ELR5 6-7
ELR5CG 6-10
ELR6 6-7
ELR6CG 6-10
ELR7 6-7
ELR7CG 6-10
ELR8 6-7
ELR8CG 6-10
ELR9 6-7
ELR9CG 6-10
ELR10 6-7
ELR10CG 6-10
EPS0075EGTZ 12-29
EPS0100EGTZ 12-29
EPS0125EGTZ 12-29
EPS0150EGTZ 12-29
EPS0200EGTZ 12-29
ESG1MTZ 12-62
ESG1TZ 12-62
ET1 6-8
ET1CG 6-10
ET2 6-8
ET2CG 6-10
ET3 6-8
ET3CG 6-10
ET4 6-8
ET4CG 6-10
ET5 6-8
ET5CG 6-10
ET6 6-8
ET6CG 6-10
ET7 6-8
ET7CG 6-10
ET8 6-8
ET8CG 6-10
ET9 6-8
ET9CG 6-10
ET10 6-8
ET10CG 6-10
EXR-1 10-26
EXR-1-1/2 10-26
EXR-1-1/4 10-26
EXR-1/2 10-26
EXR-2 10-26
EXR-3/4 10-26
EXR-5/8 10-26
EXR-F 10-26
EZLB200 ..... 6-34, 7-13

F

F130000EGTZ 12-78
F140000EGTZ 12-78
F150000EGTZ 12-78
FB 5-12
FB812MTZ 12-9
FBCVBR-1TR-KIT 10-157
FBCVBR-3D-KIT 10-158
FBCVBR-TRWR-KIT 10-158
FBCVGRBK 10-158
FBCVSS-1TR-KIT 10-157
FBCVSS-3D-KIT 10-158
FBCVSS-TRWR-KIT 10-158
FBF-BR 10-159
FBF-SS 10-159
FD1MHDG 8-44
FD2MHDG 8-44
FD3MHDG 8-44
FDC1MHDG 8-45
FDC2MHDG 8-45
FDC3MHDG 8-45
FDC21MHDG 8-44
FDC22MHDG 8-44
FDC23MHDG 8-44
FF250 8-48
FF300 8-48
FF400 8-48
FF500 8-48
FF600 8-48
FFCP-50 1-19
FFCP-75 1-19
FFCP-100 1-19
FFE50 8-48
FFE75 8-48
FIXTURE 10-82
FMBS18TZ 12-83
FS1MHDG 8-44
FS2MHDG 8-44
FS3MHDG 8-44
FSBCMHDG 8-46
FSBCSHDG 8-45
FSC1MHDG 8-45
FSC2MHDG 8-45
FSC3MHDG 8-45
FSC21MHDG 8-44
FSC22MHDG 8-44
FSC23MHDG 8-44
FSCLK10 10-141
FSDRMHDG 8-46
FSDRSHDG 8-45
FSFDCG 8-46
FSFOM 10-141
FSGFISHDG 8-45
FSGSMHDG 8-46
FSGSSHDG 8-45
FSPAD 10-141
FXC20TZ 12-93

G

G500 10-84
G500-BX 10-84
G500-OWBX 10-84
G500-R 10-84
G600 10-85
G600-BX 10-85
G600-OW 10-85
G600-R 10-85

G601 10-86
G601-3/4 10-86
G601-BBX 10-88
G601BVR 10-86
G601BVROW 10-86
G601-BX 10-87
G601-F 10-88
G601-FBX 10-88
G601-FR 10-88
G601-OW 10-86
G601-OWBX 10-87
G601-OWR 10-87
G601-R 10-87
G602 10-89
G602-3/4 10-89
G602-BX 10-89
G602-F 10-90
G602-FBX 10-90
G602-FR 10-90
G602-OW 10-89
G602-R 10-89
G603 10-90
G603-3/4 10-90
G603-BX 10-91
G603-F 10-91
G603-FBX 10-91
G603-FR 10-91
G603-OW 10-90
G603-R 10-91
G1929 10-16
G1929-SS 10-16
G1930 10-16
G1932 10-16
G1933 10-16
G1935 10-16
G1935-SS 10-16
G1936 10-16
G1937 10-16
G1938 10-16
G1938-SS 10-16
G1939 10-16
G1939-SS 10-16
G1940 10-16
G1941 10-16
G1942 10-16
G1943 10-16
G1943-U 10-16
G1944 10-16
G1947 10-16
G1947-SS 10-16
G1947-U 10-16
G1948 10-16
G1949 10-16
G1950 10-16
G1950-SS 10-16
G1950-U 10-16
G1951 10-16
G1952 10-16
G1953 10-16
G19180 10-97
G19180-BLN 10-97
G19190 10-97
G19279 10-98
G19280 10-98
G19280-E 10-102
G19280-S 10-98
G19281 10-99
G19281-1/2-3/4 10-99
G19281-1/2-3/4GS 10-99
G19281-3/4 10-99
G19281-3/4GS 10-99
G19281-AB 10-100
G19281-BLNKSS 10-99
G19281-E 10-102
G19281-F 10-100
G19281NGH 10-99
G19281-S 10-99
G19281-S-3/4 10-99
G19281-SS 10-99
G19282 10-100
G19282-1/2-3/4 10-100
G19282-3/4 10-100
G19282-AB 10-101
G19282-BLNK 10-100
G19282-BLNKSS 10-100
G19282-F 10-101
G19282NGH 10-100
G19282-SS 10-100
G19290 10-103
G19290-SS 10-103
G19320 10-103
G19350 10-103
G19380 10-103
G19390 10-103
G19420 10-103
G19430 10-103
G19470 10-103
G19530 10-103
G20281 10-104
G20290 10-104
G20320 10-104
G20350 10-104
G20380 10-104
G20430 10-104
G20470 10-104
GB-1582 10-105
GB-1583 10-105
GB-1584 10-105
GB-1585 10-105
GB-1586 10-105
GB-1587 10-105
GB-1588 10-105
GB-2122 10-105
GB-2123 10-105
GB-2124 10-105
GB-2125 10-105
GB-2126 10-105
GB-2127 10-105
GB-2128 10-105
GB-2129 10-105
GB-2122341 10-105
GB-2123341 10-105
GB-2124341 10-105
GB-2125341 10-105
GB-2126341 10-105
GB-2127341 10-105
GB-2128341 10-105
GB-2129341 10-105
GBBC-2 10-111
GBBC-3 10-111
GBBC-4 10-111
GBBC-5 10-111
GBBC-6 10-111
GBBC-7 10-111
GBBC-8 10-111
GBBC-9 10-111
GBD-350 10-95
GBDC-122 10-108
GBDC-123 10-108
GBDC-124 10-108
GBDC-125 10-108
GBDC-126 10-108
GBDC-127 10-108
GBDC-128 10-108
GBDC-129 10-108
GBDC-342 10-108
GBDC-343 10-108
GBDC-344 10-108
GBDC-345 10-108
GBDC-346 10-108
GBDC-347 10-108
GBDC-348 10-108
GBDC-349 10-108
GBDUP-2 10-111
GBDUP-3 10-111
GBDUP-4 10-111
GBDUP-5 10-111
GBDUP-6 10-111
GBDUP-7 10-111
GBDUP-8 10-111
GBEX-1582 10-107
GBEX-1583 10-107
GBEX-1584 10-107
GBEX-1585 10-107
GBEX-1586 10-107
GBEX-1587 10-107
GBEX-1588 10-107
GBEX-2122 10-107
GBEX-2123 10-107
GBEX-2124 10-107
GBEX-2125 10-107
GBEX-2126 10-107
GBEX-2127 10-107
GBEX-2129 10-107
GBGFI-2 10-111
GBGFI-3 10-111
GBGFI-4 10-111
GBGFI-5 10-111
GBGFI-6 10-111
GBGFI-7 10-111

INDEX

GBGFI-8 10-111
GBGFI-9 10-111
GBP-158-F 10-109
GBP-212-F 10-109
GBP-15812 10-109
GBP-15834 10-109
GBP-21212 10-109
GBP-21234 10-109
GBSD-3150 10-110
GBSD-3175 10-110
GBSD-3250 10-110
GBSD-3275 10-110
GBSD-4150 10-110
GBSD-4175 10-110
GBSD-4250 10-110
GBSD-4275 10-110
GBSD-4350 10-110
GBSD-4375 10-110
GBTC-2 10-111
GBTC-3 10-111
GBTC-4 10-111
GBTC-5 10-111
GBTC-6 10-111
GBTC-8 10-111
GBTC-9 10-111
GC ..... , 10-142
GCA250400 13-1
GCA450600 13-1
GCH5010050 13-6
GCH5010075 13-6
GCH5010100 13-6
GR8C 13-5
GS ..... , 10-142
GSST ..... , 10-142

H

H50 13-5
H75 13-5
H100 13-5
H125 13-5
HC50 8-22
HC75 8-22
HC100 8-22
HF11 2-18
HF11R 2-18
HF12 2-18
HF21 2-19
HF22 2-19
HF112 2-18
HF112R 2-18
HF134 2-18
HF134R 2-18
HF138 2-18
HF212 2-19
HF214 2-19
HF234 2-19
HF238 2-19
HF1112 2-18
HF1114 2-18
HF2112 2-19
HF2114 2-19

I

IBS-50 1-19
IBS-75 1-19
IBTS-50 8-26
IBTS-75 8-26
IBTS-100 8-26
IDSTZ 12-132

J

JCL50 12-55
JCL75 12-55
JCL100 12-55
JCL125 12-55
JCL150 12-55
JCL250 12-55
JCL350300 12-55
JFC-1213 12-52
JFC-1420 12-52
JFC-3816 12-52
JFC-5811 12-52
JFCS-3816 12-16
JFCS-3816SS 12-16
JHK-12-AB 12-105
JHK-12ABMAG 12-105
JHK-12-H0 12-103
JHK-12-H0516 12-103
JHK-12-H0916 12-103
JHK-12MAG 12-104
JHK-12SS 12-101
JHK-21-AB 12-105
JHK-21ABMAG 12-105
JHK-21-BC 12-102
JHK-21-BW2 12-104
JHK-21-BW6 12-104
JHK-21-H0 12-103
JHK-21-H0516 12-103
JHK-21-H0916 12-103
JHK-21MAG 12-104
JHK-21SS 12-101
JHK-32-AB 12-105
JHK-32ABMAG 12-105
JHK-32-BC 12-102
JHK-32-H0516 12-103
JHK-32-H0916 12-103
JHK-32MAG 12-104
JHK-32SS 12-101
JHK-64-AB 12-105
JHK-64ABMAG 12-105
JHK-64-BC 12-102
JHK-64-BW2 12-104
JHK-64-H0 12-103
JHK-64-H0516 12-103
JHK-64-H0916 12-103
JHK-64MAG 12-104
JHK-64SS 12-101
JHK-84 12-101
JHK-84MAG 12-104
JHT-212 12-106
JHT-214 12-106
JHT-216 12-106
JHT-322 12-106
JHT-324 12-106
JHT-326 12-106
JHT-642 12-106
JHT-644 12-106
JHT-646 12-106

K

K8TZ 12-22
K12TZ 12-22
K16TZ 12-22
K20TZ 12-22
KBTTZ 12-120
KO50 10-151
KO51 10-151
KO52 10-151
KO53 10-151
KO54 10-151
KO55 10-151
KOS-50 10-150
KOS-50-OT 10-152
KOS-50-OTSS 10-152
KOS-50-VT 10-151
KOS-75 10-150
KOS-75-OT 10-152
KOS-75-OTSS 10-152
KOS-75-VT 10-151
KOS-100 10-150
KOS-100-OT 10-152
KOS-100-OTSS 10-152
KOS-100-VT 10-151
KOS-125 10-150
KOS-125-OT 10-152
KOS-125-OTSS 10-152
KOS-125-VT 10-151
KOS-150 10-150
KOS-150-OT 10-152
KOS-150-OTSS 10-152
KOS-150-VT 10-151
KOS-200 10-150
KOS-200-OT 10-152
KOS-200-OTSS 10-152
KOS-200-VT 10-151
KOS-250 10-150
KOS-250-OT 10-152
KOS-250-OTSS 10-152
KOS-250-VT 10-151
KOS-300 10-150
KOS-300-OT 10-152
KOS-300-OTSS 10-152
KOS-300-VT 10-151
KOS-350 10-150
KOS-350-OT 10-152
KOS-350-OTSS 10-152

KOS-350-VT....10-151
KOS-400....10-150
KOS-400-OT....10-152
KOS-400-OTSS....10-152
KOS-400-VT....10-151
KOS-500....10-150
KOS-500-VT....10-151
KOS-600....10-150
KOS-600-VT....10-151
KXTZ....12-22

L

L-104....4-2
L-160-B....13-3
L220000EGTZ....12-66
LB1....6-1
LB1CG....6-3
LB1G7....6-30
LB1M....6-24
LB1MHDG....6-24
LB1SS....6-11
LB1SSCG....6-13
LB2....6-1
LB2CG....6-3
LB2G7....6-30
LB2M....6-24
LB2MHDG....6-24
LB2SS....6-11
LB2SSCG....6-13
LB3....6-1
LB3CG....6-3
LB3G7....6-30
LB3M....6-24
LB3MHDG....6-24
LB3SS....6-11
LB3SSCG....6-13
LB4....6-1
LB4CG....6-3
LB4G7....6-30
LB4M....6-24
LB4MHDG....6-24
LB4SS....6-11
LB4SSCG....6-13
LB5....6-1
LB5CG....6-3
LB5G7....6-30
LB5M....6-24
LB5MHDG....6-24
LB5SS....6-11
LB5SSCG....6-13
LB6....6-1
LB6CG....6-3
LB6G7....6-30
LB6M....6-24
LB6MHDG....6-24
LB6SS....6-11
LB6SSCG....6-13
LB7....6-1
LB7CG....6-3
LB7G7....6-30
LB7M....6-24
LB7MHDG....6-24
LB8....6-1
LB8CG....6-3
LB8G7....6-30
LB8M....6-24
LB8MHDG....6-24
LB9....6-1
LB9CG....6-3
LB9G7....6-30
LB9M....6-24
LB9MHDG....6-24
LB10....6-1
LB10CG....6-3
LB10G7....6-30
LB10M....6-24
LB10MHDG....6-24
LFS-16WHT....10-82
LFS-375-12WH....10-82
LFS-375-18WH....10-82
LFS-375-24WH....10-82
LFS-375-36WH....10-82
LFS-375-48WH....10-82
LFS-375-60WH....10-82
LFS-375-NUT....10-82
LL1....6-2
LL1CG....6-4
LL1G7....6-31
LL1M....6-26
LL1MHDG....6-26
LL1SS....6-12
LL1SSCG....6-14
LL2....6-2
LL2CG....6-4
LL2G7....6-31
LL2M....6-26
LL2MHDG....6-26
LL2SS....6-12
LL2SSCG....6-14
LL3....6-2
LL3CG....6-4
LL3G7....6-31
LL3M....6-26
LL3MHDG....6-26
LL3SS....6-12
LL3SSCG....6-14
LL4....6-2
LL4CG....6-4
LL4G7....6-31
LL4M....6-26
LL4MHDG....6-26
LL4SS....6-12
LL4SSCG....6-14
LL5....6-2
LL5CG....6-4
LL5G7....6-31
LL5M....6-26
LL5MHDG....6-26
LL5SS....6-12
LL5SSCG....6-14
LL6....6-2
LL6CG....6-4
LL6G7....6-31
LL6M....6-26
LL6MHDG....6-26
LL6SS....6-12
LL6SSCG....6-14
LL7....6-2
LL7CG....6-4
LL7G7....6-31
LL7M....6-26
LL7MHDG....6-26
LL8....6-2
LL8CG....6-4
LL8G7....6-31
LL8M....6-26
LL8MHDG....6-26
LL9....6-2
LL9CG....6-4
LL9M....6-26
LL9MHDG....6-26
LL10....6-2
LL10CG....6-4
LL10G7....6-31
LL10M....6-26
LL10MHDG....6-26
LNSS-50....8-40
LNSS-75....8-40
LNSS-100....8-40
LNSS-125....8-40
LNSS-150....8-40
LNSS-200....8-40
LQA-1250-I....2-1
LQA-1300-I....2-1
LQA-1350-I....2-1
LQA-1400-I....2-1
LR1....6-2
LR1CG....6-5
LR1G7....6-32
LR1M....6-27
LR1MHDG....6-27
LR1SS....6-12
LR1SSCG....6-15
LR2....6-2
LR2CG....6-5
LR2G7....6-32
LR2M....6-27
LR2MHDG....6-27
LR2SS....6-12
LR2SSCG....6-15
LR3....6-2
LR3CG....6-5
LR3G7....6-32
LR3M....6-27
LR3MHDG....6-27
LR3SS....6-12
LR3SSCG....6-15
LR4....6-2
LR4CG....6-5

LR4G7 6-32
LR4M 6-27
LR4MHDG 6-27
LR4SS 6-12
LR4SSCG 6-15
LR5 6-2
LR5CG 6-5
LR5G7 6-32
LR5M 6-27
LR5MHDG 6-27
LR5SS 6-12
LR5SSCG 6-15
LR6 6-2
LR6CG 6-5
LR6G7 6-32
LR6M 6-27
LR6MHDG 6-27
LR6SS 6-12
LR6SSCG 6-15
LR7 6-2
LR7CG 6-5
LR7G7 6-32
LR7M 6-27
LR7MHDG 6-27
LR8 6-2
LR8CG 6-5
LR8G7 6-32
LR8M 6-27
LR8MHDG 6-27
LR9 6-2
LR9CG 6-5
LR9M 6-27
LR9MHDG 6-27
LR10 6-2
LR10CG 6-5
LR10G7 6-32
LR10M 6-27
LR10MHDG 6-27
LTCSS-38 2-3
LTCSS-50 2-3
LTCSS-75 2-3
LTCSS-100 2-3
LTCSS-125 2-3
LTCSS-150 2-3
LTCSS-200 2-3
LTCSS-5090 2-10
LTCSS-7590 2-10
LTCSS-10090 2-10
LTCSS-12590 2-10
LTCSS-15090 2-10
LTCSS-20090 2-10
LTF1 4-11
LTF12 4-11
LTF34 4-11
LVP1 10-56
LVP1NP 10-56
LVP1SH 10-56
LVP2NP 10-56
LVP3NP 10-56
LVP41 10-23
LVP41D 10-23
LVP42 10-23
LVP42D 10-23
LVP51 10-37
LVP52 10-37

M

M1GHIU-G 11-24
M1GVIU-B 11-24
M1GVIU-G 11-24
M1GVIU-W 11-24
M2GIU-G 11-26
M2GIU-W 11-26
M24STZ 12-43
M24TZ 12-44
M58STZ 12-43
M58TZ 12-44
M912STZ 12-43
M912TZ 12-44
MAC2TZ 12-93
MAN200L 10-145
MAN200S 10-145
MBC3T 10-115
MBC-1024 12-50
MBC-1213 12-49
MBC-1213WM 12-50
MBC-1213XL 12-50
MBC-1420 12-49
MBC-1420-SS 12-47
MBC-1420WM 12-50
MBC-3816 12-49
MBC-3816EV 12-49
MBC-3816-SS 12-47
MBC-3816WM 12-50
MC3CGHDG 6-20
MC4CGHDG 6-20
MC5CGHDG 6-20
MC6CGHDG 6-20
MC7CGHDG 6-20
MC8CGHDG 6-20
MC9CGHDG 6-20
MC10CGHDG 6-20
MCC-1213 12-53
MCC-1213BK 12-53
MCC-3410 12-53
MCC-3410BK 12-53
MCC-3816 12-53
MCC-3816BK 12-53
MCC-5811 12-53
MCS100TZ 12-94
MDSK1G 10-157
MDSK2G 10-157
MDSK3G 10-157
MDSK4G 10-157
MDSKRC 10-157
ME14 5-7
ME-3202 4-2
MEIBB 13-9
MFC-1213 12-51
MFC-3410 12-51
MFC-3816 12-51
MFC-5811 12-51
MGSB-2 10-93
MGSB-2F 10-94
MGSB-20W 10-93
MGSB-3 10-93
MGSB-3F 10-94
MGSB-30W 10-93
MGSB-4 10-93
MGSB-4F 10-94
MGSB-40W 10-93
MLB3CGHDG 6-19
MLB4CGHDG 6-19
MLB5CGHDG 6-19
MLB6CGHDG 6-19
MLB7CGHDG 6-19
MLB8CGHDG 6-19
MLB9CGHDG 6-19
MLB10CGHDG 6-19
MLBCG4 6-18
MLBCG5 6-18
MLBCG6 6-18
MLL3CGHDG 6-21
MLL4CGHDG 6-21
MLL5CGHDG 6-21
MLL6CGHDG 6-21
MLR3CGHDG 6-22
MLR4CGHDG 6-22
MLR5CGHDG 6-22
MLR6CGHDG 6-22
MNG5B 10-147
MNG100 10-147
MSB1G 10-153
MSB2G 10-153
MSB3G 10-153
MSB4G 10-153
MSB22+ 10-153
MSBFAN 10-155
MSBHZ 10-153
MSBLV1G 10-55, 10-155
MSBLV2 10-55
MSBLV2G 10-155
MSBMMT1G 10-156
MSBMMT2G 10-156
MSBMMT3G 10-156
MSBMMT4G 10-156
MSBMMT5G 10-156
MSBMMT6G 10-156
MSBMMW 10-156
MSBRND 10-155
MSBST250 10-154
MSBTRAC1 10-154
MSFTZ 12-83
MSR58TZ 12-45
MSR122TZ 12-40
MSS24TZ 12-45
MSS58TZ 12-45
MSS122TZ 12-40
MSS912TZ 12-45

INDEX

MT3CGHDG....6-23
MT4CGHDG....6-23
MT5CGHDG....6-23
MT6CGHDG....6-23
MT7CGHDG....6-23
MT8CGHDG....6-23
MT9CGHDG....6-23
MT10CGHDG....6-23
MWT1....12-62

N

N-75700....9-8
N-100700....9-8
N-150700....9-8
N-250700....9-9
N-400700....9-9
NC25....4-6

O

OCA35075....10-119
OCA40050....10-119
OCA40075....10-119
OCR-200....10-117
OCR-250....10-117
OCR-300....10-117
OCR-350....10-117
OCR-400....10-117
OCR-400FAN....10-117
OCR-500....10-117
OCR-600....10-117
OCR-300341....10-117
OCR-350341....10-117
OCR-400341....10-117
ODR-250....12-117
ODR-350....12-117
ODR-375....12-117
OHSR-38M.... 8-53, 12-30
OHSS-38....12-30
OHSS-50....12-30
OHSS-75....12-30
OHSS-100....12-30
OHSS-125....12-30
OHSS-150....12-30
OHSS-200....12-30
OHSS-250....12-30
OHSS-300....12-30
OHSS-350....12-30
OHSS-400....12-30
OHSSR-25....12-28
OHSSR-38....12-28
OHSSR-50....12-28
OHSSR-75....12-28
OHSSR-100....12-28
OHSSR-125....12-28
OHSSR-150....12-28
OPCC-50....12-16
OPCC-75....12-16
OPCC-100....12-16
OWC....10-96
OWE....10-96

P

P1GFC-C....11-11
P1GFC-G....11-11
P1GFC-W....11-11
P2GFC-C....11-12
P2GFC-G....11-12
P2GFC-W....11-12
P-16....5-10
P-19....5-10
P-20....5-10
P-339....5-6
P-340....5-6
P-342....5-6
P-344....5-6
P470....2-14
P470B....2-14
P471....2-14
P471B....2-14
P472....2-14
P472B....2-14
P473....2-14
P473B....2-14
P474....2-14
P474B....2-14
P475....2-14
P475B....2-14
P476....2-14
P476B....2-14
P490....2-15
P490B....2-15
P491....2-15
P491B....2-15
P492....2-15
P492B....2-15
P493....2-15
P493B....2-15
P494....2-15
P494B....2-15
P495....2-15
P495B....2-15
P496....2-15
P496B....2-15
PBTS16....12-94
PCS1TZ....12-19
PCS2TZ....12-19
PLG50....8-49
PLG75....8-49
PLG100....8-49
PLG125....8-49
PLG150....8-49
PLG200....8-49
PLG250....8-49
PLG300....8-49
PLG350....8-49
PLG400....8-49
PLG500....8-49
PLG600....8-49
PN 50A...., 10-143
PTSO12BK...., 10-144
PTSO12BU....10-144
PTSO12GN-S...., 10-143
PTSO12RD...., 10-144
PTSO12WH...., 10-144
PTSO12YE....10-144
PTSO14BK...., 10-144
PTSO14BU....10-144
PTSO14RD....10-144
PTSO14WH....10-144
PTSO14YE....10-144
PTST12BK...., 10-144
PTST12BU....10-144
PTST12GN...., 10-143
PTST12GN-NGS...., 10-143
PTST12RD...., 10-144
PTST12WH...., 10-144
PTST12YE....10-144
PTST14BK...., 10-144
PTST14BU....10-144
PTST14GN...., 10-143
PTST14RD....10-144
PTST14WH....10-144
PTST14YE....10-144

R

R014T....12-57
R038T....12-57
RB1....8-36
RB2....8-36
RB3....8-36
RB4....8-36
RB5....8-36
RB6....8-36
RB7....8-36
RB8....8-36
RB9....8-36
RB10....8-36
RB11....8-36
RB12....8-36
RB13....8-36
RB14....8-36
RB15....8-36
RB16....8-36
RB17....8-38
RB19....8-38
RB20....8-38
RB21....8-38
RB22....8-38
RB23....8-38
RB24....8-38
RB25....8-38
RB26....8-38
RB27....8-38
RB28....8-38
RB29....8-38
RB30....8-38

INDEX

RB31....8-38
RB32....8-38
RB-5038-SS....8-37
RB-7550-SS....8-37
RB-10050-SS....8-37
RB-10075-SS....8-37
RB-12550-SS....8-37
RB-12575-SS....8-37
RB-15050-SS....8-37
RB-15075-SS....8-37
RB-20050-SS....8-37
RB-20075-SS....8-37
RB-25050-SS....8-37
RB-25075-SS....8-37
RB-125100-SS....8-37
RB-150100-SS....8-37
RB-150125-SS....8-37
RB-200100-SS....8-37
RB-200125-SS....8-37
RB-200150-SS....8-37
RB-250100-SS....8-37
RB-250125-SS....8-37
RB-250150-SS....8-37
RB-250200-SS....8-37
RB-300100....8-36
RB-300100-SS....8-37
RB-300125....8-36
RB-300125-SS....8-37
RB-300150....8-36
RB-300150-SS....8-37
RB-300200....8-36
RB-300200-SS....8-37
RB-300250....8-36
RB-300250-SS....8-37
RB-350200....8-36
RB-350200-SS....8-37
RB-350250....8-36
RB-350250-SS....8-37
RB-350300-SS....8-37
RB-400200....8-36
RB-400200-SS....8-37
RB-400250....8-36
RB-400250-SS....8-37
RB-400300....8-36
RB-400300-SS....8-37
RB-400350-SS....8-37
RB-500400....8-36
RB-500400-SS....8-37
RB-600500....8-36
RB-600500-SS....8-37
RBS16TZ....12-84
RBS24TZ....12-84
RC-50SS....9-10
RC-75SS....9-10
RC-100SS....9-10
RC-125SS....9-10
RC-150SS....9-10
RC-200SS....9-10
RC-250SS....9-10
RC-300SS....9-10
RC-350SS....9-10
RCR50....4-5
RCR75....4-5
RMX58TZ....12-1
RXCN38....4-2

S

SB2.531....4-14
SB3.039....4-14
SB87510....4-14
SB87511....4-14
SB109313....4-14
SB109314....4-14
SB109315....4-14
SB137514....4-14
SB137516....4-14
SB175022....4-14
SB200026....4-14
SBEX....10-96
SC2DTZ....12-1
SC2FTZ....12-1
SC4DTZ....12-1
SC4ETZ....12-1
SC-50....10-27
SC-50R....10-62, 10-69
SC-50R-VT....10-128
SC-50R-VTSS....10-128
SC-50-VTSS....10-125
SC-75....10-27
SC-75R....10-62, 10-69
SC-5075HF....10-27
SC-5075HFR....10-62, 10-69
SC-507511B....10-41
SC-507511BHF....10-41
SC-507511B-VTSS....10-128
SCC-1213....12-52
SCC-1213BK....12-52
SCC-1213SS....12-52
SCC-3410....12-52
SCC-3410BK....12-52
SCC-3410SS....12-52
SCC-3816BK....12-52
SCC-3816SS....12-52
SCC-5811....12-52
SCC-5811BK....12-52
SCC-5811SS....12-52
SCE-50....12-14
SCE-75....12-14
SCE-100....12-14
SCE-125....12-14
SCE-150....12-14
SCE-200....12-14
SCH6BTZ....12-17
SCH8BTZ....12-17
SCH8TZ....12-17
SCH12BTZ....12-17
SCH12TZ....12-17
SCH16BTZ....12-17
SCH16TZ....12-17
SCH20BTZ....12-17
SCH20TZ....12-17
SCH24BTZ....12-17
SCH32BTZ....12-17
SCH40BTZ....12-17
SCH48BTZ....12-17
SCH56BTZ....12-17
SCH64BTZ....12-17
SCH72BTZ....12-17
SDP....5-12
SFBC40....12-71
SFBC60....12-70
SFBC61....12-70
SFBC70....12-71
SFBR40-6....12-69
SFBR40-9....12-69
SFBR40-12....12-69
SFEC08....12-63
SFEC09....12-63
SFEF33-158....12-68
SFEF33-1316....12-68
SFF20....12-80
SFF21....12-80
SFF22....12-80
SFF23....12-80
SFF24....12-80
SFF30....12-63
SFF31....12-63
SFF32....12-63
SFF34....12-63
SFF50....12-63
SFF50-GN....12-63
SFF51....12-64
SFF51-GN....12-64
SFF60....12-64
SFF60-GN....12-64
SFL11....12-64
SFL11-GN....12-64
SFL11-SS....12-64
SFL13....12-67
SFL13-GN....12-67
SFL20....12-65
SFL21....12-66
SFL30....12-67
SFL31-SS....12-66
SFL60....12-67
SFL60-GN....12-67
SFL62....12-68
SFP10....12-69
SFP13....12-69
SFP14....12-69
SFP14-GN....12-69
SFSW12-1213....12-72
SFSW12-3816....12-72
SFSW13-1213....12-72
SFSW13-3816....12-72
SFU32....12-68
SFU32-GN....12-68
SFU33....12-68
SFU33-GN....12-68

INDEX

SFU70-25....12-78
SFU70-38....12-78
SFU70-50....12-78
SGB16ATZ....12-85
SICN/25....1-4
SICN-50....1-4
SICN-50I....1-4
SICN-75....1-4
SICN-75I....1-4
SICN-125I....1-4
SICN-150....1-4
SICN-150I....1-4
SICN-200....1-4
SICN-200I....1-4
SICN-250....1-4
SICN-250I....1-4
SICN-300....1-4
SICN-300I....1-4
SICN-350....1-4
SICN-350I....1-4
SICN400....1-4
SICN-400I....1-4
SICN-I00I....1-4
SICP-125....1-4
SICP-200....1-4
SICP400....1-4
SICP450....1-4
SICP-50....1-4
SICP.75....1-4
SICP-250....1-4
SICP-300....1-4
SICP-I00....1-4
SICP-ISO....1-4
SK85ITZ....12-14
SK125ITZ....12-14
SK165ITZ....12-14
SK205ITZ....12-14
SK245ITZ....12-14
SK325ITZ....12-14
SK405ITZ....12-14
SK485ITZ....12-14
SK565ITZ....12-14
SK645ITZ....12-14
SLN-3816....12-73
SLR-1-EV....10-54
SLR-2-EV....10-54
SLR-150....10-54
SLR-158....10-54
SLR-250....10-54
SLR-258....10-54
SLR-275....10-54
SMS8TZ....12-75
SMY141C....12-73
SMY141S....12-73
SMY142W....12-73
SMY381C....12-73
SMY381S....12-73
SMY382W....12-73
SN25TZ....12-74
SN37TZ....12-74
SN50TZ....12-74
SNCN1213....12-77
SNCN1420....12-77
SNCN3816....12-77
SNLS1213....12-75
SNLS1420....12-75
SNLS3816....12-75
SNSQ1213....12-77
SNSQ1420....12-77
SNSQ3816....12-77
SNSS1213....12-75
SNSS1420....12-75
SNSS3816....12-75
SNWO1213....12-77
SOB-1....5-12
SP-3.... 12-98, 10-146
SP-3-MS....10-147
SP-6....12-98
SP-6-MS....10-147
SP-9....10-147
SP-12....10-147
SP-18....10-147
SP-24....10-147
SP-33....10-148
SP-36....10-148
SP-39....10-148
SP-58....10-148
SP-312....10-148
SP-318....10-148
SP-324....10-148
SP-512....10-148
SP-518....10-148
SP-524....10-148
SPRA0025EGTZ....12-76
SPRA0037EGTZ....12-76
SPRA0050EGTZ....12-76
SPRC0025EGTZ....12-76
SQZ-38I....3-16
SQZ-3845I....3-18
SQZ-5045I....3-18
SQZ-7545I....3-18
SSLP-50SW....1-7
SSLP-75SW....1-7
SSLP-100SW....1-7
SSLP-125SW....1-7
SSLP-150SW....1-7
SSLP-200SW....1-7
SSLP-250SW....1-7
SSLP-300SW....1-7
SSLP-350SW....1-7
SSLP-400SW....1-7
STF14....12-58
STF14NP....12-59
STF0030....12-58
STF0036....12-58
STF1430....12-59
STF1436....12-59
STR50-SS....12-15
STR75-SS....12-15
STR100-SS....12-15
STR125-SS....12-15
STR150-SS....12-15
STR200-SS....12-15
STR250-SS....12-15
STR300-SS....12-15
STR350-SS....12-15
STR400-SS....12-15
STR500....12-15
STR500-SS....12-15
STR600....12-15
STR600-SS....12-15
SW0-WBA....12-11
SW0-WBAS....12-12
SW-1/2....12-79
SW-1/2-G....12-79
SW-1/2-SS....12-79
SW-1/4....12-79
SW-1/4-G....12-79
SW-1/4-SS....12-79
SW-2-1/2....12-79
SW-2-3/4....12-79
SW-2-3/8....12-79
SW-2-5/8....12-79
SW-3/4....12-79
SW-3/8....12-79
SW-3/8-G....12-79
SW-3/8-SS....12-79
SW-5/8....12-79
SW-5/8-G....12-79
SW-5/8-SS....12-79

T

T1....6-3
T1CG....6-5
T1G7....6-32
T1M....6-28
T1MHDG....6-28
T1SS....6-13
T1SSCG....6-15
T2....6-3
T2CG....6-5
T2G7....6-32
T2M....6-28
T2MHDG....6-28
T2SS....6-13
T2SSCG....6-15
T3....6-3
T3CG....6-5
T3G7....6-32
T3M....6-28
T3MHDG....6-28
T3SS....6-13
T3SSCG....6-15
T4....6-3
T4CG....6-5
T4G7....6-32
T4M....6-28
T4MHDG....6-28
T4SS....6-13

T4SSCG....6-15
T5....6-3
T5CG....6-5
T5G7....6-32
T5M....6-28
T5MHDG....6-28
T5SS....6-13
T5SSCG....6-15
T6....6-3
T6CG....6-5
T6G7....6-32
T6M....6-28
T6MHDG....6-28
T6SS....6-13
T6SSCG....6-15
T7....6-3
T7CG....6-5
T7G7....6-32
T7M....6-28
T7MHDG....6-28
T8....6-3
T8CG....6-5
T8G7....6-32
T8M....6-28
T8MHDG....6-28
T9....6-3
T9CG....6-5
T9M....6-28
T9MHDG....6-28
T10....6-3
T10CG....6-5
T10G7....6-32
T10M....6-28
T10MHDG....6-28
TA50...., 3-3
TA75...., 3-3
TA100...., 3-3
TA125...., 3-3
TA150...., 3-3
TA200...., 3-3
TB1M....6-29
TB1SSCG....6-16
TB2M....6-29
TB2SSCG....6-16
TB3M....6-29
TB3SSCG....6-16
TB4M....6-29
TB4SSCG....6-16
TB5M....6-29
TB5SSCG....6-16
TB6M....6-29
TB6SSCG....6-16
TB-125....10-113
TB-135....10-113
TB-225....10-113
TB-235....10-113
TB-325....10-113
TB-325-F....10-92
TB-335....10-113
TB-335-F....10-92
TB-425....10-113
TB-425-F....10-92
TB-435....10-113
TB-435-F....10-92
TB-525....10-113
TB-525-F....10-92
TB-535....10-113
TB-625....10-113
TB-635....10-113
TBD-250....10-115
TBD-350....10-115
TBX-125....10-116
TBX-135....10-116
TBX-225....10-116
TBX-235....10-116
TBX-325....10-116
TBX-335....10-116
TBX-425....10-116
TBX-435....10-116
TBX-525....10-116
TBX-535....10-116
THS-25....1-17, 12-33
THS-38....1-17, 12-33
THSS-38....12-33
THSS-50....12-33
THSS-75....12-33
THSS-100....12-33
THSS-125....12-33
THSS-150....12-33
THSS-200....12-33
THSS-250....12-33
THSS-300....12-33
THSS-350....12-33
THSS-400....12-33
THSSR-50....8-54, 12-34
THSSR-75....8-54, 12-34
THSSR-100....8-54, 12-34
THSSR-125....8-54, 12-34
THSSR-150....8-54, 12-34
THSSR-200....8-54, 12-34
THSSR-250....8-54, 12-34
THSSR-300....8-54, 12-34
THSSR-350....8-54, 12-34
THSSR-400....8-54, 12-34
TRH-1420....12-58
TRH-3816....12-58
TSGB16TZ....12-85
TSGB1624TZ....12-85
TSNT0025EGTZ....12-74
TSNT0037EGTZ....12-74
TSRBS1625TZ....12-86
TXJG14HDG....8-13
TXJG24HDG....8-13
TXJG34HDG....8-13
TXJG44HDG....8-13
TXJG54HDG....8-13
TXJG64HDG....8-13
TXJG74HDG....8-13
TXJG84HDG....8-13
TXJG94HDG....8-13
TXJG104HDG....8-13
TZ0....3-28

U

UB625....4-14
UB875....4-14
UB1000....4-14
UB1093....4-14
UBL1....14-1
UBL1-BLU....14-1
UBL1-RED....14-1
UBL1-UPC....14-1
UBL2....14-1
UBL2P....14-1
UBL3P....14-1

V

VF14TZ....12-45
VFI100W50....11-42
VFI100W50CG....11-42
VFI100W75....11-42
VFI100W75CG....11-42
VFI200W50CG....11-42
VFI200W75CG....11-42
VFIBOX50....11-42
VFIBOX75....11-42
VFICC....11-42
VFIGLS....11-42
VFP100W50CG....11-42
VFP100W75CG....11-42
VFW100W50CG....11-42
VFW100W75CG....11-42

W

W-10....12-133
W-11....12-133
W-13....12-133
WB1EXT....11-29
WB2EXT....11-30
WB200....12-116
WB1350....11-1
WB1350B....11-1
WB1350W....11-1
WB1375....11-1
WB1375B....11-1
WB1375W....11-1
WB1450....11-1
WB1450B....11-1
WB1450EXT....11-29
WB1450W....11-1
WB1475....11-1
WB1475EXT....11-29
WB1550....11-2
WB1550X....11-2
WB1575....11-2
WB1575X....11-2
WB1650EXT....11-30


INDEX

WB1675EXT....11-30
WB2350....11-4
WB2350B....11-4
WB2350W....11-4
WB2375....11-4
WB2375B....11-4
WB2375W....11-4
WB2450....11-4
WB2475....11-4
WB2550....11-5
WB2550X....11-6
WB2575....11-5
WB2575X....11-6
WB2650X....11-7
WB2675X....11-7
WB2750....11-5
WB2750X....11-7
WB2775....11-5
WB2775X....11-7
WB3750....11-8
WB3775....11-8
WB13100....11-1
WB15100X....11-2
WB23100....11-4
WB25100X....11-6
WB37100....11-8
WBF-1....10-53
WBF-2....10-53
WBF-4....10-53
WC1B....11-15
WC1BB....11-15
WC1BW....11-15
WC1V12....11-9
WC1V12B....11-9
WC1V12W....11-9
WC2B....11-20
WC2BB....11-20
WC2BW....11-20
WC3B....11-21
WC25GFI....11-17
WC2225....11-20
WC2225B....11-20
WC2225W....11-20
WC3325....11-21
WCH1DUP....11-10
WCH1DUPB....11-10
WCH1DUPW....11-10
WCH1GFI....11-13
WCH1GFIW....11-13
WCIU1D....11-23
WCR1150....11-9
WCR1150W....11-9
WCR1350....11-9
WCR1350B....11-9
WCR1350W....11-9
WCV1DUP....11-10
WCV1GFI....11-14
WCV1GFIW....11-14
WCV2DUP....11-16
WCV2DUPGFI....11-18
WCV2GFI....11-18
WCV2SDUP....11-16
WCV11....11-13
WCV11.625....11-15
WCV12.125....11-15
WCV2264....11-19
WCV21515....11-17
WCV22125....11-19
WDB1350....11-3
WDB1350B....11-3
WDB1350W....11-3
WDB1375....11-3
WDB1375B....11-3
WDB1375W....11-3
WDB1550X....11-3
WDB1575X....11-3
WDB2550....11-6
WDB2575....11-6
WDB13100....11-3
WDB15100X....11-3
WDS....12-117
WDSMS....12-117
WDSWS....12-117
WH50-SS....8-16
WH75-SS....8-16
WH100-SS....8-16
WH125-SS....8-16
WH150-SS....8-16
WH200-SS....8-16
WH250-SS....8-16
WH300-SS....8-16
WH350-SS....8-16
WH400-SS....8-16
WMX3TZ....12-23
WMX6TZ....12-23
WP50....11-31
WP50PL....11-31
WP50PLB....11-31
WP50PLW....11-31
WP75....11-31
WP75PL....11-31
WP100....11-31
WPAR50....11-31
WPAR50B....11-31
WPAR50W....11-31
WPBH50....11-31
WPP1....10-149
WPP2G....10-150
WPPU....10-149
WRB450EXT....11-28
WRB475EXT....11-28
WRB1550....11-28
WRB1550B....11-28
WRB1550W....11-28
WRB1575....11-28
WRB1575W....11-28
WRC150....11-27
WRC150B....11-27
WRC150W....11-27
WRC250....11-27
WRC250W....11-27
WRC350....11-27
WRC350B....11-27
WRC350W....11-27
WRCB....11-27
WSC1VHD....11-14
WSC22HD....11-19

X

X1M....6-29
X2M....6-29
X3M....6-29
X4M....6-29
X5M....6-29
X6M....6-29

INDEX

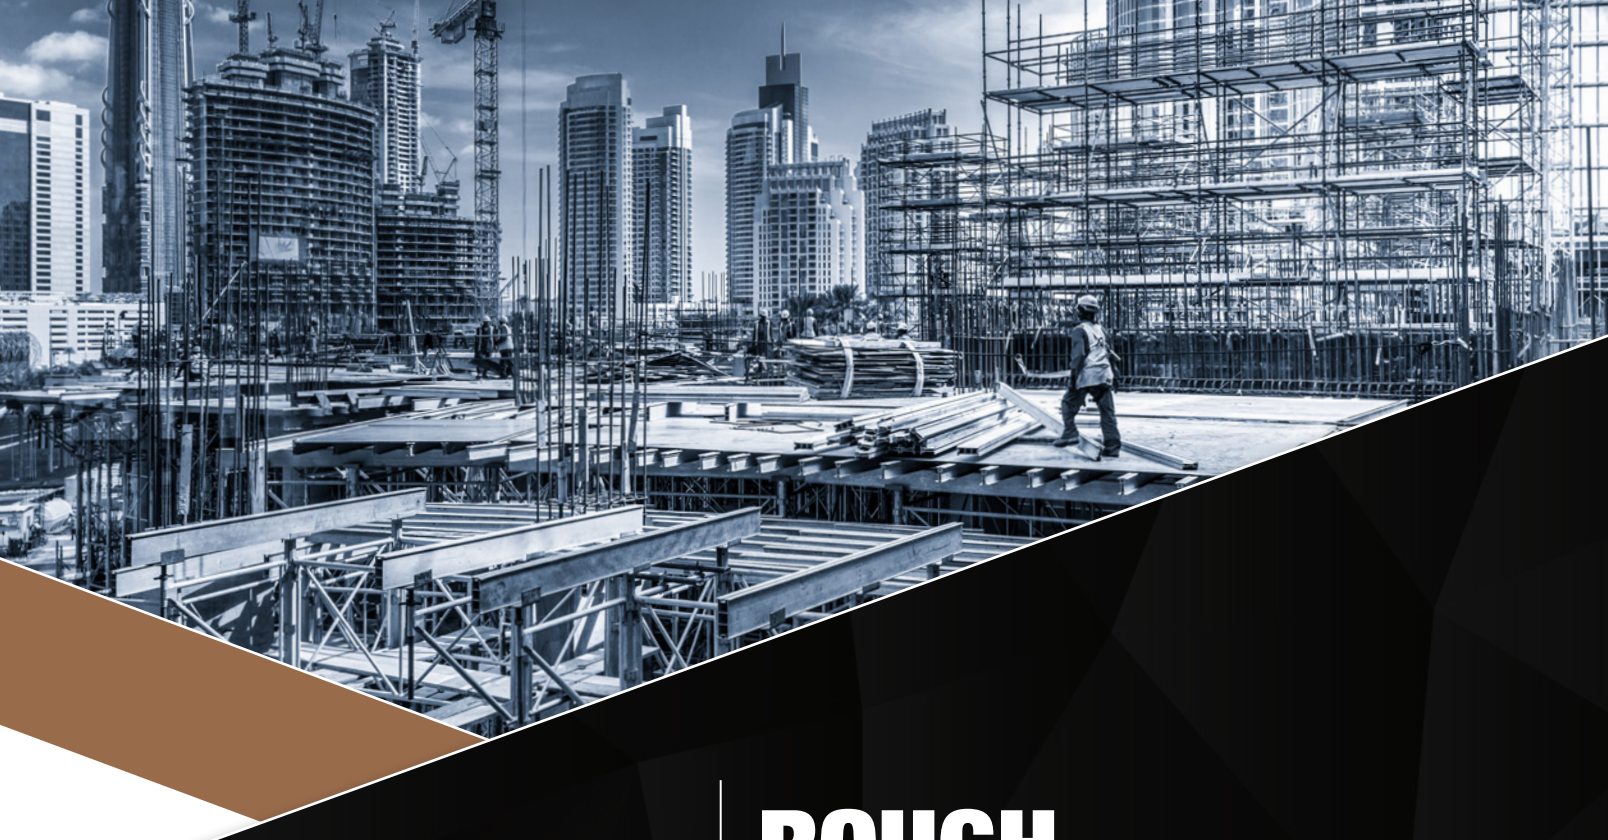

Southwire™

ROUGH ELECTRICAL COMPONENTS CATALOG

get social with us:

/SOUTHWIRETOOLS

@SOUTHWIRETOOLS

@SOUTHWIRETOOLS

SOUTHWIRETOOLS

SCAN TO LEARN MORE

WWW.SOUTHWIRE.COM | 1-855-SWTOOLS

All Trademarks or Registered Trademarks (TM/®) are owned or licensed by Southwire Company.
Any other ™/®- Trademark or Registered Trademark of Southwire Company.

Rev. 5, 01/26