



Southwire™

SERVICE ENTRANCE CATALOG



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

SOUTHWIRE.COM

SERVICE ENTRANCE FITTINGS

Southwire Service Entrance products provide easy access for installation of Electrical service or maintenance. Service entrance caps are available in threaded, PVC, clamp on with split insulator and set screw type to protect service entrance cables. Meter hubs, Duct Seal and flashings are also available to secure and protect conduit and ventilation pipes.

Aluminum Service Entrance Caps – Clamp on

Aluminum Service Entrance Caps – Threaded

PVC Service Entrance Caps

Roof Flashings

Meter Hubs

Sill Plates

Duct Seal

Porcelain Wire holders

Utility Pole Brackets

Watertight Compression Connectors



SE/SEU STRAPS

ONE HOLE - ALUMINUM



232A

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
232A	3 #3 OR #2	100	1000
282A	3 #1/0 OR #2/0	25	250
284A	3 #3/0 OR #4/0	20	100

FEATURES

- One hole
- Wide wire range
- Stamped aluminum

APPLICATIONS

- Use to secure SE & SEU service entrance cable in surface mount applications

STANDARD MATERIAL

- Aluminum

TWO HOLE - GALVANIZED STEEL



506

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
506	3#8, 6, 4	100	1000
507	3#3, 2	100	1000
508	3#1/0, 2/0	25	250
509	3#3/0, 4/0	25	250

FEATURES

- Inverted rib provides strength to keep cable secure
- Snap-on Rigid strap with two holes

APPLICATIONS

- Use to secure SE & SEU service entrance cable in surface mount applications

STANDARD MATERIAL

- Galvanized steel

ONE HOLE NM STRAP



510RX

PART #	WIRE SIZES	INNER QTY.	MASTER QTY.
510RX	14, 12, 10 IN 2 OR 3 CONDUCTOR, WITH OR WITHOUT GROUND. ALSO 14 IN UF	100	1000

FEATURES

- One hole
- Inverted rib provides strength to keep cable secure

APPLICATIONS

- Use to secure Romex® Brand nonmetallic sheathed cable in surface mount applications

STANDARD MATERIAL

- Steel


STANDARD FINISH

- Zinc plated

SE LOCK OVER CLIPS



135



FEATURES

- Securely attaches cable to fascia board

APPLICATIONS

- Fast and easy installation for service entrance cables

STANDARD MATERIAL


- Aluminum

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
136	4/3	100	1000	10	1.52"	.75"
137	2/3	100	1000	15	1.62"	.75"
138	2/0	50	500	20	1.82"	.89"
139	4/0	50	500	25	2.20"	1"

SERVICE ENTRANCE HOODS



709



FEATURES

- Constructed of crush proof PVC
- Eliminates sharp edges to avoid abrasion

APPLICATIONS

- Required in overhead applications

STANDARD MATERIAL

- PVC

CERTIFICATIONS

- UL

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
709	3#3-1	10	5	.425"	5"	2"
710	3#2/0-4/0	10	6	6"	5.19"	2.50"

RIGID OFFSET REDUCERS



1203

FEATURES

- Reduces conduit size to accommodate an existing knockout
- To offset the raceway

APPLICATIONS

- Add space to move conduit further away from wall


STANDARD MATERIAL

- Aluminum


PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
1203	2" x 1-1/4"	50	22
1204	2-1/2" x 2"	25	21

SERVICE ENTRANCE CAPS

CLAMP ON TYPE



731



FEATURES

- Provides water resistant cap to protect service entrance cables
- Clamp on style for unthreaded conduit

APPLICATIONS

- Use in an overhead service entrance
- Mounts on top of EMT, Rigid, or IMC conduit
- Serves as a connecting point for the service entrance wires

STANDARD MATERIAL

- Aluminum
- Steel strap

CERTIFICATIONS

- cULus


PART #	SIZE	INSIDE HOLE SIZE	# HOLES	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
731	1/2"	19/64"	4	10	50	9	2.93"	2.62"	2"
732TZ	3/4"	3/8" 13/32"	2 3	10	50	13	3.25"	2.75"	2.37"
733	1"	7/16" 1/2"	2 3	5	25	8	3.50"	3.25"	2.62"
734	1-1/4"	27/64" 5/8"	2 3	5	25	12	4.50"	3.25"	3"
735	1-1/2"	19/32" 7/16" 3/4"	2 1 3	3	15	10	5"	4.75"	3.31"
736	2"	17/32" 3/4" 1"	1 2 3	---	5	5	6.75"	6"	4.62"
737	2-1/2"	7/8" 1" 1-5/16"	3 1 3	---	1	3	10.50"	7.50"	6"
738	3"	7/8" 1" 1-5/16"	3 1 3	---	1	3	11.50"	9"	8"
739	3-1/2"	1-1/8" 1-3/4"	4 3	---	1	5	12"	9"	8"
740	4"	1-1/8" 1-3/4"	4 3	---	1	4	12"	9"	8"

SERVICE ENTRANCE CAPS

THREADED TYPE



741



FEATURES

- Provides water resistant cap to protect service entrance cables
- Threaded style enables easy installation

APPLICATIONS

- Use in an overhead service entrance
- Mounts on top of Rigid, or IMC conduit
- Serves as a connecting point for the service entrance wires

STANDARD MATERIAL

- Aluminum


CERTIFICATIONS

- cULus

PART #	SIZE	INSIDE HOLE SIZE	# HOLES	INNER QTY.	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B	C
741	1/2"	19/64"	4	5	50	12	2.68"	2.60"	2"
742	3/4"	3/8" 13/32"	2 3	5	50	15	3.80"	2.72"	2.37"
743	1"	7/16" 1/2"	2 3	---	50	15	3.32"	3.11"	2.62"
744	1-1/4"	27/64" 5/8"	2 3	---	20	10	4.46"	3.20"	3"
745	1-1/2"	19/32" 7/16" 3/4"	2 1 3	---	10	7	4.85"	4.34"	3.31"
746	2"	17/32" 3/4" 1"	1 2 3	---	5	4	6.62"	5.44"	4.62"
747	2-1/2"	7/8" 1" 1-5/16"	3 1 3	---	2	8	9.74"	7.80"	6"
748	3"	7/8" 1" 1-5/16"	3 1 3	---	1	6	10.50"	8"	8"
749TZ	3-1/2"	1-1/8" 1-3/4"	4 3	---	1	6	13.02"	9.39"	8"
750	4"	1-1/8" 1-3/4"	2 4	---	1	7	13.14"	8.54"	8"
750A	5"	1-1/8" 1-3/4"	2 4	---	1	12	11.28"	8.77"	8.25"
750B	6"	1-1/8" 1-3/4"	2 4	---	1	14	12.25"	9.76"	8.25"

SERVICE ENTRANCE CAPS

PVC



FEATURES

- Heavy duty construction
- Snap on cover

APPLICATIONS


- Use as a connecting point in an overhead service entrance for SEU cable
- Fits 2/3, 3#2/0 and #4/0 cables

STANDARD MATERIAL

- PVC

PART #	FITS CABLE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
727	2/3	30	8	2.75	2.75	1.87
729	3#2/0, #4/0	10	11	4.25	4.25	3

CLAMP ON WITH SPLIT INSULATOR



FEATURES

- Provides water resistant cap when mounted on conduit
- Eliminates sharp edges to protect wire

APPLICATIONS

- Required in overhead applications
- Fits 3#8 to 3#1 and #1/0 to 4/0 cables

STANDARD MATERIAL


- Zinc die cast
- Steel strap

PART #	FITS CABLE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
707	3#8 TO 3#1	20	8	2.37"	2.25"	2.25"
708	1/0 TO 4/0	10	11	4.93"	3.12"	3.75"

SET SCREW TYPE



704TZ



FEATURES

- Eliminates sharp edges to protect wire
- Extended hood

APPLICATIONS

- Required in overhead applications
- For 2" to 2-1/2" pipe sizes

STANDARD MATERIAL

- Aluminum


CERTIFICATIONS

- UL

PART #	PIPE SIZE	HEAD SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
704TZ	2"	1-1/4"	10	10	4.75"	4"	3.12"
705TZ	2-1/2"	1-1/4"	10	20	5.25"	4"	3"
706TZ	2-1/2"	2"	10	20	7"	5.50"	4.50"

ROOF FLASHINGS

GALVANIZED WITH NEOPRENE SEAL

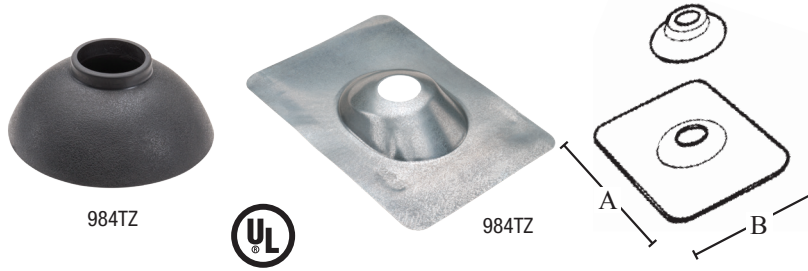

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
984TZ	1-1/4"	25	18	12.50"	8.75"
985TZ	1-1/2"	25	24	12.50"	8.375"
986TZ	2"	25	24	14.50"	10.75"
987	2-1/2"	25	25	14.50"	10.75"

FEATURES

- Strong galvanized steel with neoprene seal
- Flexible collar

APPLICATIONS

- Watertight protection for service entrance conduit or ventilation pipes
- Directs water flow away from riser pipe entry point


STANDARD MATERIAL

- Galvanized steel
- Neoprene seal

CERTIFICATIONS

- UL

NEOPRENE

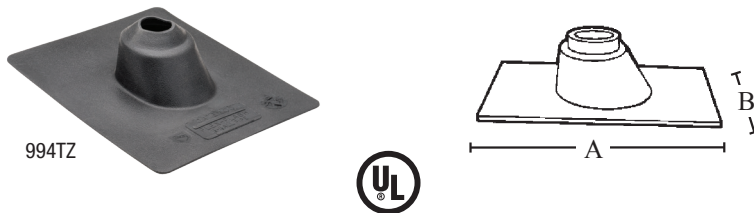

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
994TZ	1-1/4" - 1-1/2"	12	5	12.50"	8.75"
995TZ	2"	12	5	12.50"	8.375"
996	2-1/2"	12	5	14.50"	10.75"
997	3"	12	6	14.50"	10.75"

FEATURES

- Repels weather related damage from snow, ice and rain
- No caulking required
- Durable neoprene construction

APPLICATIONS

- Watertight protection for service entrance conduit or ventilation pipes
- Directs water flow away from riser pipe entry point

STANDARD MATERIAL

- Neoprene

CERTIFICATIONS

- UL

NO-CAULK



P-339

FEATURES

- Flashing base and collar are separate
- Fits flat surface up to 45 deg pitch
- For plastic, cast iron, or galvanized pipe

APPLICATIONS

- Prevents water leaks where conduit enters roof surface

STANDARD MATERIAL


- 24 gauge galvanized steel base, elastomeric compound collar

PART #	SIZE	MASTER QTY.
P-339	1-1/4" TO 1-1/2"	12
P-340	2"	12
P-342	3"	12
P-344	4"	12

METER HUBS



9663



FEATURES

- Includes hardware
- Corrosion resistant construction withstands inclement weather
- Mounting hole space is 2.5" on center

APPLICATIONS

- Attach to meter boxes or enclosures to provide threaded opening for conductors

STANDARD MATERIAL

- Zinc die cast


PART #	SIZE	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B
9663	1"	10	3	3.25"	3.25"
9674	1-1/4"	10	2	3.25"	3.25"
9685	1-1/2"	10	2	3.25"	3.25"
9696	2"	10	2	3.25"	3.25"
9707	2-1/2"	10	2	3.25"	3.25"

SILL PLATES

ZINC DIE CAST



591TZ



FEATURES

- Used in conjunction with sealing compound to offer maximum protection
- Domed top offers maximum protection
- Supplied with mounting screws

APPLICATIONS

- Protects wires and aluminum entry holes
- Sizes for EMT and SEU

STANDARD MATERIAL

- Zinc die cast

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B	C
591TZ	1/2" EMT & 3/4" EMT	10	100	10	2.37"	1"	2.61"
593	1" EMT & 3/3 SEU	10	100	40	2.50"	1.25"	3"
594	1-1/4" EMT & 2/3 SEU	---	25	15	2.61"	1.56"	3.76"
595	1-1/2" EMT	---	25	11	3.580"	1.738"	3.568"
596	4/0 SEU	---	20	17	5.81"	1.88"	3.48"
596A	2" EMT	---	25	16	4.20"	2.29"	4.76"

PVC (1900) AND ALUMINUM (ME14)



1900

FEATURES

- Corrosion resistant

APPLICATIONS

- Prevents water from entering structure when used with sealing compound (Southwire parts 1901 or 1905)

STANDARD MATERIAL

- PVC (1900) and Aluminum (ME14)

PART #	CABLE RANGE	INNER QTY.	MASTER QTY.
1900	#4 - 0	10	100
ME14	#3/0 - 4/0	---	5

DUCT-SEAL WEATHERPROOF COMPOUND

GRAY, ASBESTOS FREE



961



FEATURES

- Permanently soft
- Non-corrosive to metals or plastics; will not harm skin
- Adheres to clean surfaces

APPLICATIONS

- Forms water and air tight seals around junction boxes
- Deadens switch gear panel noise

STANDARD MATERIAL

- Non toxic compound; asbestos free

CERTIFICATIONS


- UL

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)
961	1 LB.	50	50
965TZ	5 LB.	10	50

SERVICE ENTRANCE ELLS-SLB



211TZ



FEATURES

- Provides easy access for service
- Includes cover and gasket

APPLICATIONS

- Enables effortless wire pulling when raceway alters direction

STANDARD MATERIAL

- Die cast copper free aluminum

CERTIFICATIONS

- UL


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
211TZ	1/2"	10	50	13	3.155"	1.187"	1.375"
212	3/4"	10	50	16	3.47"	1.36"	1.625"
213TZ	1"	5	25	12	4.18"	1.72"	1.9375"
214	1-1/4"	2	10	8	5.515"	2.178"	2.4375"
214XL	1-1/4" LONG	---	2	3	6.095"	2.41"	2.6875"
215	1-1/2"	1	5	6	6.595"	2.846"	3.0625"
216	2"	1	5	10	7.91"	2.75"	2.75"
216XL	2" LONG	---	1	3	7.74"	3.88"	3.375"

SERVICE ENTRANCE CABLE FITTINGS

KENNY CLAMPS



1750



FEATURES

- Use as a grounding and bonding connector
- 1/2" knockout

APPLICATIONS

- Bonds a grounding electrode conductor to metallic conduit panel boards or transformer enclosures

STANDARD MATERIAL

- Brass

CERTIFICATIONS

- UL


PART #	SIZE	KO SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1750	3/0 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1751	2/0 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1752	1/0 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1753	2 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1754	4 SOLID	1/2"	10	100	35	1.75"	1.0625"
1755	4 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1756	6 SOLID	1/2"	10	100	35	1.75"	1.0625"
1757	6 STRANDED	1/2"	10	100	35	1.75"	1.0625"
1758	8 SOLID	1/2"	10	100	35	1.75"	1.0625"
1759	8 STRANDED	1/2"	10	100	35	1.75"	1.0625"

WIREHOLDERS

ADJUSTABLE



999



FEATURES

- Corrosion resistant and electro-galvanized finish ensure a long product life in all climates
- The unique design allows for safe and secure installation of power drop cables on the outside of buildings

APPLICATIONS

- Protects sheathing and ensures performance

STANDARD MATERIAL

- Porcelain/steel

STANDARD FINISH


- Steel parts are electro-galvanized

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C
999	1-1/4" - 3"	20	34	7.62"	5.60"	1" X .875"

LIGHT DUTY WITH LAG SCREW



1001TZ



FEATURES

- Light duty
- Includes lag screw
- Single-point wireholders are strong and compact
- Heavy cup-base and strap is a single steel stamping, to which the screw is rigidly assembled

APPLICATIONS

- Secure wires before entry into a mast or SE cap

STANDARD MATERIAL

- Porcelain/steel

PART #	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
1001TZ	1-11/16"	100	25	3.0625"	1.375"	.5" X .375"	1.687"

WIREHOLDERS

MEDIUM DUTY WITH LAG SCREW



1002



FEATURES

- Medium duty
- Includes lag screw
- Single-point wireholders are strong and compact
- Heavy cup-base and strap is a single steel stamping, to which the screw is rigidly assembled

APPLICATIONS

- Secure wires before entry into a mast or SE cap

STANDARD MATERIAL


- Porcelain/steel

PART #	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
1002	2-1/4"	50	32	5.25"	1.968"	.5" X .375"	2.25"

SERVICE INSULATOR WIRE HOLDERS



P-19



FEATURES

- Secures incoming wires for overhead service entrance cable

STANDARD MATERIAL


- Porcelain

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
P-16	3/8" x 2-1/4"	50	.626	5.41"	1.875"	3/8"	2.25"
P-19	3/8" x 3"	50	.76	6.15"			3"
P-20	3/8" x 4"	25	.626	7.15"			4"

HEAVY DUTY WITH LAG SCREW



1003



FEATURES

- Heavy duty
- Includes lag screw
- Single-point wireholders are strong and compact
- Heavy cup-base and strap is a single steel stamping, to which the screw is rigidly assembled

APPLICATIONS

- Secure wires before entry into a mast or SE cap


STANDARD MATERIAL

- Porcelain/steel reinforced

PART #	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
1003	2-1/4"	50	34	6.1563"	1.875"	1" x .875"	2.25"

WIRESHOLDERS

HEAVY DUTY



FEATURES

- Heavy duty for optimal performance
- Protects sheathing
- Bolt or hanger assembly

APPLICATIONS



- Secure wires before their entry into a mast or SE cap

STANDARD MATERIAL

- Porcelain/steel

PART #	BOLT SIZE	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C	D
1004	3/8" x 5"	---	25	22	8.156"	1.875"	1" x .875"	5"
1008	HANGER	2"	25	31	6.416"	1.875"	1" x .875"	3.375"

WEDGE GRIP CLAMPS



FEATURES

- Solid 6-1/2" stainless steel bail
- High quality aluminum for durability

APPLICATIONS



- Supports power cables and other conductors when attached to buildings or utility poles

STANDARD MATERIAL

- Steel reinforced aluminum conductor

PART #	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	OPENING C
1005TZ	6 ACSR – 2 ACSR	50	8	3"	6.07"	5.45"
1006	4 ACSR – 1/0 ACSR	25	7	3.75"	7.26"	5.45"
1007	2/0 ACSR – 4/0 ACSR	25	8	3.75"	7.28"	5.45"

UNIVERSAL PIPE SUPPORT

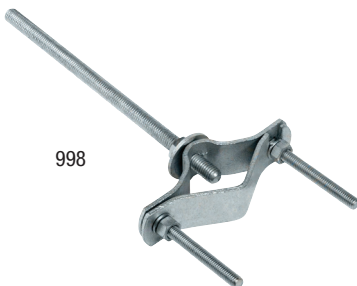

FEATURES

- 10" bolt
- High strength construction

APPLICATIONS

- Secure pipe sizes 1-1/4" to 3"

STANDARD MATERIAL

- Steel

PART #	BOLT SIZE	SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
998	1-1/4" – 3"	1/2"	20	18	4.125"	9.75"	1.25"

UTILITY SERVICE DROP, FORK BOLT BRACKETS

STEEL



FB

FEATURES

- 10" bolt
- High strength construction

APPLICATIONS

- Use to provide attachment points for miscellaneous drop wire clamps on buildings with deep walls

STANDARD MATERIAL

- Steel

STANDARD FINISH

- Hot dipped galvanized

PART #	BOLT LENGTH	DESCRIPTION	MASTER QTY.
FB	12"	FOR K BOLT BRACKETS FOR POWER LINE SUPPORT	10

UTILITY SERVICE DROP, MOUNTING PLATE

STEEL



SDP

FEATURES

- .59" diameter mounting hole and slot opening

APPLICATIONS

- Bolts to exterior of building structure providing attachment point for drop wire clamps

STANDARD MATERIAL

- Steel

STANDARD FINISH

- Hot dipped galvanized

PART #	DESCRIPTION	MASTER QTY.
SDP	SERVICE DROP MOUNTING PLATE	10

UTILITY POLE CONDUIT SUPPORT STAND-OFF BRACKET

STEEL



SOB-1

FEATURES

- 60" diameter pole mounting holes
- Clamping action stabilizes conduit on utility pole

APPLICATIONS

- Secures 2" to 6" conduit vertically to utility pole

STANDARD MATERIAL

- Steel

STANDARD FINISH

- Hot dipped galvanized


PART #	DESCRIPTION	MASTER QTY.
SOB-1	UTILITY POLE CONDUIT SUPPORT	10

WATERTIGHT CONNECTORS

FOR UF CABLE



871



FEATURES

- Compression type
- Rubber grommet

APPLICATIONS

- Use to secure SE/SEU cable to a metal enclosure
- Use to connect UF cable to a waterproof box with a threaded hub
- For SE/SEU flat style cable; two insulating conductors

STANDARD MATERIAL

- Steel or zinc

CERTIFICATIONS


- UL

PART #	SIZE	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	GROMMET OPENING		C
						A	B	
ZINC								
871	1/2"	2#14	25	250	43	.22" x .44"		1.437"
872TZ	3/4"	3#14	25	250	65	.22" x .44"		1.75"
STEEL								
871S								
872S	3/4" STEEL	3#14	25	250	45	.22" x .44"		1.75"

COMPRESSION TYPE



873



FEATURES

- Compression type
- Rubber grommet

APPLICATIONS

- Use to secure SE/SEU cable to a metal enclosure
- For SE/SEU flat style cable; two insulating conductors

STANDARD MATERIAL

- Zinc die cast


CERTIFICATIONS

- UL, CSA


PART #	SIZE	WIRE SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	GROMMET OPENING		C
						A	B	
873	1"	3#8	10	100	34	0.400"	0.630"	1.56"
873A	1"	3#6	10	100	34	0.440"	0.700"	1.56"
873B	1"	3#4	10	100	34	0.500"	0.800"	1.56"
874	1-1/4"	3#3	10	100	52	0.510"	0.850"	1.99"
874A	1-1/4"	3#2	10	100	52	0.570"	0.940"	1.99"
874B	1-1/4"	3#1	10	100	52	0.660"	1.120"	1.99"
875	1-1/2"	3#1/0	5	50	33	0.705"	1.195"	2.18"
875A	1-1/2"	3#2/0	5	50	32	0.740"	1.240"	2.18"
876	2"	3#1/0	5	50	44	0.705"	1.195"	2.41"
876A	2"	3#2/0	5	50	44	0.740"	1.240"	2.41"
876B	2"	3#3/0	5	50	44	0.830"	1.415"	2.41"
876C	2"	3#4/0	5	50	44	0.890"	1.540"	2.41"
876D	2"	3#4/0	5	50	44	0.990"	1.580"	2.41"

CONDUIT SUPPORTS

ALUMINUM LAG SCREW TYPE



1000



FEATURES

- Accommodates conduit sizes of 2" or 2-1/2"
- Includes lag screw

APPLICATIONS

- Affixes conduit to a structure or line pole

STANDARD MATERIAL


- Aluminum

PART #	CONDUIT SIZE	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1000	2"	2.375	25	15	2.875"	.875"
1000A	2-1/2"	2.75	25	26	3.30"	.875"

MALLEABLE IRON LAG SCREW TYPE



1106



FEATURES

- Accommodates conduit sizes of 2" or 2-1/2"
- Includes lag screw

APPLICATIONS

- Affixes conduit to a structure or line pole

STANDARD MATERIAL


- Malleable iron

PART #	CONDUIT SIZE	LAG	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1106	2"	2.375	25	32	2.70"	.985"
1107	2-1/2"	2.375	35	87	3.295"	1.08"

SPLIT RING



1097A



FEATURES

- Accommodates conduit sizes of 2" or 4"
- Includes lag screw

APPLICATIONS

- Affixes conduit to a structure or line pole

STANDARD MATERIAL

- Malleable iron

PART #	CONDUIT SIZE	BOLT SIZE	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
1097A	2"	1/2" - 10"	25	12	2.70"	.985"
1097	2-1/2"	1/2" - 10"	25	13	3.33"	1.071"
1098	3"	5/8" - 13"	10	25	4.50"	1.04"
1099	3-1/2"	5/8" - 13"	10	27	5.125"	1.075"
1100	4"	5/8" - 13"	10	28	5.593"	1.075"

SERVICE ENTRANCE MAST KITS

FEATURES

- Accommodates multiple specifications
- Kits eliminate need to purchase and stock additional components

APPLICATIONS

- Provides an assortment of SE mast components for the installation of overhead service drops

2" KIT



PART #	PIPE SIZE	MASTER QTY.	WEIGHT/CASE (LBS.)
1966	2"	1	4
CONSISTS OF 736, 986TZ, 1008, 1106			

2-1/2" KIT



PART #	PIPE SIZE	MASTER QTY.	WEIGHT/CASE (LBS.)
1977TZ	2-1/2"	1	4
CONSISTS OF 737, 987, 999, (2)1107			

SERVICE ENTRANCE CABLE FITTINGS



Southwire™

SERVICE ENTRANCE CATALOG

get social with us:



[/SOUTHWIRETOOLS](#)



[/SOUTHWIRE-COMPANY](#)



[@SOUTHWIRETOOLS](#)



[@SOUTHWIRE](#)



SCAN TO LEARN MORE

WWW.SOUTHWIRE.COM | 1-855-SWT00LS

All Trademarks or Registered Trademarks (TM/®) are owned or licensed by Southwire Company.
Any other TM/®- Trademark or Registered Trademark of Southwire Company.