



Southwire™

# CONDUIT BODIES CATALOG

**BUILT FOR DURABILITY.  
BUILT FOR RELIABILITY.  
BUILT FOR WORK.™**

[SOUTHWIRE.COM](http://SOUTHWIRE.COM)

# CONDUIT BODIES

---

Southwire Service Entrance products provide easy access for installation of Electrical service or maintenance. Service entrance caps are available in threaded, PVC, clamp on with split insulator and set screw type to protect service entrance cables. Meter hubs, Duct Seal and flashings are also available to secure and protect conduit and ventilation pipes.

Aluminum Service Entrance Caps – Clamp on

Aluminum Service Entrance Caps – Threaded

PVC Service Entrance Caps

Roof Flashings

Meter Hubs

Sill Plates

Duct Seal

Porcelain Wire holders

Utility Pole Brackets

Watertight Compression Connectors




# RIGID CONDUIT BODIES

## THREADED LB TYPE



LB1



### FEATURES

- Threaded LB type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LB1	1/2"	1	6 AWG	10	100	28	4.295"	2.15"	1.33"
LB2	3/4"	2	6 AWG	10	50	19	5.09"	2.43"	1.54"
LB3	1"	3	6 AWG	5	25	18	5.915"	2.765"	1.74"
LB4	1-1/4"	3	2 AWG	2	10	13	7.894"	3.665"	2.49"
LB5	1-1/2"	3	2 AWG	2	10	14	7.894"	3.665"	2.49"
LB6	2"	3	2/0 AWG	1	5	13	10.134"	4.275"	3.10"
LB7	2-1/2"	3	2/0 AWG	---	1	3	12.50"	5.437"	4.45"
LB8	3"	3	4/0 AWG	---	1	4	12.50"	5.675"	4.45"
LB9	3-1/2"	3	400 MCM	---	1	7	15.50"	6.922"	5.50"
LB10	4"	3	400 MCM	---	1	7	15.50"	6.922"	5.50"

## THREADED C TYPE



C1TZ



### FEATURES

- Threaded C type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
C1TZ	1/2"	1	6 AWG	10	100	24	4.72"	1.370"	1.33"
C2TZ	3/4"	2	6 AWG	10	50	21	5.57"	1.625"	1.54"
C3TZ	1"	3	6 AWG	5	25	15	6.46"	1.90"	1.74"
C4TZ	1-1/4"	3	2 AWG	2	10	15	8.528"	2.77"	2.49"
C5TZ	1-1/2"	3	2 AWG	2	10	9	8.528"	2.77"	2.49"
C6RTZ	2"	3	2/0 AWG	1	5	13	10.831"	3.335"	3.10"
C7	2-1/2"	3	4/0 AWG	---	1	3	13.50"	4.06"	4.45"
C8	3"	3	250 MCM	---	1	6	13"	4.685"	4.45"
C9	3-1/2"	3	350 MCM	---	1	8	15.937"	5.45"	5.50"
C10	4"	4	350 MCM	---	1	8	15.937"	5.45"	5.50"

# RIGID CONDUIT BODIES

## THREADED LL TYPE



LL1



### FEATURES

- Threaded LL type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LL1	1/2"	1	6 AWG	10	100	28	4.295"	1.37"	2.03"
LL2	3/4"	2	6 AWG	10	50	23	5.09"	1.625"	2.33"
LL3	1"	3	6 AWG	5	25	18	5.915"	1.90"	2.65"
LL4	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
LL5	1-1/2"	3	2 AWG	2	10	16	7.894"	2.77"	3.385"
LL6	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
LL7	2-1/2"	3	4/0 AWG	---	1	6	13"	4.063"	5.709"
LL8	3"	3	250 MCM	---	1	6	12.75"	4.682"	5.506"
LL9	3-1/2"	3	350 MCM	---	1	8	15.50"	5.452"	6.171"
LL10	4"	4	350 MCM	---	1	8	15.50"	5.452"	6.171"

## THREADED LR TYPE



LR1



### FEATURES

- Threaded LR type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LR1	1/2"	1	6 AWG	10	100	29	4.295"	1.37"	2.03"
LR2	3/4"	2	6 AWG	10	50	24	5.09"	1.625"	2.33"
LR3	1"	3	6 AWG	5	25	19	5.915"	1.90"	2.65"
LR4	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
LR5	1-1/2"	3	2 AWG	2	10	17	7.894"	2.77"	3.385"
LR6	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
LR7	2-1/2"	3	4/0 AWG	---	1	6	13.50"	4.063"	5.709"
LR8	3"	3	250 MCM	---	1	6	12.75"	4.682"	5.506"
LR9	3-1/2"	3	350 MCM	---	1	8	15.50"	5.452"	6.171"
LR10	4"	4	350 MCM	---	1	8	15.50"	5.452"	6.171"


CONDUIT BODIES

# RIGID CONDUIT BODIES

## THREADED T TYPE



T1



### FEATURES

- Threaded T type
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
T1	1/2"	1	6 AWG	10	100	32	4.72"	1.37"	2.03"
T2	3/4"	2	6 AWG	10	50	26	5.57"	1.625"	2.335"
T3	1"	3	6 AWG	5	25	18	6.46"	1.90"	2.705"
T4	1-1/4"	3	2 AWG	2	10	17	8.528"	2.77"	3.63"
T5	1-1/2"	3	2 AWG	2	10	19	8.528"	2.77"	3.63"
T6	2"	3	2/0 AWG	---	5	7	10.831"	3.335"	3.98"
T7	2-1/2"	3	4/0 AWG	---	1	7	13.50"	4.06"	5.825"
T8	3"	3	250 MCM	---	1	7	13"	4.685"	5.825"
T9	3-1/2"	3	350 MCM	---	1	9	15.937"	5.45"	7.06"
T10	4"	4	350 MCM	---	1	9	15.937"	5.45"	7.06"

# RIGID CONDUIT BODIES WITH COVER AND GASKET

## THREADED LB TYPE



LB1CG



### FEATURES

- Threaded LB type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LB1CG	1/2"	1	6 AWG	10	100	34	4.295"	2.15"	1.33"
LB2CG	3/4"	2	6 AWG	10	50	23	5.09"	2.43"	1.54"
LB3CG	1"	3	6 AWG	5	25	19	5.915"	2.765"	1.74"
LB4CG	1-1/4"	3	2 AWG	2	10	14	7.894"	3.665"	2.49"
LB5CG	1-1/2"	3	2 AWG	2	10	15	7.894"	3.665"	2.49"
LB6CG	2"	3	2/0 AWG	1	5	14	10.134"	4.275"	3.10"
LB7CG	2-1/2"	3	2/0 AWG	---	1	7	12.50"	5.437"	4.45"
LB8CG	3"	3	4/0 AWG	---	1	7	12.50"	5.675"	4.45"
LB9CG	3-1/2"	3	400 MCM	---	1	10	15.50"	6.922"	5.50"
LB10CG	4"	3	400 MCM	---	1	10	15.50"	6.922"	5.50"

# RIGID CONDUIT BODIES WITH COVER AND GASKET

## THREADED C TYPE



C1CG

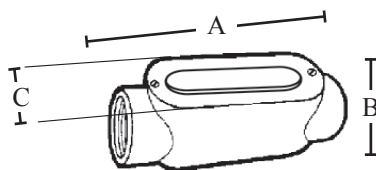

### FEATURES

- Threaded C type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
C1CG	1/2"	1	6 AWG	10	100	30	4.72"	1.37"	1.33"
C2CG	3/4"	2	6 AWG	10	50	25	5.57"	1.625"	1.54"
C3CG	1"	3	6 AWG	5	25	18	6.46"	1.90"	1.74"
C4CG	1-1/4"	3	2 AWG	2	10	17	8.528"	2.77"	2.49"
C5CG	1-1/2"	3	2 AWG	2	10	19	8.528"	2.77"	2.49"
C6CG	2"	3	2/0 AWG	1	5	14	10.831"	3.335"	3.10"
C7CG	2-1/2"	3	4/0 AWG	---	1	7	13.50"	4.06"	4.45"
C8CG	3"	3	250 MCM	---	1	7	13.50"	4.685"	4.45"
C9CG	3-1/2"	3	350 MCM	---	1	10	15.937"	5.45"	5.50"
C10CG	4"	4	350 MCM	---	1	10	15.937"	5.45"	5.50"

## THREADED LL TYPE



LL1CG



### FEATURES

- Threaded LL type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LL1CG	1/2"	1	6AWG	10	100	36	4.295"	1.37"	2.03"
LL2CG	3/4"	2	6AWG	10	50	23	5.09"	1.625"	2.33"
LL3CG	1"	3	6AWG	5	25	19	5.915"	1.90"	2.65"
LL4CG	1-1/4"	3	2AWG	2	10	15	7.894"	2.77"	3.385"
LL5CG	1-1/2"	3	2AWG	2	10	16	7.894"	2.77"	3.385"
LL6CG	2"	3	2/0AWG	1	5	14	10.134"	3.335"	3.81"
LL7CG	2-1/2"	3	4/0AWG	---	1	7	13"	4.063"	5.709"
LL8CG	3"	3	250MCM	---	1	7	12.75"	4.682"	5.506"
LL9CG	3-1/2"	3	350MCM	---	1	10	15.50"	5.452"	6.171"
LL10CG	4"	4	350MCM	---	1	10	15.50"	5.452"	6.171"


CONDUIT BODIES

# RIGID CONDUIT BODIES WITH COVER AND GASKET

## THREADED LR TYPE



LR1CG



### FEATURES

- Threaded LR type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LR1CG	1/2"	1	6 AWG	10	100	36	4.295"	1.37"	2.03"
LR2CG	3/4"	2	6 AWG	10	50	28	5.09"	1.625"	2.33"
LR3CG	1"	3	6 AWG	5	25	17	5.915"	1.90"	2.65"
LR4CG	1-1/4"	3	2 AWG	2	10	15	7.894"	2.77"	3.385"
LR5CG	1-1/2"	3	2 AWG	2	10	18	7.894"	2.77"	3.385"
LR6CG	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
LR7CG	2-1/2"	3	4/0 AWG	---	1	7	13"	4.063"	5.709"
LR8CG	3"	3	250 MCM	---	1	7	12.75"	4.682"	5.506"
LR9CG	3-1/2"	3	350 MCM	---	1	10	15.50"	5.452"	6.171"
LR10CG	4"	4	350 MCM	---	1	10	15.50"	5.452"	6.171"

## THREADED T TYPE



T1CG



### FEATURES

- Threaded T type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
T1CG	1/2"	1	6 AWG	10	100	38	4.72"	1.37"	1.33"
T2CG	3/4"	2	6 AWG	10	50	30	5.57"	1.625"	1.54"
T3CG	1"	3	6 AWG	5	25	20	6.46"	1.90"	1.74"
T4CG	1-1/4"	3	2 AWG	2	10	19	8.528"	2.77"	2.49"
T5CG	1-1/2"	3	2 AWG	2	10	21	8.528"	2.77"	2.49"
T6CG	2"	3	2/0 AWG	---	5	10	10.831"	3.335"	3.10"
T7CG	2-1/2"	3	4/0 AWG	---	1	4	13.50"	4.06"	5.825"
T8CG	3"	3	250 MCM	---	1	5	13.50"	4.685"	5.825"
T9CG	3-1/2"	3	350 MCM	---	1	12	15.937"	5.45"	7.06"
T10CG	4"	4	350 MCM	---	1	9	15.937"	5.45"	7.06"

# EMT CONDUIT BODIES

## SET SCREW LB TYPE



ELB1

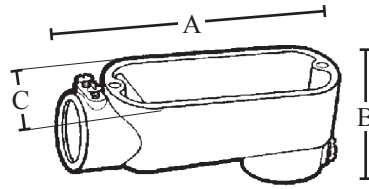

### FEATURES

- Set screw EMT LB type
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
ELB1	1/2"	1	6 AWG	10	100	28	4.295"	2.15"	1.33"
ELB2	3/4"	2	6 AWG	10	50	19	5.09"	2.43"	1.54"
ELB3	1"	3	6 AWG	5	25	20	5.915"	2.765"	1.74"
ELB4	1-1/4"	3	2 AWG	2	10	13	7.894"	3.665"	2.49"
ELB5	1-1/2"	3	2 AWG	2	10	14	7.894"	3.665"	2.49"
ELB6	2"	3	2/0 AWG	1	5	13	10.134"	4.275"	3.10"
ELB7	2-1/2"	3	2/0 AWG	---	1	6	12.50"	5.437"	4.45"
ELB8	3"	3	4/0 AWG	---	1	6	12.50"	5.657"	4.45"
ELB9	3-1/2"	3	400 MCM	---	1	8	15.50"	6.922"	5.50"
ELB10	4"	3	400 MCM	---	1	8	15.50"	6.922"	5.50"

## SET SCREW C TYPE



EC1



### FEATURES

- Set screw C type
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
EC1	1/2"	1	6 AWG	10	100	24	4.72"	1.370"	1.33"
EC2	3/4"	2	6 AWG	10	50	21	5.57"	1.625"	1.54"
EC3	1"	3	6 AWG	5	25	25	6.46"	1.90"	1.74"
EC4	1-1/4"	3	2 AWG	2	10	15	8.528"	2.77"	2.49"
EC5	1-1/2"	3	2 AWG	2	10	17	8.528"	2.77"	2.49"
EC6	2"	3	2/0 AWG	1	5	13	10.831"	3.335"	3.10"
EC7	2-1/2"	3	4/0 AWG	---	1	6	13"	4.063"	5.709"
EC8	3"	3	250 MCM	---	1	7	12.50"	4.682"	5.506"
EC9	3-1/2"	3	350 MCM	---	1	8	15.50"	5.452"	6.171"
EC10	4"	4	350 MCM	---	1	8	15.50"	5.452"	6.171"

# EMT CONDUIT BODIES

## SET SCREW LL TYPE



ELL1



### FEATURES

- Set screw LL type
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	MAX. NUMBER	MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
ELL1	1/2"	1	6 AWG	10	100	30	4.295"	1.37"	2.03"
ELL2	3/4"	2	6 AWG	10	50	23	5.09"	1.625"	2.33"
ELL3	1"	3	6 AWG	5	25	18	5.915"	1.90"	2.65"
ELL4	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
ELL5	1-1/2"	3	2 AWG	2	10	16	7.894"	2.77"	3.385"
ELL6	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
ELL7	2-1/2"	3	4/0 AWG	---	1	6	12.50"	5.437"	4.45"
ELL8	3"	3	250 MCM	---	1	6	12.50"	5.657"	4.45"
ELL9	3-1/2"	3	350 MCM	---	1	8	15.50"	6.922"	5.50"
ELL10	4"	4	350 MCM	---	1	8	15.50"	6.922"	5.50"

## SET SCREW LR TYPE



ELR1



### FEATURES

- Set screw LR type
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE MAX. NUMBER	MAX. SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
ELR1	1/2"	1	6 AWG	10	100	30	4.295"	1.37"	2.03"
ELR2	3/4"	2	6 AWG	10	50	24	5.09"	1.625"	2.33"
ELR3	1"	3	6 AWG	5	25	16	5.915"	1.90"	2.65"
ELR4	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
ELR5	1-1/2"	3	2 AWG	2	10	17	7.894"	2.77"	3.385"
ELR6	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
ELR7	2-1/2"	3	4/0 AWG	---	1	6	12.50"	5.437"	4.45"
ELR8	3"	3	250 MCM	---	1	6	12.50"	5.657"	4.45"
ELR9	3-1/2"	3	350 MCM	---	1	8	15.50"	6.922"	5.50"
ELR10	4"	4	350 MCM	---	1	8	15.50"	6.922"	5.50"

# EMT CONDUIT BODIES

## SET SCREW T TYPE



ET1



### FEATURES

- Set screw T type
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
ET1	1/2"	1	6 AWG	10	100	32	4.72"	1.37"	2.03"
ET2	3/4"	2	6 AWG	10	50	30	5.57"	1.625"	2.335"
ET3	1"	3	6 AWG	5	25	15	6.46"	1.90"	2.705"
ET4	1-1/4"	3	2 AWG	2	10	17	8.528"	2.77"	3.63"
ET5	1-1/2"	3	2 AWG	2	10	19	8.528"	2.77"	3.63"
ET6	2"	3	2/0 AWG	---	2	5	10.831"	3.335"	3.98"
ET7	2-1/2"	3	4/0 AWG	---	1	7	13.50"	4.06"	5.825"
ET8	3"	3	250 MCM	---	1	7	13.50"	4.685"	5.825"
ET9	3-1/2"	3	350 MCM	---	1	9	15.937"	5.45"	7.06"
ET10	4"	4	350 MCM	---	1	9	15.937"	5.45"	7.06"

# EMT CONDUIT BODIES WITH COVER AND GASKET

## SET SCREW LB TYPE



ELB1CG



### FEATURES

- Set screw LB type with cover and gasket
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
ELB1CG	1/2"	1	6 AWG	10	100	32	4.295"	2.15"	1.33"
ELB2CG	3/4"	2	6 AWG	10	50	23	5.09"	2.43"	1.54"
ELB3CG	1"	3	6 AWG	5	25	19	5.915"	2.765"	1.74"
ELB4CG	1-1/4"	3	2 AWG	2	10	14	7.894"	3.665"	2.49"
ELB5CG	1-1/2"	3	2 AWG	2	10	15	7.894"	3.665"	2.49"
ELB6CG	2"	3	2/0 AWG	1	5	14	10.134"	4.275"	3.10"
ELB7CG	2-1/2"	3	2/0 AWG	---	1	7	12.50"	5.437"	4.45"
ELB8CG	3"	3	4/0 AWG	---	1	7	12.50"	5.657"	4.45"
ELB9CG	3-1/2"	3	400 MCM	---	1	10	15.50"	6.922"	5.50"
ELB10CG	4"	3	400 MCM	---	1	10	15.50"	6.922"	5.50"

# EMT CONDUIT BODIES WITH COVER AND GASKET SET SCREW C TYPE



EC1CG



## FEATURES

- Set screw C type with cover and gasket
- Suitable for use in concrete

## APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

## STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

## STANDARD FINISH

- Powder coat

## CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
EC1CG	1/2"	1	6 AWG	10	100	31	4.72"	1.37"	1.33"
EC2CG	3/4"	2	6 AWG	10	50	21	5.57"	1.625"	1.54"
EC3CG	1"	3	6 AWG	5	25	17	6.46"	1.90"	1.74"
EC4CG	1-1/4"	3	2 AWG	2	10	14	8.528"	2.77"	2.49"
EC5CG	1-1/2"	3	2 AWG	2	10	15	8.528"	2.77"	2.49"
EC6CG	2"	3	2/0 AWG	1	5	10	10.831"	3.335"	3.10"
EC7CG	2-1/2"	3	4/0 AWG	---	1	4	13"	4.063"	5.709"
EC8CG	3"	3	250 MCM	---	1	5	12.50"	4.682"	5.506"
EC9CG	3-1/2"	3	350 MCM	---	1	8	15.50"	5.452"	6.171"
EC10CG	4"	4	350 MCM	---	1	8	15.50"	5.452"	6.171"

# SET SCREW LL TYPE



ELL1CG



## FEATURES

- Set screw LL type with cover and gasket
- Suitable for use in concrete

## APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

## STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

## STANDARD FINISH

- Powder coat

## CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
ELL1CG	1/2"	1	6 AWG	10	100	30	4.295"	1.37"	2.03"
ELL2CG	3/4"	2	6 AWG	10	50	23	5.09"	1.625"	2.33"
ELL3CG	1"	3	6 AWG	5	25	18	5.915"	1.90"	2.65"
ELL4CG	1-1/4"	3	2 AWG	2	10	14	7.894"	2.77"	3.385"
ELL5CG	1-1/2"	3	2 AWG	2	10	16	7.894"	2.77"	3.385"
ELL6CG	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
ELL7CG	2-1/2"	3	4/0 AWG	---	1	6	12.50"	5.437"	4.45"
ELL8CG	3"	3	250 MCM	---	1	6	12.50"	5.657"	4.45"
ELL9CG	3-1/2"	3	350 MCM	---	1	8	15.50"	6.922"	5.50"
ELL10CG	4"	4	350 MCM	---	1	8	15.50"	6.922"	5.50"

# EMT CONDUIT BODIES WITH COVER AND GASKET

## SET SCREW LR TYPE



ELR1CG

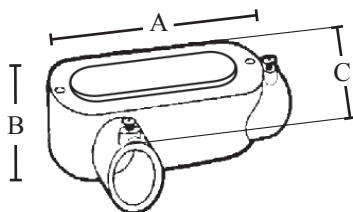

### FEATURES

- Set screw LR type with cover and gasket
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
ELR1CG	1/2"	1	6 AWG	10	100	36	4.295"	1.37"	2.03"
ELR2CG	3/4"	2	6 AWG	10	50	28	5.09"	1.625"	2.33"
ELR3CG	1"	3	6 AWG	5	25	17	5.915"	1.90"	2.65"
ELR4CG	1-1/4"	3	2 AWG	2	10	15	7.894"	2.77"	3.385"
ELR5CG	1-1/2"	3	2 AWG	2	10	18	7.894"	2.77"	3.385"
ELR6CG	2"	3	2/0 AWG	1	5	14	10.134"	3.335"	3.81"
ELR7CG	2-1/2"	3	4/0 AWG	---	1	7	12.50"	5.437"	4.45"
ELR8CG	3"	3	250 MCM	---	1	7	12.50"	5.657"	4.45"
ELR9CG	3-1/2"	3	350 MCM	---	1	10	15.50"	6.922"	5.50"
ELR10CG	4"	4	350 MCM	---	1	10	15.50"	6.922"	5.50"

## SET SCREW T TYPE



ET1CG



### FEATURES

- Set screw T type with cover and gasket
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
ET1CG	1/2"	1	6 AWG	10	100	38	4.72"	1.37"	2.03"
ET2CG	3/4"	2	6 AWG	10	50	30	5.57"	1.625"	2.335"
ET3CG	1"	3	6 AWG	5	25	20	6.46"	1.90"	2.705"
ET4CG	1-1/4"	3	2 AWG	2	10	19	8.528"	2.77"	3.63"
ET5CG	1-1/2"	3	2 AWG	2	10	21	8.528"	2.77"	3.63"
ET6CG	2"	3	2/0 AWG	1	5	5	10.831"	3.335"	3.98"
ET7CG	2-1/2"	3	4/0 AWG	---	1	8	13.50"	4.06"	5.825"
ET8CG	3"	3	250 MCM	---	1	8	13.50"	4.685"	5.825"
ET9CG	3-1/2"	3	350 MCM	---	1	11	15.937"	5.45"	7.06"
ET10CG	4"	4	350 MCM	---	1	11	15.937"	5.45"	7.06"

# EMT AND RIGID COMBINATION CONDUIT BODIES

## LB TYPE



LB1SS



### FEATURES

- Combination LB type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LB1SS	1/2"	1	6 AWG	10	100	28	4.56"	2.06"	1.31"
LB2SS	3/4"	2	6 AWG	10	50	19	5.31"	2.37"	1.48"
LB3SS	1"	3	6 AWG	5	25	18	6.25"	2.63"	1.75"
LB4SS	1-1/4"	3	2 AWG	2	10	13	8.22"	3.50"	2.40"
LB5SS	1-1/2"	3	2 AWG	2	10	14	8.22"	3.75"	2.40"
LB6SS	2"	3	2/0 AWG	---	5	13	10.13"	4.13"	3.10"

## C TYPE



C1SS



### FEATURES

- Combination C type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
C1SS	1/2"	1	6 AWG	10	100	24	5.35"	1.31"	1.31"
C2SS	3/4"	2	6 AWG	10	50	21	6"	1.62"	1.48"
C3SS	1"	3	6 AWG	5	25	15	7.06"	1.88"	1.75"
C4SS	1-1/4"	3	2 AWG	2	10	15	9.25"	2.50"	2.40"
C5SS	1-1/2"	3	2 AWG	2	10	17	9.25"	2.67"	2.40"
C6SS	2"	3	2/0 AWG	---	5	13	11.50"	3.29"	3.05"

# EMT AND RIGID COMBINATION CONDUIT BODIES

## LL TYPE



LL1SS



### FEATURES

- Combination LL type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LL1SS	1/2"	1	6 AWG	10	100	28	4.56"	1.31"	2.06"
LL2SS	3/4"	2	6 AWG	10	50	23	5.31"	1.62"	2.23"
LL3SS	1"	3	6 AWG	5	25	18	6.25"	1.88"	2.50"
LL4SS	1-1/4"	3	2 AWG	2	10	14	8.22"	2.50"	3.40"
LL5SS	1-1/2"	3	2 AWG	2	10	16	8.22"	2.67"	3.48"
LL6SS	2"	3	2/0 AWG	---	5	14	10.48"	3.29"	4.07"

## LR TYPE



LR1SS



### FEATURES

- Combination LR type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LR1SS	1/2"	1	6 AWG	10	100	29	4.56"	1.31"	2.06"
LR2SS	3/4"	2	6 AWG	10	50	24	5.31"	1.62"	2.23"
LR3SS	1"	3	6 AWG	5	25	19	6.25"	1.88"	2.50"
LR4SS	1-1/4"	3	2 AWG	2	10	14	8.22"	2.50"	3.40"
LR5SS	1-1/2"	3	2 AWG	2	10	17	8.22"	2.67"	3.48"
LR6SS	2"	3	2/0 AWG	---	5	4	10.48"	3.29"	4.07"

# EMT AND RIGID COMBINATION CONDUIT BODIES

## T TYPE



T1SS



### FEATURES

- Combination T type
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Steel screws

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
T1SS	1/2"	1	6 AWG	10	100	32	5.35"	1.31"	2.02"
T2SS	3/4"	2	6 AWG	10	50	26	6"	1.62"	2.22"
T3SS	1"	3	6 AWG	5	25	18	7.06"	1.88"	2.56"
T4SS	1-1/4"	3	2 AWG	2	10	17	7.25"	2.50"	3.50"
T5SS	1-1/2"	3	2 AWG	2	10	19	9.25"	2.67"	3.50"
T6SS	2"	3	2/0 AWG	---	5	5	11.50"	3.29"	4.25"

# EMT AND RIGID COMBINATION CONDUIT BODIES WITH COVER AND GASKET

## LB TYPE



LB1SSCG



### FEATURES

- Combination LB type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LB1SSCG	1/2"	1	6 AWG	10	100	34	4.56"	2.06"	1.31"
LB2SSCG	3/4"	2	6 AWG	10	50	23	5.31"	2.37"	1.48"
LB3SSCG	1"	3	6 AWG	5	25	19	6.25"	2.63"	1.75"
LB4SSCG	1-1/4"	3	2 AWG	2	10	14	8.22"	3.50"	2.40"
LB5SSCG	1-1/2"	3	2 AWG	2	10	15	8.22"	3.75"	2.40"
LB6SSCG	2"	3	2/0 AWG	---	5	14	10.13"	4.28"	3.10"

# EMT AND RIGID COMBINATION CONDUIT BODIES WITH COVER AND GASKET

## C TYPE



C1SSCG



### FEATURES

- Combination C type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
C1SSCG	1/2"	1	6 AWG	10	100	30	5.35"	1.31"	1.31"
C2SSCG	3/4"	2	6 AWG	10	50	21	6"	1.62"	1.48"
C3SSCG	1"	3	6 AWG	5	25	17	7.06"	1.88"	1.75"
C4SSCG	1-1/4"	3	2 AWG	2	10	12	9.25"	2.50"	2.40"
C5SSCG	1-1/2"	3	2 AWG	2	10	15	9.25"	2.67"	2.40"
C6SSCG	2"	3	2/0 AWG	---	5	10	11.50"	3.29"	3.05"

## LL TYPE



LL1SSCG



### FEATURES

- Combination LL type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LL1SSCG	1/2"	1	6 AWG	10	100	36	4.56"	1.31"	2.06"
LL2SSCG	3/4"	2	6 AWG	10	50	23	5.31"	1.62"	2.23"
LL3SSCG	1"	3	6 AWG	5	25	19	6.25"	1.88"	2.50"
LL4SSCG	1-1/4"	3	2 AWG	2	10	15	8.22"	2.50"	3.40"
LL5SSCG	1-1/2"	3	2 AWG	2	10	16	8.22"	2.67"	3.48"
LL6SSCG	2"	3	2/0 AWG	---	5	14	10.48"	3.29"	4.07"

# EMT AND RIGID COMBINATION CONDUIT BODIES WITH COVER AND GASKET

## LR TYPE



LR1SSCG



### FEATURES

- Combination LR type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
LR1SSCG	1/2"	1	6 AWG	10	100	30	4.56"	1.31"	2.06"
LR2SSCG	3/4"	2	6 AWG	10	50	20	5.31"	1.62"	2.23"
LR3SSCG	1"	3	6 AWG	5	25	16	6.25"	1.88"	2.50"
LR4SSCG	1-1/4"	3	2 AWG	2	10	12	8.22"	2.50"	3.40"
LR5SSCG	1-1/2"	3	2 AWG	2	10	12	8.22"	2.67"	3.48"
LR6SSCG	2"	3	2/0 AWG	---	5	9	10.48"	3.29"	4.07"

## T TYPE



T1SSCG



### FEATURES

- Combination T type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
T1SSCG	1/2"	1	6 AWG	10	100	35	5.35"	1.31"	2.02"
T2SSCG	3/4"	2	6 AWG	10	50	23	6"	1.62"	2.22"
T3SSCG	1"	3	6 AWG	5	25	18	7.06"	1.88"	2.56"
T4SSCG	1-1/4"	3	2 AWG	2	10	13	7.25"	2.50"	3.50"
T5SSCG	1-1/2"	3	2 AWG	2	10	11	9.25"	2.67"	3.50"
T6SSCG	2"	3	2/0 AWG	---	5	10	11.50"	3.29"	4.25"

# EMT AND RIGID COMBINATION CONDUIT BODIES WITH COVER AND GASKET

## TB TYPE



TB1SSCG



### FEATURES

- Combination TB type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- NEMA FB 1 rated for wet locations use with threaded rigid metal conduit only

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

### STANDARD FINISH

- Powder coat

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	WIRE SIZE		INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE						
TB1SSCG	1/2"	1	6 AWG	10	100	38	5.35"	1.31"	2.02"
TB2SSCG	3/4"	2	6 AWG	10	50	30	6"	1.62"	2.22"
TB3SSCG	1"	3	6 AWG	5	25	18	7.06"	1.88"	2.56"
TB4SSCG	1-1/4"	3	2 AWG	2	10	17	7.25"	2.50"	3.50"
TB5SSCG	1-1/2"	3	2 AWG	2	10	19	9.25"	2.67"	3.50"
TB6SSCG	2"	3	2/0 AWG	---	5	14	11.50"	3.29"	4.25"

# CONDUIT BODY GASKETS



581



### FEATURES

- Provides dust proof seal between conduit body and cover to protect from hazardous elements
- Fits all Form 5 LB, LL, LR, C and T type conduit bodies and covers

### APPLICATIONS

- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- For use with Southwire Conduit Bodies 1/2" – 4"

### STANDARD MATERIAL

- Neoprene


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
581	1/2"	50	500	1	3.935"	1.36"
582	3/4"	50	500	1	4.60"	1.55"
583	1"	25	500	2	5.37"	1.76"
584	1-1/4" – 1-1/2"	25	500	2	7.25"	2.50"
586	2"	25	250	2	9.50"	3.07"
587	2-1/2" – 3"	10	100	2	12.125"	4.355"
589	3-1/2" – 4"	5	50	2	14.812"	5.40"

# CONDUIT BODY COVERS

## ALUMINUM WITH SCREWS



571



### FEATURES

- Lightweight and corrosion resistant
- Includes screws

### APPLICATIONS

- Designed for use with Southwire Conduit Bodies; interchangeable with all major brands

### STANDARD MATERIAL

- Aluminum

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
571	1/2"	25	250	15	3.875"	1.31"
572	3/4"	25	250	20	4.625"	1.52"
573	1"	10	100	9	5.315"	1.71"
574	1-1/4" - 1-1/2"	---	25	4	7.24"	2.51"
576	2"	---	25	7	9.484"	3.11"
577	2-1/2" - 3"	---	10	8	12.187"	4.44"
579	3-1/2" - 4"	---	5	7	14.937"	5.50"

## HOT DIP GALVANIZED - MALLEABLE IRON



571MHDG



Conforms to finish thickness  
ASTM A123/123M

### FEATURES

- Hot dip galvanized for added durability and corrosion protection, use with gasket for wet locations
- Includes screws
- Fits malleable conduit body

### APPLICATIONS

- Compatible with all Form 5 & Form 35 series conduit bodies
- For use with Southwire Conduit Bodies 1/2" - 4"

### STANDARD MATERIAL

- Malleable iron
- Galvanized steel screws

### STANDARD FINISH

- Hot dip galvanized

### CERTIFICATIONS

- UL Standard: 514B
- Fed. Spec. A-A-50563
- NEMA FB 1


PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
571MHDG	1/2"	10	100	24	3.97"	1.34"
572MHDG	3/4"	10	100	31	4.68"	1.57"
573MHDG	1"	5	50	21	5.39"	1.79"
574MHDG	1-1/4" - 1-1/2"	---	25	23	7.23"	2.52"
576MHDG	2"	---	25	52	9.51"	3.15"
577MHDG	2-1/2" - 3"	---	10	35	12.24"	4.45"
579MHDG	3-1/2" - 4"	---	10	55	14.99"	5.53"

# CONDUIT BODY COVERS

## ZINC PLATED STEEL WITH SCREWS



571S



PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B
571S	1/2"	25	250	15	3.875"	1.31"
572S	3/4"	25	250	20	4.625"	1.52"
573S	1"	10	100	8	5.315"	1.71"
574S	1-1/4" – 1-1/2"	---	25	4	7.24"	2.51"
576S	2"	---	25	7	9.484"	3.11"
577S	2-1/2" – 3"	---	10	7	12.187"	4.44"
579S	3-1/2" – 4"	---	5	9	14.937"	5.50"

### FEATURES

- Domed design allows for additional wiring space
- Includes screws
- Fits malleable conduit body

### APPLICATIONS

- Designed for use with Southwire Conduit Bodies; interchangeable with all major brands

### STANDARD MATERIAL

- Steel

### STANDARD FINISH

- Zinc plated

### CERTIFICATIONS


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA FB 1

# MOGUL CONDUIT BODIES WITH COVER AND GASKET

## LB TYPE - ALUMINUM



MLBCG4



PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
MLBCG4	1-1/4"	3	2 AWG	40	5	8	9.68"	4.29"	2.12"
MLBCG5	1-1/2"	3	1/0 AWG	128	2	10	14.56"	6.32"	3.18"
MLBCG6	2"	3	4/0 AWG	128	2	9	14.56"	6.32"	3.18"

### FEATURES

- Meets NEC 6x requirement
- NEMA FB 1, UL listed for use in wet locations
- Protects electrical installations in extreme industrial environments

### APPLICATIONS

- Mogul conduit bodies are used to gain greater access to the interior of a raceway for wire pulling, inspection and maintenance where the raceway changes direction

### STANDARD MATERIAL

- Body - Aluminum
- Gasket - Fiber
- Stainless steel screws

### CERTIFICATIONS



- cULus
- NEMA FB 1

# MOGUL CONDUIT BODIES WITH COVER AND GASKET

LB TYPE WITH ROLLERS - HOT DIP GALVANIZED - MALLEABLE IRON



MLB3CGHDG

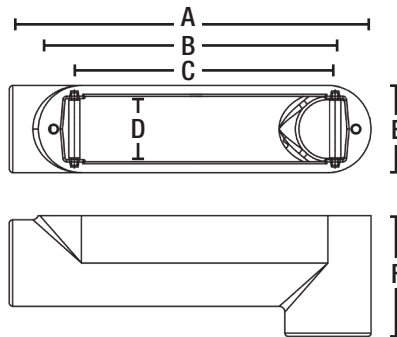

## FEATURES

- c(UL)us wet locations
- Built in cable pulling roller
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

## APPLICATIONS

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

## STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

## STANDARD FINISH

- Hot dip galvanized

## CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R



PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E	F
		MAX. NUMBER	MAX. SIZE									
MLB3CGHDG	1"	3	4 AWG	19	1	4	8.62"	5.98"	---	1.71"	2.19"	2.81"
MLB4CGHDG	1-1/4"	3	2 AWG	25	1	5	8.62"	5.98"	---	1.71"	2.19"	3.25"
MLB5CGHDG	1-1/2"	3	1/0 AWG	57	1	9	12.72"	10"	9.17"	2.26"	3.03"	3.63"
MLB6CGHDG	2"	3	4/0 MCM	75	1	13	12.72"	10"	9.17"	2.26"	3.03"	4.23"
MLB7CGHDG	2-1/2"	3	300 MCM	163	1	22	16.93"	15"	10.86"	3.41"	4.27"	5.22"
MLB8CGHDG	3"	3	350 MCM	211	1	38	16.93"	15"	10.86"	3.41"	4.27"	6.02"
MLB9CGHDG	3-1/2"	3	500 MCM	375	1	48	22.20"	19.96"	15.08"	4.28"	5.31"	6.71"
MLB10CGHDG	4"	3	500 MCM	439	1	59	22.20"	19.96"	15.08"	4.28"	5.31"	7.19"


CONDUIT BODIES

# MOGUL CONDUIT BODIES WITH COVER AND GASKET

C TYPE WITH ROLLERS - HOT DIP GALVANIZED - MALLEABLE IRON



MC3CGHDG

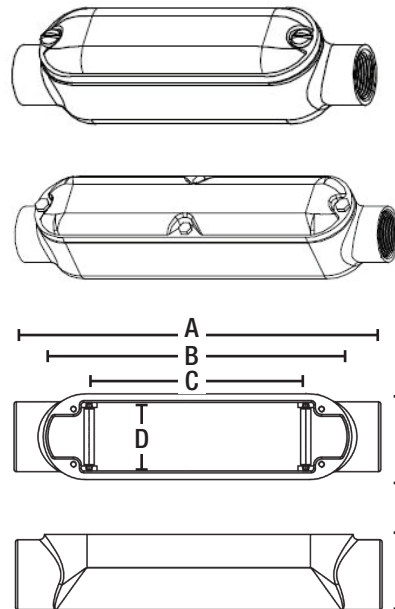

## FEATURES

- c(UL)us wet locations
- Built in cable pulling roller
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

## APPLICATIONS

- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

## STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

## STANDARD FINISH

- Hot dip galvanized

## CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R



PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E	F
MC3CGHDG	1"	3	4 AWG	19	1	4	9.57"	5.98"	---	1.71"	2.19"	1.88"
MC4CGHDG	1-1/4"	3	2 AWG	25	1	6	9.57"	5.98"	---	1.71"	2.19"	2.13"
MC5CGHDG	1-1/2"	3	1/0 AWG	57	1	10	13.75"	10"	9.17"	2.27"	3.03"	2.58"
MC6CGHDG	2"	3	4/0 MCM	75	1	14	13.75"	10"	9.17"	2.27"	3.03"	3.17"
MC7CGHDG	2-1/2"	3	300 MCM	163	1	29	18.40"	15"	10.86"	3.41"	4.27"	3.76"
MC8CGHDG	3"	3	300 MCM	211	1	38	18.40"	15"	10.86"	3.41"	4.27"	4.57"
MC9CGHDG	3-1/2"	3	350 MCM	375	1	56	23.19"	19.98"	15.08"	4.29"	5.31"	5.03"
MC10CGHDG	4"	3	350 MCM	439	1	65	23.19"	19.98"	15.08"	4.29"	5.31"	5.52"



CONDUIT BODIES

# MOGUL CONDUIT BODIES WITH COVER AND GASKET

LL TYPE - HOT DIP GALVANIZED - MALLEABLE IRON



MLL3CGHDG

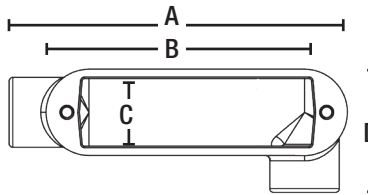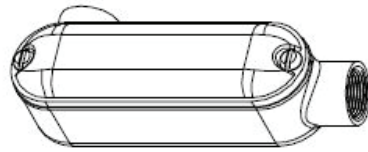

## FEATURES

- c(UL)us wet locations
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

## APPLICATIONS

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

## STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

## STANDARD FINISH

- Hot dip galvanized

## CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R




PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E
		MAX. NUMBER	MAX. SIZE								
MLL3CGHDG	1"	3	4 AWG	19	1	4	8.62"	5.98"	1.71"	3.12"	1.87"
MLL4CGHDG	1-1/4"	3	2 AWG	25	1	6	8.62"	5.98"	1.71"	3.12"	2.31"
MLL5CGHDG	1-1/2"	3	1/0 AWG	57	1	10	12.72"	10"	2.26"	4.08"	2.58"
MLL6CGHDG	2"	3	4/0 AWG	75	1	14	12.72"	10"	2.26"	4.08"	3.17"

# MOGUL CONDUIT BODIES WITH COVER AND GASKET

LR TYPE - HOT DIP GALVANIZED - MALLEABLE IRON



MLR3CGHDG

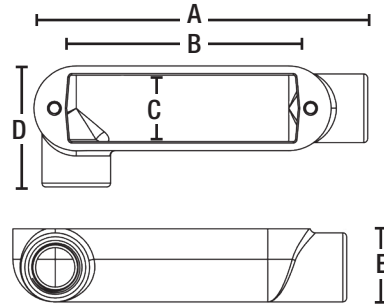

## FEATURES

- c(UL)us wet locations
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

## APPLICATIONS

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

## STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

## STANDARD FINISH

- Hot dip galvanized

## CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R



PART #	SIZE	WIRE SIZE MAX. NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E
MLR3CGHDG	1"	3	4 AWG	19	1	4	8.62"	5.98"	1.71"	3.12"	1.87"
MLR4CGHDG	1-1/4"	3	2 AWG	25	1	6	8.62"	5.98"	1.71"	3.12"	2.31"
MLR5CGHDG	1-1/2"	3	1/0 AWG	57	1	10	12.72"	10"	2.26"	4.08"	2.58"
MLR6CGHDG	2"	3	4/0 AWG	75	1	14	12.72"	10"	2.26"	4.08"	3.17"


CONDUIT BODIES

# MOGUL CONDUIT BODIES WITH COVER AND GASKET

T TYPE - HOT DIP GALVANIZED - MALLEABLE IRON



MT3CGHDG

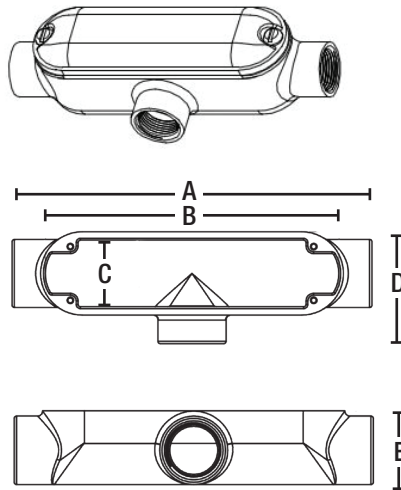

## FEATURES

- c(UL)us wet locations
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

## APPLICATIONS

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

## STANDARD MATERIAL

- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

## STANDARD FINISH

- Hot dip galvanized

## CERTIFICATIONS

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R




PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C	D	E
		MAX. NUMBER	MAX. SIZE								
MT3CGHDG	1"	3	4 AWG	19	1	4	9.57"	5.98"	1.71"	3.13"	1.87"
MT4CGHDG	1-1/4"	3	2 AWG	25	1	6	9.57"	5.98"	1.71"	3.13"	2.31"
MT5CGHDG	1-1/2"	3	1/0 AWG	57	1	10	13.74"	10"	2.26"	4.08"	2.58"
MT6CGHDG	2"	3	4/0 MCM	75	1	14	13.74"	10"	2.26"	4.08"	3.17"
MT7CGHDG	2-1/2"	3	300 MCM	163	1	29	18.39"	15"	3.41"	5.73"	3.76"
MT8CGHDG	3"	3	300 MCM	211	1	38	18.39"	15"	3.41"	5.73"	4.57"
MT9CGHDG	3-1/2"	3	350 MCM	375	1	56	23.89"	19.97"	4.29"	6.98"	5.02"
MT10CGHDG	4"	3	350 MCM	439	1	65	23.89"	19.97"	4.29"	6.98"	5.51"

# RIGID CONDUIT BODIES

## THREADED LB TYPE - MALLEABLE IRON



LB1M



### FEATURES

- NPT tapered hubs
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Zinc plated, aluminum enameled

### CERTIFICATIONS


- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE		MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX. NUMBER	MAX. SIZE					
LB1M	1/2"	---	---	10	7	4.56"	2.06"	1.31"
LB2M	3/4"	3	6 AWG	10	9	5.31"	2.37"	1.48"
LB3M	1"	3	4 AWG	5	6	6.25"	2.63"	1.75"
LB4M	1-1/4"	3	2 AWG	5	23	8.22"	3.50"	2.40"
LB5M	1-1/2"	3	1/0 AWG	10	26	8.22"	3.75"	2.40"
LB6M	2"	3	4/0 AWG	5	26	10.48"	4.31"	3.05"
LB7M	2-1/2"	3	300 MCM	1	10	13.75"	4.45"	4.38"
LB8M	3"	3	350 MCM	1	13	13.75"	4.45"	4.38"
LB9M	3-1/2"	3	500 MCM	1	22	16.75"	5.80"	5.63"
LB10M	4"	3	500 MCM	1	24	16.75"	5.80"	5.63"

## THREADED LB TYPE - HOT DIP GALVANIZED



LB1MHDG



Conforms to finish thickness ASTM A123/123M

### FEATURES

- Hot dip galvanized finish provides superior protection against severe environmental factors

### APPLICATIONS

- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Hot dip galvanized

### CERTIFICATIONS

- UL Standard: UL 514A and UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1

PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
LB1MHDG	1/2"	---	---	4.5	10	7	4.69"	2.18"	1.36"
LB2MHDG	3/4"	3	6 AWG	7.5	10	9	5.42"	2.36"	1.57"
LB3MHDG	1"	3	4 AWG	12.5	5	6	6.28"	2.86"	1.79"
LB4MHDG	1-1/4"	3	2 AWG	32.3	5	12	8.12"	3.49"	2.52"
LB5MHDG	1-1/2"	3	1/0 AWG	35.3	2	11	8.15"	3.69"	2.52"
LB6MHDG	2"	3	4/0 AWG	73	1	6	10.53"	4.52"	3.15"
LB7MHDG	2-1/2"	3	300 MCM	142	1	10	13.76"	5.39"	4.45"
LB8MHDG	3"	3	400 MCM	173	1	13	13.82"	6.18"	4.45"
LB9MHDG	3-1/2"	3	500 MCM	300	1	22	16.65"	7.19"	5.53"
LB10MHDG	4"	3	500 MCM	328	1	24	16.65"	7.36"	5.53"


CONDUIT BODIES

# RIGID CONDUIT BODIES

## THREADED C TYPE - MALLEABLE IRON



C1M

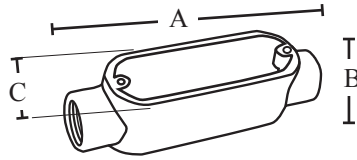

### FEATURES

- NPT tapered hubs
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for maintenance and future system changes
- Connects conduit sections

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Zinc plated, aluminum enameled

### CERTIFICATIONS


- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
C1M	1/2"	---	---	4.5	10	7	5.35"	1.31"	1.31"
C2M	3/4"	3	6 AWG	7.5	10	23	6"	1.62"	1.48"
C3M	1"	3	4 AWG	12.5	5	6	7.06"	1.88"	1.75"
C4M	1-1/4"	3	2 AWG	32.3	5	23	9.25"	2.50"	2.40"
C5M	1-1/2"	3	1/0 AWG	35.3	2	26	9.25"	2.67"	2.40"
C6M	2"	3	3/0 AWG	73	1	26	11.50"	3.29"	3.05"
C7M	2-1/2"	3	250 MCM	138	1	10	15"	3.9063"	4.312"
C8M	3"	3	250 MCM	170	1	12	15.125"	4.75"	4.312"
C9M	3-1/2"	3	350 MCM	300	1	21	18.125"	5.1875"	4.875"
C10M	4"	3	350 MCM	328	1	23	18.125"	5.5625"	4.875"

## THREADED C TYPE - HOT DIP GALVANIZED



C1MHDG

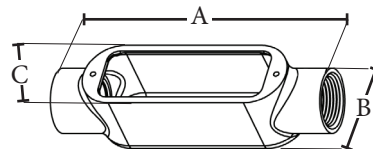

Conforms to finish thickness ASTM A123/123M

### FEATURES

- Hot dip galvanized finish provides superior protection against severe environmental factors

### APPLICATIONS

- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Hot dip galvanized

### CERTIFICATIONS

- UL Standard: UL 514A and UL514D
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
C1MHDG	1/2"	---	---	4.5	10	6	5.43"	1.46"	1.36"
C2MHDG	3/4"	3	6 AWG	7.5	10	9	6.18"	1.65"	1.57"
C3MHDG	1"	3	4 AWG	12.5	5	6	7.16"	1.98"	1.79"
C4MHDG	1-1/4"	3	2 AWG	32.3	5	12	9"	2.60"	2.52"
C5MHDG	1-1/2"	3	1/0 AWG	35.3	2	6	9.07"	2.80"	2.52"
C6MHDG	2"	3	3/0 AWG	73	1	6	11.54"	3.52"	3.15"
C7MHDG	2-1/2"	3	250 MCM	138	1	10	15.28"	3.98"	4.45"
C8MHDG	3"	3	250 MCM	170	1	15	15.39"	4.65"	4.45"
C9MHDG	3-1/2"	3	350 MCM	300	1	27	18.30"	5.43"	5.53"
C10MHDG	4"	3	350 MCM	328	1	24	18.30"	5.74"	5.53"

# RIGID CONDUIT BODIES

## THREADED LL TYPE - MALLEABLE IRON



LL1M



### FEATURES

- NPT tapered hubs
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Zinc plated, aluminum enameled

### CERTIFICATIONS

- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
LL1M	1/2"	---	---	4.5	10	7	4.56"	1.31"	2.06"
LL2M	3/4"	3	6 AWG	7.5	10	9	5.31"	1.62"	2.23"
LL3M	1"	3	4 AWG	12.5	5	6	6.25"	1.88"	2.50"
LL4M	1-1/4"	3	2 AWG	32.3	5	23	8.22"	2.50"	3.40"
LL5M	1-1/2"	3	1/0 AWG	35.3	10	26	8.22"	2.67"	3.48"
LL6M	2"	3	4/0 AWG	73	5	26	10.48"	3.29"	4.07"
LL7M	2-1/2"	3	300 MCM	138	1	10	13.6094"	3.9063"	5.718"
LL8M	3"	3	350 MCM	170	1	13	13.875"	4.75"	5.875"
LL9M	3-1/2"	3	50 MCM	300	1	22	16.50"	6.8125"	7.125"
LL10M	4"	3	350 MCM	328	1	24	16.50"	7.1875"	7.125"


## THREADED LL TYPE - HOT DIP GALVANIZED



LL1MHDG



Conforms to finish thickness ASTM A123/123M



### FEATURES

- Hot dip galvanized finish provides superior protection against severe environmental factors

### APPLICATIONS

- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Hot dip galvanized

### CERTIFICATIONS

- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563
- NEMA: FB 1

PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
LL1MHDG	1/2"	---	---	4.5	10	7	4.69"	1.46"	2.08"
LL2MHDG	3/4"	3	6 AWG	7.5	10	10	5.42"	1.65"	2.31"
LL3MHDG	1"	3	4 AWG	12.5	5	6	6.28"	1.98"	2.68"
LL4MHDG	1-1/4"	3	2 AWG	32.3	5	13	8.12"	2.60"	3.41"
LL5MHDG	1-1/2"	3	1/0 AWG	35.3	2	6	8.15"	2.80"	3.45"
LL6MHDG	2"	3	4/0 AWG	73	1	6	10.53"	3.52"	4.15"
LL7MHDG	2-1/2"	3	300 MCM	142	1	10	13.76"	3.98"	5.86"
LL8MHDG	3"	3	350 MCM	173	1	13	13.82"	4.65"	5.92"
LL9MHDG	1/2"	3	350 MCM	300	1	22	16.65"	5.43"	7.14"
LL10MHDG	4"	3	350 MCM	330	1	24	16.65"	5.74"	7.19"


CONDUIT BODIES

# RIGID CONDUIT BODIES

## THREADED LR TYPE - MALLEABLE IRON



LR1M



### FEATURES

- NPT tapered hubs
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Zinc plated, aluminum enameled

### CERTIFICATIONS


- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
LR1M	1/2"	---	---	4.5	10	7	4.56"	1.31"	2.06"
LR2M	3/4"	3	6 AWG	7.5	10	9	5.31"	1.62"	2.23"
LR3M	1"	3	4 AWG	12.5	5	6	6.25"	1.88"	2.50"
LR4M	1-1/4"	3	2 AWG	32.3	5	23	8.22"	2.50"	3.40"
LR5M	1-1/2"	3	1/0 AWG	35.3	10	26	8.22"	2.67"	3.48"
LR6M	2"	3	4/0 AWG	73	5	26	10.48"	3.29"	4.07"
LR7M	2-1/2"	3	300 MCM	138	1	10	13.75"	4.45"	4.38"
LR8M	3"	3	350 MCM	170	1	13	13.75"	4.45"	4.38"
LR9M	1/2"	3	350 MCM	300	1	22	16.75"	5.80"	5.63"
LR10M	4"	3	350 MCM	328	1	24	16.75"	5.80"	5.63"

## THREADED LR TYPE - HOT DIP GALVANIZED



LR1MHDG



Conforms to finish thickness ASTM A123/123M

### FEATURES

- Hot dip galvanized finish provides superior protection against severe environmental factors

### APPLICATIONS

- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Hot dip galvanized

### CERTIFICATIONS

- UL Standard: UL 514A and UL 514D
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
LR1MHDG	1/2"	---	---	4.5	10	7	4.69"	1.46"	2.08"
LR2MHDG	3/4"	3	6 AWG	7.5	10	10	5.42"	1.65"	2.31"
LR3MHDG	1"	3	4 AWG	12.5	5	6	6.28"	1.98"	2.68"
LR4MHDG	1-1/4"	3	2 AWG	32.3	5	13	8.12"	2.60"	3.41"
LR5MHDG	1-1/2"	3	1/0 AWG	35.3	2	6	8.15"	2.80"	3.45"
LR6MHDG	2"	3	4/0 AWG	73	1	6	10.53"	3.52"	4.15"
LR7MHDG	2-1/2"	3	300 MCM	142	1	10	13.76"	3.98"	5.86"
LR8MHDG	3"	3	350 MCM	173	1	13	13.82"	4.65"	5.92"
LR9MHDG	3-1/2"	3	350 MCM	300	1	22	16.65"	5.43"	7.14"
LR10MHDG	4"	3	350 MCM	330	1	24	16.65"	5.74"	7.19"

# RIGID CONDUIT BODIES

## THREADED T TYPE - MALLEABLE IRON



T1M

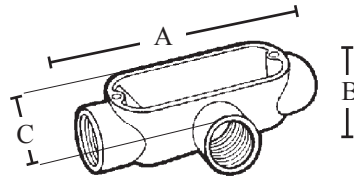

### FEATURES

- NPT tapered hubs
- Suitable for use in concrete

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Zinc plated, aluminum enameled

### CERTIFICATIONS


- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
T1M	1/2"	---	---	6	10	8	5.35"	1.31"	2.02"
T2M	3/4"	3	6 AWG	9.5	10	12	6"	1.62"	2.22"
T3M	1"	3	4 AWG	15	5	9	7.06"	1.88"	2.56"
T4M	1-1/4"	3	2 AWG	33	5	16	7.25"	2.50"	3.50"
T5M	1-1/2"	3	1 AWG	36	2	7	9.25"	2.67"	3.50"
T6M	2"	3	2/0 AWG	75	1	6	11.50"	3.29"	4.25"
T7M	2-1/2"	3	4/0 AWG	138	1	12	15"	3.9375"	5.718"
T8M	3"	3	4/0 AWG	170	1	15	15.125"	4.75"	8.875"
T9M	3-1/2"	3	350 MCM	300	1	23	18.125"	5.2031"	6.812"
T10M	4"	3	350 MCM	328	1	24	18.125"	5.5625"	7.203"

## THREADED T TYPE - HOT DIP GALVANIZED



T1MHDG

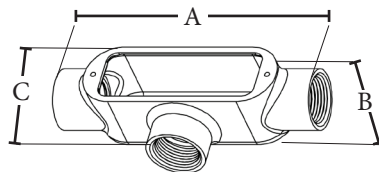

Conforms to finish thickness ASTM A123/123M

### FEATURES

- Hot dip galvanized finish provides superior protection against severe environmental factors

### APPLICATIONS

- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90° bends in conduit runs

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Hot dip galvanized

### CERTIFICATIONS

- UL Standard: UL 514A and UL 514D
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
T1MHDG	1/2"	---	---	4	10	9	5.35"	1.31"	2.02"
T2MHDG	3/4"	3	6 AWG	7	10	11	6"	1.62"	2.22"
T3MHDG	1"	3	4 AWG	12	5	8	7.06"	1.88"	2.56"
T4MHDG	1-1/4"	3	2 AWG	33	5	14	7.25"	2.50"	3.50"
T5MHDG	1-1/2"	3	1 AWG	36	2	6	9.25"	2.67"	3.50"
T6MHDG	2"	3	2/0 AWG	76	1	6	11.50"	3.29"	4.25"
T7MHDG	2-1/2"	3	300 MCM	146	1	12	15"	3.94"	5.72"
T8MHDG	3"	3	300 MCM	185	1	15	15.125"	4.75"	8.88"
T9MHDG	3-1/2"	3	350 MCM	300	1	27	18.125"	5.20"	6.81"
T10MHDG	4"	3	350 MCM	330	1	28	18.125"	5.56"	7.20"

# RIGID CONDUIT BODIES

## THREADED TB TYPE - MALLEABLE IRON



TB1M



### FEATURES

- NPT tapered hubs

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Zinc plated, aluminum enameled

### CERTIFICATIONS


- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
TB1M	1/2"	---	---	5.6	10	10	5.25"	1.9375"	1.9375"
TB2M	3/4"	3	6 AWG	9.5	10	6	6.0625"	1.5625"	1.5625"
TB3M	1"	3	4 AWG	15	5	20	7.125"	1.8125"	1.8125"
TB4M	1-1/4"	3	2 AWG	33	5	19	9.3125"	2.4375"	3.75"
TB5M	1-1/2"	3	1 AWG	36	2	20	9.3125"	2.4375"	3.75"
TB6M	2"	3	2/0 AWG	75	1	13	11.8125"	3.8125"	4.125"

## THREADED X TYPE - MALLEABLE IRON



X1M



### FEATURES

- NPT tapered hubs

### APPLICATIONS

- Provides access to conductors for pulling, splicing and maintenance

### STANDARD MATERIAL

- Malleable iron

### STANDARD FINISH

- Zinc plated, aluminum enameled

### CERTIFICATIONS

- UL 514A
- Fed. Spec. W-C-586D, A-A-50563
- NEMA FB 1


PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
X1M	1/2"	---	---	5.6	10	12	5.25"	2.8125"	1.75"
X2M	3/4"	3	6 AWG	9.5	10	14	6.0625"	2.9375"	2"
X3M	1"	3	4 AWG	15	5	23	7.125"	3.5625"	2.25"
X4M	1-1/4"	3	2 AWG	33	5	20	9.125"	4.4375"	2.5625"
X5M	1-1/2"	3	1 AWG	36	2	22	9.125"	4.4375"	2.75"
X6M	2"	3	2/0 AWG	75	1	16	11.75"	5.375"	3.4375"

# RIGID CONDUIT BODIES

## LB TYPE - FORM 7



LB1G7

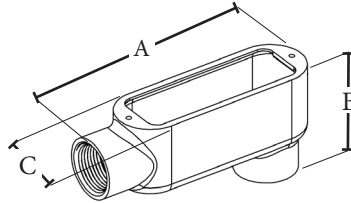

### FEATURES

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

### APPLICATIONS

- Serves as pull outlet for conductors being installed
- Enables 90° bends in conduit system
- Provides openings for making splices and taps in conductors
- Connects and changes direction of conduit runs
- Provides access to conductors for maintenance and future system changes

### STANDARD MATERIAL

- Gray iron

### STANDARD FINISH

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids

### CERTIFICATIONS

- UL Standard: UL 514A and UL 514D
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
LB1G7	1/2"	---	---	3.8	10	8	4.50"	1.50"	2.20"
LB2G7	3/4"	3	6 AWG	5.8	10	12	5.20"	1.70"	2.50"
LB3G7	1"	3	4 AWG	9	5	9	6.20"	1.80"	2.90"
LB4G7	1-1/4"	3	2 AWG	17.8	10	25	6.50"	2.20"	3.20"
LB5G7	1-1/2"	3	2 AWG	24.5	10	30	7.10"	2.40"	3.50"
LB6G7	2"	3	1/0 AWG	45	5	24	8.10"	3"	4.10"
LB7G7	2-1/2"	3	3/0 AWG	95.8	1	8	10.70"	4.30"	5.30"
LB8G7	3"	3	3/0 AWG	119	1	10	10.70"	4.30"	6"
LB9G7	3-1/2"	3	300 MCM	208	1	14	12.80"	5.30"	6.60"
LB10G7	4"	3	300 MCM	231	1	17	12.80"	5.30"	7.10"

# RIGID CONDUIT BODIES

## C TYPE - FORM 7



C1G7

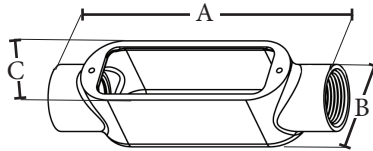

### FEATURES

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

### APPLICATIONS

- Serves as pull outlet for conductors being installed

### STANDARD MATERIAL

- Gray iron

### STANDARD FINISH

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCl spray test)
- Highly resistant to solvents, fuels and acids

### CERTIFICATIONS


- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563
- NEMA: FB 1

PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
C1G7	1/2"	---	---	3.8	10	8	5.30"	1.50"	1.40"
C2G7	3/4"	3	6 AWG	5.8	10	12	6.20"	1.70"	1.70"
C3G7	1"	3	4 AWG	9	5	9	7.30"	1.80"	1.90"
C4G7	1-1/4"	3	2 AWG	17.8	10	27	7.40"	2.20"	2.30"
C5G7	1-1/2"	3	2 AWG	24	10	33	8.20"	2.40"	2.60"
C6G7	2"	3	1/0 AWG	45	5	25	9.10"	3"	3.10"
C7G7	2-1/2"	3	2/0 AWG	95.8	1	10	12.40"	4.30"	3.70"
C8G7	3"	3	2/0 AWG	119	1	13	12.40"	4.30"	4.40"

## LL TYPE - FORM 7



LL1G7



### FEATURES

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

### APPLICATIONS

- Serves as pull outlet for conductors being installed

### STANDARD MATERIAL

- Gray iron

### STANDARD FINISH

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCl spray test)
- Highly resistant to solvents, fuels and acids

### CERTIFICATIONS

- UL Standard: UL 514A and UL 514D
- Fed. Spec: A-A-50563
- NEMA: FB 1


PART #	SIZE	WIRE SIZE MAX NUMBER	WIRE SIZE MAX. SIZE	INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
LL1G7	1/2"	---	---	3.8	10	8	4.50"	2.30"	1.40"
LL2G7	3/4"	3	6 AWG	5.8	10	12	5.20"	2.50"	1.70"
LL3G7	1"	3	4 AWG	9	5	9	6.20"	2.80"	1.90"
LL4G7	1-1/4"	3	2 AWG	17.8	10	25	6.50"	3.10"	2.30"
LL5G7	1-1/2"	3	2 AWG	24	10	30	7.10"	3.40"	2.60"
LL6G7	2"	3	1/0 AWG	45	5	24	8.10"	4"	3.10"
LL7G7	2-1/2"	3	250 MCM	95.8	1	8	10.70"	5.80"	3.70"
LL8G7	3"	3	250 MCM	119	1	10	10.70"	5.80"	4.40"
LL10G7	4"	3	350 MCM	231	1	17	12.80"	7"	5.40"

# RIGID CONDUIT BODIES

## LR TYPE - FORM 7



T1G7



### FEATURES

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

### APPLICATIONS

- Serves as pull outlet for conductors being installed

### STANDARD MATERIAL

- Gray iron

### STANDARD FINISH

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCl spray test)
- Highly resistant to solvents, fuels and acids

### CERTIFICATIONS


- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563
- NEMA: FB 1

PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
LR1G7	1/2"	---	---	3.8	10	8	4.50"	2.30"	1.40"
LR2G7	3/4"	3	6 AWG	5.8	10	12	5.20"	2.50"	1.70"
LR3G7	1"	3	4 AWG	9	5	9	6.20"	2.80"	1.90"
LR4G7	1-1/4"	3	2 AWG	17.8	10	25	6.50"	3.10"	2.30"
LR5G7	1-1/2"	3	2 AWG	24	10	30	7.10"	3.40"	2.60"
LR6G7	2"	3	1/0 AWG	45	5	24	8.10"	4"	3.10"
LR7G7	2-1/2"	3	250 MCM	95.8	1	8	10.70"	5.80"	3.70"
LR8G7	3"	3	250 MCM	119	1	10	10.70"	5.80"	4.40"
LR10G7	4"	3	350 MCM	231	1	17	12.80"	7"	5.40"

## T TYPE - FORM 7



T1G7

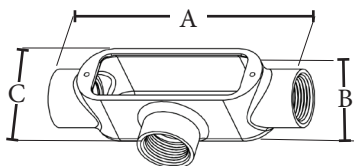

### FEATURES

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

### APPLICATIONS

- Serves as pull outlet for conductors being installed

### STANDARD MATERIAL

- Gray iron

### STANDARD FINISH

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCl spray test)
- Highly resistant to solvents, fuels and acids

### CERTIFICATIONS

- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563

PART #	SIZE	WIRE SIZE		INTERNAL VOLUME (IN <sup>3</sup> )	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	C
		MAX NUMBER	MAX. SIZE						
T1G7	1/2"	---	---	3.8	10	8	5.30"	2.50"	1.80"
T2G7	3/4"	3	6 AWG	5.8	10	13	6.20"	2.70"	2"
T3G7	1"	3	4 AWG	9	5	9	7.30"	3"	2.30"
T4G7	1-1/4"	3	2 AWG	17.8	10	26	7.40"	3.10"	2.30"
T5G7	1-1/2"	3	2 AWG	24	10	32	8.20"	3.40"	2.60"
T6G7	2"	3	1/0 AWG	45	5	25	9.10"	4"	3.10"
T7G7	2-1/2"	3	2/0 AWG	95.8	1	8	12.40"	5.80"	3.70"
T8G7	3"	3	2/0 AWG	119	1	11	12.40"	5.80"	4.40"
T10G7	4"	3	250 MCM	231	1	18	14.50"	7"	5.40"


CONDUIT BODIES

# CONDUIT BODY COVER

## FORM 7 LIQUIDTIGHT WITH INTEGRAL GASKET



771GLT



### FEATURES

- Domed for extra capacity
- Liquidtight, raintight, oiltight
- Suitable for use in Class I Division 2, Class II Division 1 & 2, Class III Division 1 hazardous locations
- Unique wedge clamp cover design allows easy removal without damaging the conduit body; domed cover design provides additional capacity
- NEMA 3R rated

### APPLICATIONS

- Interchangeable with all major brand Form 7 conduit bodies

### STANDARD MATERIAL

- Gray iron
- Stainless steel screws
- Silicone gasket

### STANDARD FINISH

- Eco-friendly finish with superior corrosion resistant coating
- Exceeds 200 hour salt spray test

### CERTIFICATIONS

- UL Standard: UL 514A
- Fed. Spec: A-A-50563
- NEMA: FB 1 NEMA 3R Raintight




PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/ CASE (LBS.)	A	B	DEPTH
771GLT	1/2"	10	100	36	3.70"	1.30"	.60"
772GLT	3/4"	10	100	38	4.30"	1.60"	.50"
773GLT	1"	5	50	29	5"	1.80"	.60"
774GLT	1-1/4"	---	25	21	5.60"	2.20"	.70"
775GLT	1-1/2"	---	20	21	6.10"	2.40"	.70"
776GLT	2"	---	20	40	7.10"	3"	.70"
777GLT	2-1/2" - 3"	---	10	20	9.10"	4.30"	.80"
779GLT	3-1/2" - 4"	---	10	31	11"	5.30"	.80"

# STEEL CONDUIT BODY COVER

## FORM 7 WITH INTEGRAL GASKET



771S



### FEATURES

- Domed for extra capacity
- Cover screws help prevent water from entering the conduit body
- Unique wedge clamp cover design allows easy removal without damaging the conduit body
- NEMA 3R

### APPLICATIONS

- Interchangeable with all major brand Form 7 conduit bodies

### STANDARD MATERIAL

- Steel cover
- Stainless steel screws
- Silicone gasket

### STANDARD FINISH

- Zinc plated

### CERTIFICATIONS

- UL Standard: UL 514A and UL 514B
- Fed. Spec: A-A-50563
- NEMA: FB 1 NEMA 3R

PART #	SIZE	INNER QTY.	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B	DEPTH
771S	1/2"	10	100	11	3.70"	1.30"	.30"
772S	3/4"	10	100	15	4.30"	1.60"	.30"
773S	1"	5	50	10	5"	1.80"	.30"
774S	1-1/4"	---	25	7	5.60"	2.20"	.30"
775S	1-1/2"	---	20	6	6.10"	2.30"	.30"
776S	2"	---	20	8	7.10"	3"	.30"
777S	2-1/2" – 3"	---	10	9	9.10"	4.30"	.50"
779S	3-1/2" – 4"	---	10	12	11"	5.30"	.50"

# EZLB™ SERVICE ENTRANCE CONDUIT BODY

## PVC



EZLB200



### FEATURES

- Patented 3 piece design allows additional wire volume to maneuver wire into place
- Split boy design eliminates pinch points
- Design allows easy installation and eliminates wire damage
- Includes 2" collar to connect to PVC conduit
- Includes gasket for wet locations

### APPLICATIONS

- For ease of installation of Optical Fiber Cables.

### STANDARD MATERIAL

- Molded PVC

### CERTIFICATIONS

- cULus Listed

PART #	MATERIAL TYPE	SIZE	MASTER QTY.
EZLB200	PVC	2"	2



**Southwire™**

# CONDUIT BODIES CATALOG

**get social with us:**



[/SOUTHWIRETOOLS](#)



[/SOUTHWIRE-COMPANY](#)



[@SOUTHWIRETOOLS](#)



[@SOUTHWIRE](#)



SCAN TO LEARN MORE

[WWW.SOUTHWIRE.COM](http://WWW.SOUTHWIRE.COM) | 1-855-SWT00LS

All Trademarks or Registered Trademarks (TM/®) are owned or licensed by Southwire Company.  
Any other TM/®- Trademark or Registered Trademark of Southwire Company.